

Grab-and-Go Open Front Refrigerated Display Case - Black

SKU: 70000-216 70000-217 70000-218 70000-219



Elevate your retail space with these stylish refrigerated merchandisers, designed to enhance product visibility and attract more customers.

These units offer a sleek and elegant way to display your products while using eco-friendly R290 refrigerant for efficient, sustainable cooling. With a controlled temperature range to keep items fresh, a digital temperature controller for precise adjustments, and a night curtain for energy savings, these units are both functional and efficient. Equipped with four castors - two with brakes - they provide easy mobility and stability. The ventilated cooling system and automatic defrost function ensure consistent performance, while four spacious shelves allow for a well-organized display.

FEATURES:

- **Bright LED Illumination**
Top-mounted lighting enhances product visibility
- **Digital Temperature Control**
Easy-to-use controller with a clear display for precise adjustments
- **Energy-Saving Night Curtain**
Helps conserve energy during non-business hours
- **Smooth Mobility & Stability**
Equipped with four castors, two with brakes for secure placement
- **Efficient Ventilated Cooling**
Ensures even air circulation for consistent refrigeration
- **Automatic Defrost Function**
Maintains optimal performance with minimal maintenance

2 YEARS
WARRANTY
PARTS & LABOUR
5 YEARS ONLY
ON COMPRESSOR




TECHNICAL SPECIFICATION				
SKU	70000-216	70000-217	70000-218	70000-219
Width	36"	48"	60"	72"
Capacity	19.77 cu.ft. 560L	26.83 cu.ft. 760L	33.9 cu.ft. 960L	40.96 cu.ft. 1160L
Number of Doors	1 Pull Down Curtain			
Number of Shelves	4			
Shelf Dimensions	30.1" x 12.3" 764 x 312 mm	41.9" x 12.3" 1064 x 312 mm	53.7" x 12.3" 1364 x 312 mm	65.5" x 12.3" 1664 x 312 mm
Shelf Material	Glass			
Exterior Material	Glass / Painted Metal			
Interior Material	Plastic / Painted Metal / Stainless Steel			
Number of Casters	4			
Power	1320W	1600W	1880W	2050W
Lamp Power	50W	75W		
Amps	14A	15.5A	11A	
Electrical	110V / 60Hz / 1Ph		220V / 60Hz /1Ph	
Temperature Range	2°C - 10°C 35.6°F - 50°F			
Refrigerant	R290			
Injection	490g		250g x 2	
Insulation Material	C5H10			
Type of Climate	3			
Interior Dimensions (WDH)	32.9" x 21.1" x 51.2" 835 x 535 x 1300 mm	44.7" x 21.1" x 51.2" 1135 x 535 x 1300 mm	56.5" x 21.1" x 51.2" 1435 x 535 x 1300 mm	68.3" x 21.1" x 51.2" 1735 x 535 x 1300 mm
Net Dimensions (WDH)	37" x 29" x 80" 939 x 736 x 2032 mm	48.4" x 29" x 80" 1230 x 738 x 2030 mm	60.2" x 29" x 80" 1530 x 738 x 2030 mm	72" x 29" x 80" 1830 x 738 x 2030 mm
Net Weight	396.8 lb. 180 kg.	486.1 lb. 220.5 kg.	555.6 lb. 252 kg.	646 lb. 293 kg.
Gross Dimensions (WDH)	39" x 31.5" x 88" 991 x 800 x 2235 mm	51" x 31.5" x 88" 1300 x 800 x 2235 mm	63" x 31.5" x 87.8" 1600 x 800 x 2230 mm	75" x 31.5" x 88" 1905 x 800 x 2235 mm
Gross Weight	443 lb. 201 kg.	525 lb. 238 kg.	600 lb. 272 kg.	796 lb. 361 kg.


* These units are designed for indoor use in environments where the ambient temperature does not exceed 32°C (90°F) and the relative humidity remains below 55%.




TECHNICAL DRAWINGS

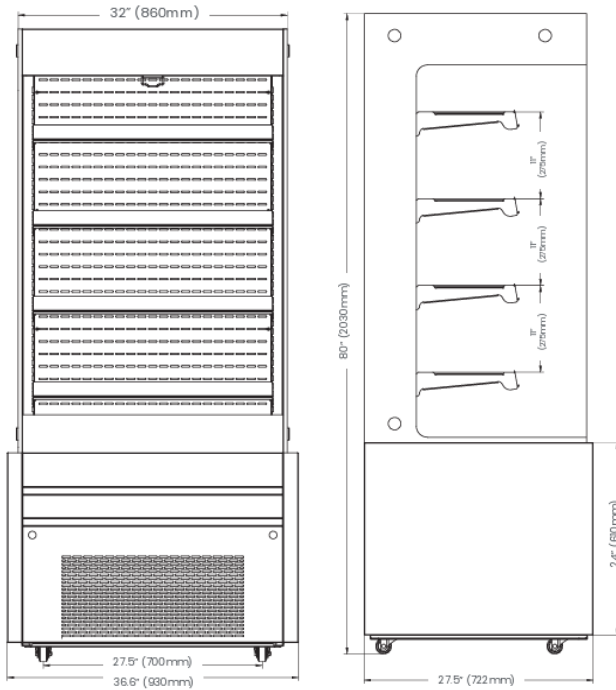


70000-216

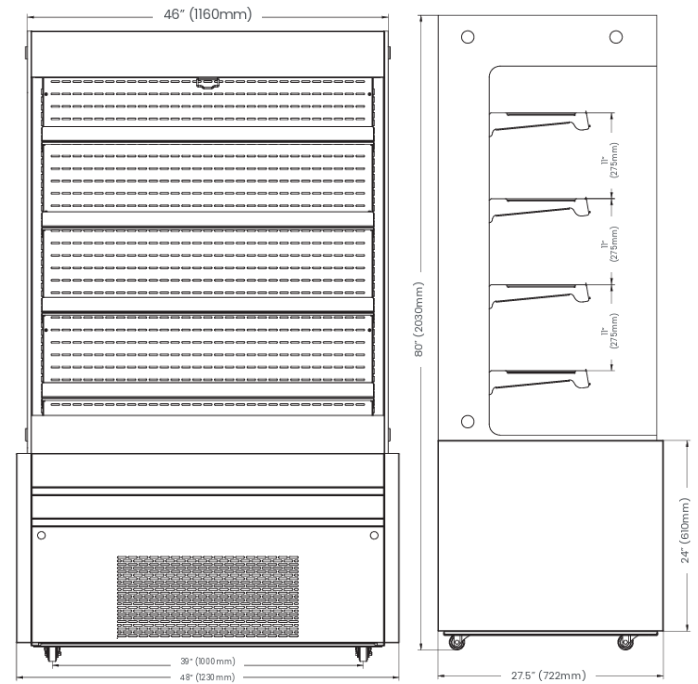

70000-217

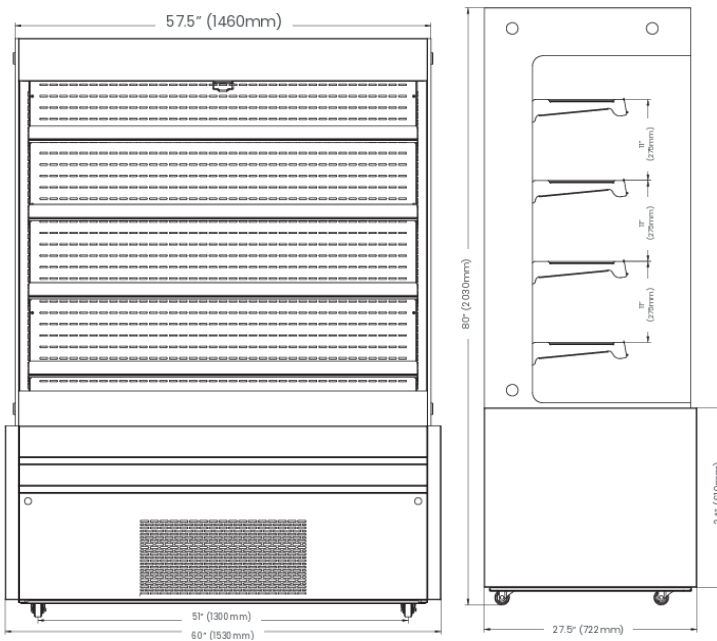

70000-218

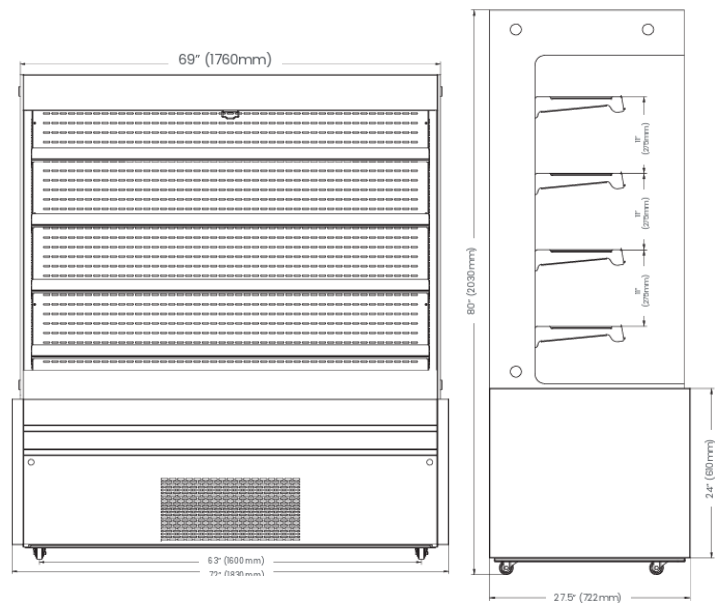

70000-217