

Installation Instructions

Light Bulb Installation or Change

LIGHT BULB AND LIGHT COVER INSTALLATION PROCEDURES

Prior to putting the shelves in and front doors on install the lights and light covers. The location for the light bulbs and covers is the front of the equipment. See Figure 5 for reference.

- 1. Remove the light covers and light bulbs from their packaging.
- 2. Slide the light bulb (A) in the lower receptacle slot (B). See Figure 1.

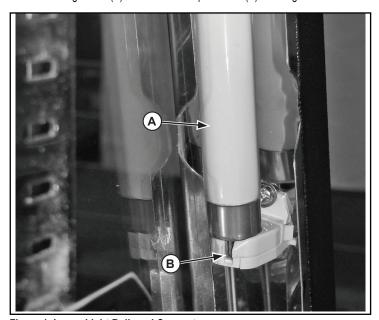


Figure 1. Lower Light Bulb and Connector.

3. Slide the light bulb (A) into the upper receptacle slot (C). See Figure 2.

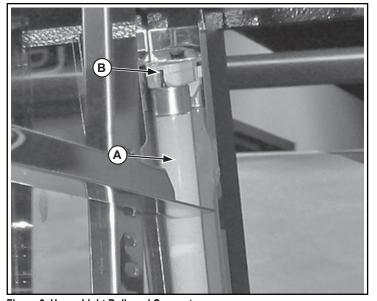


Figure 2. Upper Light Bulb and Connector.

4. Rotate the light bulb (A) until it snaps into place correctly seating into the receptacles (B). See Figure 3.

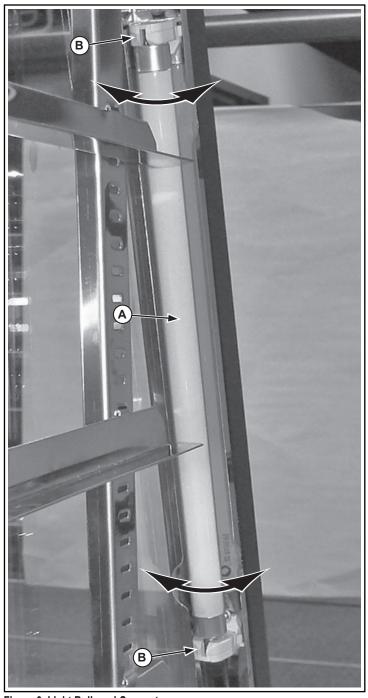


Figure 3. Light Bulb and Connectors.

5. Install the light cover (F) into bracket (E). Set the cover edge (A) on the inside of bracket edge (B). Starting at the bottom, press the light cover edge (C) on the inside of light bracket (D) continue to the top.

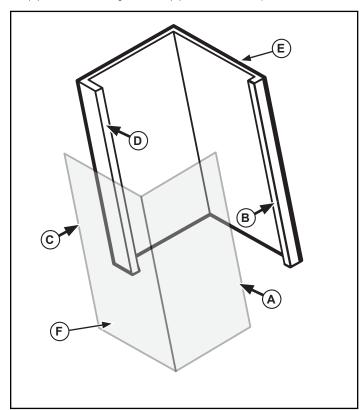


Figure 2. Upper Light Bulb and Connector.

6. Repeat steps 1-5 for the other side.

CHANGING THE LIGHT BULB OR LIGHT COVER PROCEDURES

To Change the light bulb or the light cover.

- 1. Remove front doors from the unit.
- 2. Remove the shelves from the unit.
- 3. To remove an old light cover and or an old light bulb, reverse steps 1-6 in the *Light Bulb and Light Cover Installation Procedures* section.
- 4. To install anew light cover and or a new light bulb by following steps 1-6 in the *Light Bulb and Light Cover Installation Procedures* section.

SHELF BRACKETS, SHELF SUPPORT AND DOOR INSTALLATION PROCEDURES

- 1. Install light bulbs (A) and light covers as previously described.
- 2. Install the shelf supports (B) into the base and top of unit. See Figure 5.
- 3. Install the shelf brackets (C) into the supports (B) so that the locking tabs are pointing to the back of the unit as shown.
- 4. Install the taller set of doors (E) on the front of the unit so that the handles (F) are towards the outside
- Install the shorted doors on the back of the unit so the handles are towards the outside.

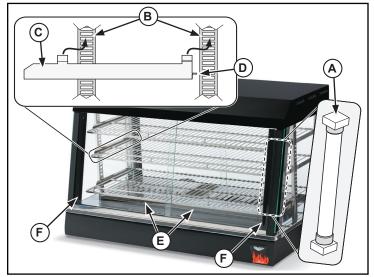


Figure 5. Doors, Light, Shelf Brackets and Shelf Support.



www.vollrathco.com

The Vollrath Company, L.L.C. 1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A.

Main Tel: 800.628.0830 Fax: 800.752.5620 Technical Services: 800.628.0832

Service Fax: 920.459.5462

Canada Service: 800.695.8560

© 2011 The Vollrath Company, L.L.C.