



MODELS

KGH-OF-(30, 40, 50, 60, 80, 100)-S

KGH-OF-(30, 40, 50, 60, 80, 100)-R

**GRAB-N-GO
HIGH PROFILE CASE**

CASE HOLDS 36°F TO 40°F • FORCED AIR REFRIGERATION • OPEN FRONT
FRONT LOADING • LED LIGHTING IN CANOPY AND UNDER SHELVES
PULL DOWN NIGHT CURTAIN • CASES CAN BE MULTIPLEXED



AUTODESK®
REVIT®

SELF CONTAINED	Model	O.A. Length (inches)	Volume FT ³	Electrical							Weight lbs		Crate Size (inches)		
				Compressor			LIGHTS Fans HTRS	Evap PAN	Total Amps 115 V	Total Amps 230 V	No Crate	With Crate	L"	W"	H"
				H.P	F.L.A 115V	F.L.A 230V									
	KGH-OF-30-S	29.2	15.9	3/4	16.0	N/A	1.40	3.3	20.7	N/A	408	542	32.2	32.5	85.4
	KGH-OF-40-S	41	23.3	1	16.2	N/A	1.80	8.3	26.3	N/A	463	633	44	32.5	85.4
	KGH-OF-50-S	50.2	29.1	1	16.2	N/A	2.40	8.3	27.0	N/A	514	728	53.2	32.5	85.4
	KGH-OF-60-S	60.6	35.6	1-1/4	N/A	9.2	2.46	8.3	10.8	9.2	580	818	63.6	32.5	85.4
	KGH-OF-80-S	78.2	46.6	2 x 1	N/A	2 x 8.2	2.91	8.3	11.2	16.4	752	1049	81.2	32.5	85.4
	KGH-OF-100-S	96.6	58.2	2 x 1	2 x 16.2	N/A	2 x 2.4	2 x 8.3	2 x 27	N/A	939	1285	99.6	32.5	85.4

REMOTE	Model	O.A. Length (inches)	115 Volts Total Amps	B.T.U	Weight lbs	
					No Crate	With Crate
	KGH-OF-30-R	29.2	0.85	4793	342	476
	KGH-OF-40-R	41	0.90	6940	353	523
	KGH-OF-50-R	50.2	1.30	7565	404	617
	KGH-OF-60-R	60.6	1.36	9383	463	701
	KGH-OF-80-R	78.2	1.81	13881	562	860
	KGH-OF-100-R	96.6	2.60	14921	691	1043

STANDARD FEATURES


Tempered side glass
CFC free injected foam insulation
Silver colored PVC coated steel front panel
PVC coated steel gray interior
Black steel kick plate
Foamed polystyrene black end panels
Height adjustable shelves can be tilted
Products stop on all shelves
Temperature and defrost regulated by a digital controller
Removable condensate evaporating pan for easy cleaning on self contained units
Slide out condensing unit on self-contained units
Digital thermometer
Levelling feet


OPTIONAL FEATURES


Stainless steel interior and / or exterior
Other colors available
Solid or full view end panels
Additional shelves
Joining Kit
Partition and or / product dividers
Price tag molding
Condensate evaporating pan for remote cases
Casters add 4-3/8" to height
Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

 Tel: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100

 Tel: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / toll free: 877.453.8832

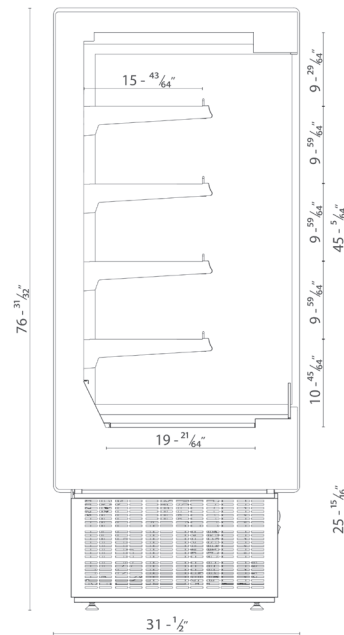

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 or 8.3 amps added to the amp load. Remote cases must be hard wired – no plugs.

