

[illegible]

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch



Disappearing insulated door



	Air temp.	Water temp.	lbs
	50° F	50° F	60
	70° F	60° F	55
	90° F	70° F	45

2 Years Warranty

subject to limitations



**Energy Verified
Rendement
Énergétique Vérifié**






Ice Cube

CB 249A 2018



Self-contained ice maker - Sprayer system Daily production up to 60 lbs

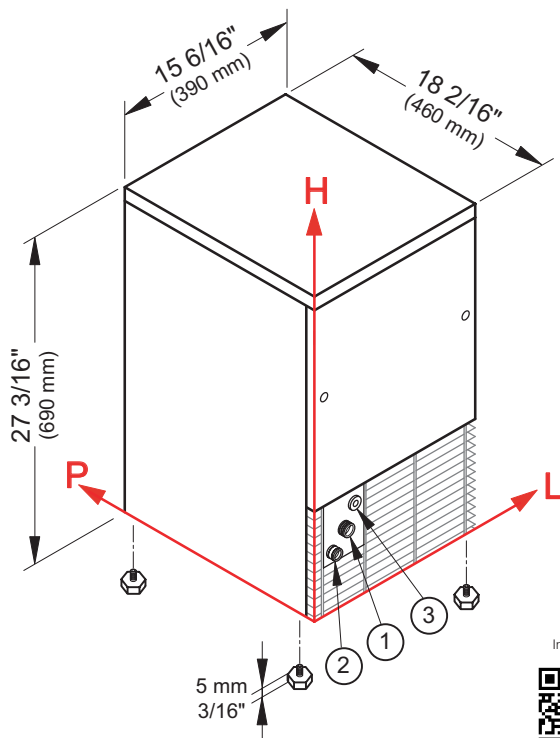

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+50° F	+110° F
Water temperature	+37° F	+90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water in.: 4 6/16" - 6 14/16" - 3/4"

② Water out.: 1 15/16" - 5 2/16" - 15/16"

③ Electrical connections: 6 2/16" - 8 5/16"

► Technical information

Production in 24h	45 lbs
Store capacity, up to	20 lbs
Cooling system	A
Kind of cube	A-18g, D-13g
Refrigerant	R404A
Standard voltage	115 V ~ 60 Hz
Average power consumption	400 W

Fuse	10 A
Water consumption	65 gal/100 lbs
Sizes (L-P-H in)	15 6/16 - 18 2/16 - 27 3/16
Sizes with pack (L-P-H in)	17 5/16 - 20 8/16 - 34 10/16
Net weight	82 lbs
Gross weight	97 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:
Sizes without feet
Standard Cube (18 g)
Production at Ambient temperature +90° F / Water temperature +70° F
Water consumption at Ambient temperature +90° F / Water temperature +70° F
Average power consumption at +109° F

Models and specifications are subject to change without notice

Rev. 02 - Issued May 2018



www.bremaice.it
info@bremaice.it

