

SPIKA NG 360

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES FULL DICE ICE CUBES OR HALF DICE ICE CUBES.
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME.
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV.
- ▶ SMART FRONT VENTILATION SYSTE, (SFVS) ALLOWS BUILT-IN INSTALLATION OF THE UNIT.
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKLIN OR SIMILAR) WITHOUT COOLING.
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER.
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY.
- ▶ ELECTRONIC CONTROL THAT ENHANCES THE PERFORMANCE OF THE MACHINE AND ALLOWS IT TO ADAPT TO EXTREME CLIMATES.
- ▶ NATURAL GAS R290 WITH VERY LOW GLOBAL WARMING POTENTIAL WHICH ALSO REDUCES THE ENERGY CONSUMPTION.
- ▶ LED ON/OFF SWITCH / PCB MOUNTED AT THE BOTTOM.
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 37" TO 39".



 24 H	 70°F/21°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 STOCK	 in (mm)	 in (mm)	 SPIKA HALF DICE 0.9" (W) x 0.43" (D) x 1.02" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions
lbs 24 H	lbs (Kg)	lbs (Kg)	lbs (Kg)	lbs (Kg)	in (mm)	in (mm)	 SPIKA FULL DICE 1.02" (W) x 0.9" (D) x 1.02" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions	
SPIKA NG 360 A	353 (152)	282 (128)	99 (45)	99 (45)	Width 30" (762) Depth 30" (762) Height* 32.76" (832)	Width 33.08" (840) Depth 32.48" (825) Height 37.41" (950)		
SPIKA NG 360 W	-	-						

* WITH LEGS 37"/39"

ACCESSORIES

INCLUDED



11" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-111 K



11" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS11




SCALE KLEEN


TECHNICAL SCHEME

SPIKA NG 360


SIDE VIEW

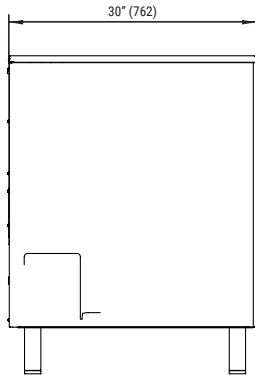

FRONTAL VIEW

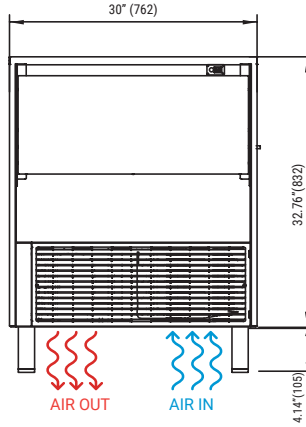

REAR VIEW

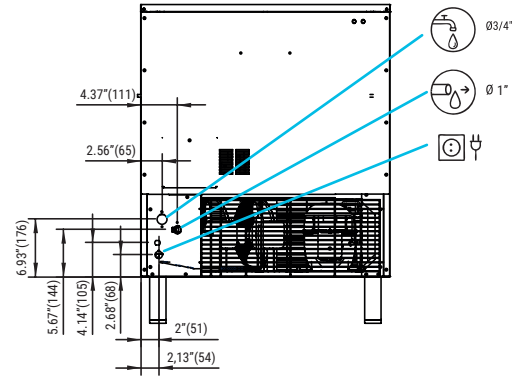

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

±10% V


41°F/109°F

41°F/95°F

14.5 psi (1 bar) / 87 psi (6 bar)

144/288 Ice cubes/cycle

V	Hz	ph
115	60	1N



FULL DICE

SPIKA NG 360 AIR COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	335	344	348	337
68° 21°	353	346	337	331
90° 32°	302	298	282	271
109° 43°	247	243	227	214

FULL DICE

SPIKA NG 360 WATER COOLED

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	-	-	-	-
68° 21°	-	-	-	-
90° 32°	-	-	-	-
109° 43°	-	-	-	-

MODELS

SPIKA NG 360 A

SPIKA NG 360 W

	 ASHRAE CONDITIONS (BTU/h) (W)	 (W) 109°F	 (AWG/mm²) (n.)	 FUSE	 100lbs 90°F / 70°F (Kwh/100 lbs)	 gal 100lbs (l/h)	 HEAT REJECTED (BTU/h) (W)	 (lbs)	 (lbs)
	6,791 1,989	750	16/1,5 3	16	5.8	23 10.2	5,353 1,568	163	187,5
	- -	-	-	-	-	- -	- -	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions



VERTICAL SYSTEM