

# SAP 015 P

SAP 015 P

## MODEL

**SPIDOGLOSS SAP015P**

- |                                |                                  |
|--------------------------------|----------------------------------|
| • <b>Black smooth surfaces</b> | • <b>Max. temperature 752 °F</b> |
| • <b>Manual Control</b>        | • <b>Glass ceramic</b>           |



## DESCRIPTION

Professional Contact Cooking System with Glass Ceramic plates, suitable for cooking a wide array of different foods, as such: toast, sandwich, meat, fish, vegetables, eggs, etc. High quality cooking result thanks to heat distribution uniformity and use of shock resistance, non-stick, non-porous and impermeable to smells and tastes Glass Ceramic Cooking Surfaces.

High versatility of use thanks to **SHB™ Plus** technology which allows combined heating (contact + infrared) and high cooking Temperature setting.

Up to 60% saving in Preheating Time thanks to **SHB™ Plus**.

Up to 60% saving in Energy consumption thanks to the **Protek.Safe™** high efficiency insulation system which eliminates unnecessary energy loss.

## STANDARD COOKING FEATURES

### SETTINGS:

- Manual Control
- Temperature set: 248 °F – 752 °F.

## STANDARD TECHNICAL FEATURES

- **Medium Black Smooth Glass Ceramic cooking plate :**  
n°1 15 3/4"x11 13/16" in
- Stainless Steel Case
- Ergonomic Handle
- Self-looking Handle Bracket
- 4 Non-Slip Feets
- Removable Dip Tray
- ON/OFF button and LED light


## ACCESSORIES

- **METAL SCRAPER**  
Metallic scraper for Glass Ceramic Surfaces (included)
- **SPIDO CLEAN SPRAY DETERGENT**  
750 ml Spray Detergent for Glass Ceramic and Steel Surfaces (to be purchased separately)



# SAP 015 P

Views  
Connection positions  
Dimensions and Weights  
Installation requirements  
Power supply

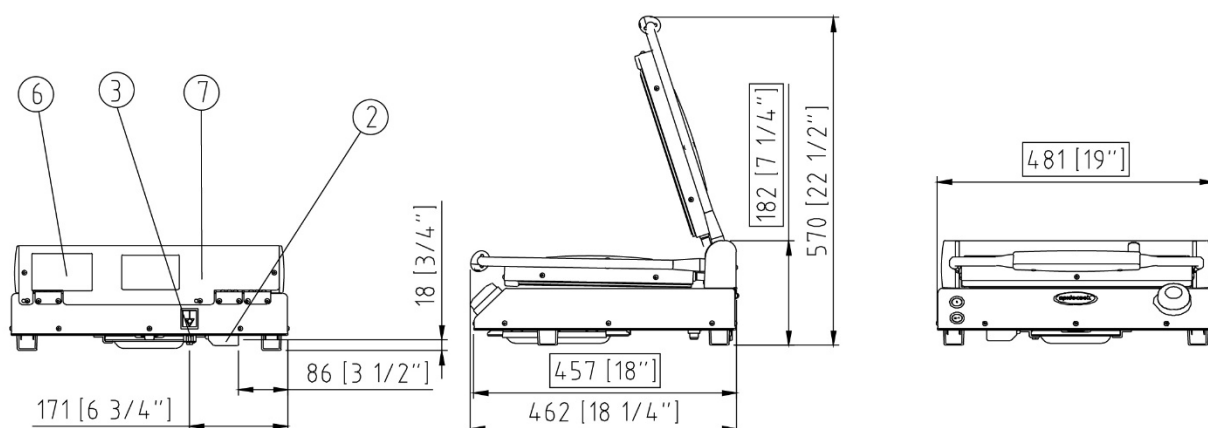

## CONNECTION POSITIONS

2	Terminal board power supply
3	Unipotential terminal
6	Technical data plate
7	Safety thermostat

## INSTALLATION REQUIREMENTS

Installations must conform to all local electrical systems, specifically minimum wire gauge required for field connection, hydraulic and ventilation codes.

## DIMENSIONS AND WEIGHT

Width	19"
Depth	18 1/4"
Height	7 1/4"
Net Weight	32,8 lb


## POWER SUPPLY

	STANDARD
Voltage	240 V
Phase	1PH+N+PE
Frequency	60 Hz
Power	3.1 kW
Maximum Amp Draw	12.9 A
Power cable requirement	SJTO 3 x AWG14
Plug	NEMA 6-20P

# SAP 015 P

Wiring diagrams

SAP 015 P

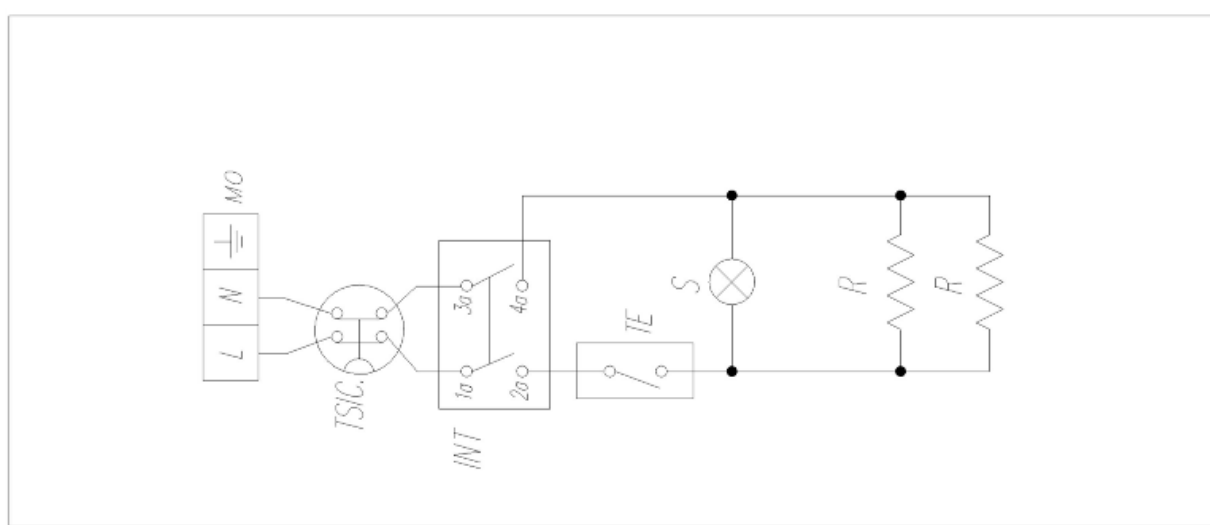

## WIRING DIAGRAMS

INT	Switch
MO	Terminal board
R	Heating element
S	Pilot light
TE	Thermostat
TS	Safety thermostat