

# Cook & Hold Oven

## 300-TH

ALTO-SHAAM

Original Cook & Hold Ovens produce better food quality and higher yields with built-in savings.

Gentle, radiant Halo Heat® technology evenly surrounds food without the use of extremely hot elements, added humidity or fans. This controlled, uniform heat maintains precise temperatures throughout the cooking and holding process—improving food quality and extending hold times.

Cook by time or probe with Simple or Deluxe controls. Probes sense internal product temperature and automatically convert the oven from cook mode to hold mode once set parameters have been reached.

Labor-free, overnight cooking and effortless operation reduces labor costs and increases productivity.

Place anywhere with a ventless, waterless design. Lower costs with energy efficient operation and no water hookups or traditional kitchen hood required. All Alto-Shaam Cook & Hold Ovens are EPA 202 Certified ventless.

Advanced controls – designed intentionally simple – feature an intuitive, user-friendly interface and programmable recipes to ensure consistency with each cook.

ChefLinc™, cloud-based remote oven management software, streamlines processes and maximizes profits with data-driven insights [Deluxe model only].

ISO 9001:2015-certified

### Standard Features

- 19mm non-skid rubber feet
- Single-point, straight removable probe
- Drip tray and drip pan
- Programmable, touchscreen control on Deluxe model
- Programmable control on Simple model
- HACCP data collection on Deluxe model
- Easy recipe upload/download via USB port
- SureTemp™ heat recovery on Deluxe model
- Two (2) stainless steel side racks with seven (7) pan positions spaced 35mm on centers
- Removable exterior drip tray



CAPACITY

**3** GN 1/1—530mm x 325mm x 100mm

**6** G/N 1/2—265mm x 325mm x 65mm

Weight maximum: 16 kg

Volume maximum: 21.3 liters

Two (2) shelves included. Additional shelves required for maximum capacity.



Shown with Deluxe control



Shown with Simple control

**300-TH**

### Configurations (select one each)

#### Models

- ☐ Simple
  - ☐ HACCP option
- ☐ Deluxe
  - ☐ Ethernet option (5032090)

#### Door Choice

- ☐ Right hinged, solid door, standard
- ☐ Left hinged, solid door

#### Electrical

- ☐ 230V, 1PH

#### Casters

- ☐ 76mm casters, two (2) rigid two (2) swivel with brake, option (5029959)

### Optional Accessories (select all that apply)

#### Additional Probes

- ☐ Sous vide probe (PR-36576)
- ☐ T-handle probe, up to three (3) with Deluxe (PR-46998)
- ☐ Straight probe, up to three (3) with Deluxe (quantity one (1) included with oven) (PR-46999)

#### Shelves and Holders

- ☐ Shelf, stainless steel (SH-2326)
- ☐ Carving holder, prime rib (HL-2635)
- ☐ Carving holder, steamship (cafeteria round) (4459)

#### Cleaners

- ☐ Alto-Shaam, non-caustic cleaner one (1) one-liter bottle (CE-46828)
- ☐ Alto-Shaam, non-caustic cleaner six (6) one-liter bottles (CE-46829)





On all Cook & Hold heating elements [excludes labor]



IP X4

# Cook & Hold Oven

## 300-TH

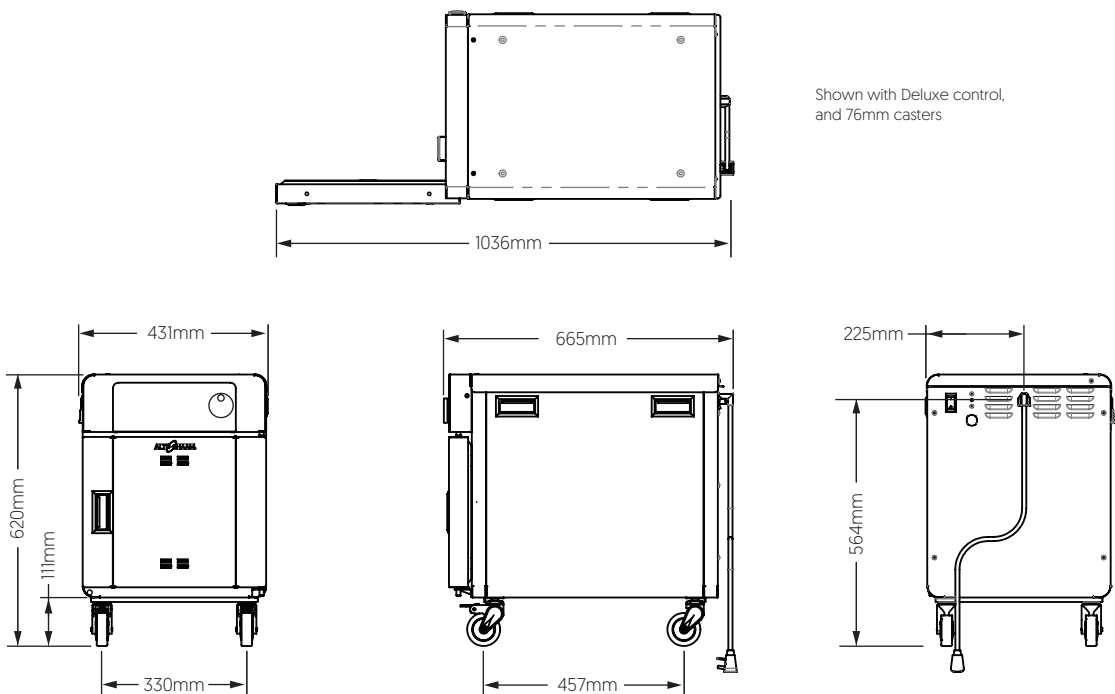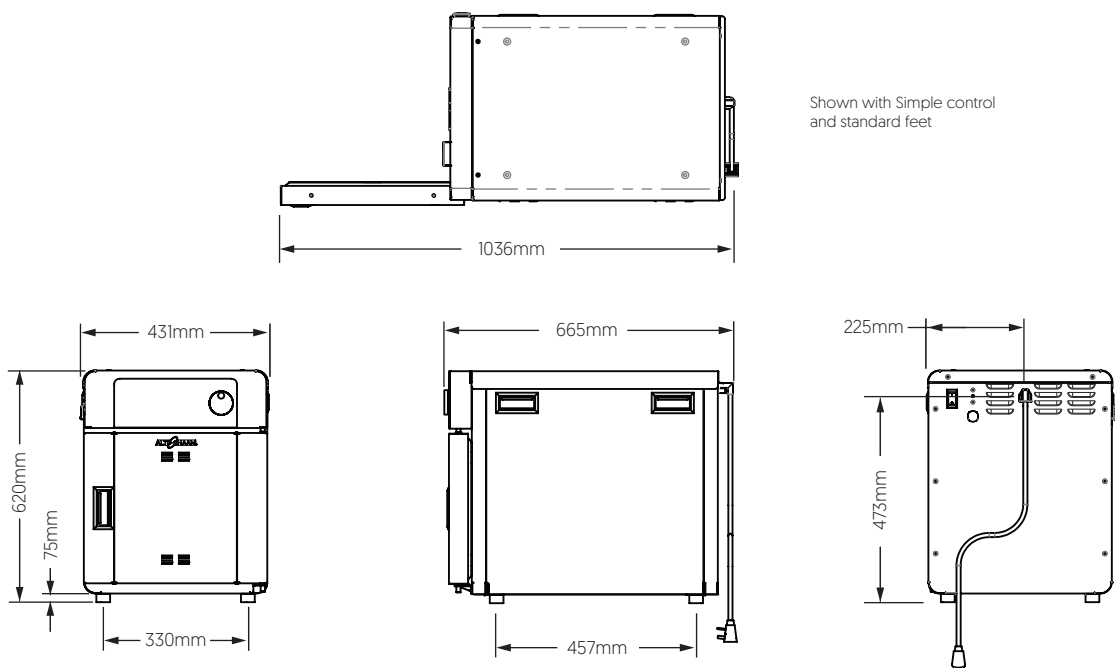

Interior (H x W x D)	Net Weight	Ship Dimensions (L x W x H)	Ship Weight
318mm x 348mm x 546mm	45 kg	889mm x 584mm x 1041mm	75 kg

# Cook & Hold Oven

## 300-TH



CLEARANCE

Top:..... 51mm  
Left: ..... 51mm  
Right:..... 51mm  
Back: ..... 76mm



CHECK FIRST

The oven must be installed level.  
The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.



HEAT

### Heat of rejection

300-TH	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	162	0.05







TEMPERATURE

**Cooking temperature range:**  
94°C–163°C  
**Holding temperature range:**  
29°C–96°C



ELECTRIC

300-TH	V	Ph	Hz	Awg	IEC	A	Breaker (A)	kW	Plug Configuration
120V	120V	1	60	14	—	6.7	15	0.8	NEMA 5-15P 15A-125V plug 
230V	230V	1	50/60	14	—	3.2	16	0.8	CEE 7/7   BS-1363   CH2-16P Plugs rated 250V   

Electrical connections must meet all applicable federal, state, and local codes.

### CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)