

# Refrigerated Salad/Sandwich Prep Tables

SKU: 70000-010

12000-786

12000-177

12000-178

12000-179



12000-786



70000-010



12000-177




12000-178




12000-179

## Boost kitchen efficiency with Zanduco's Refrigerated Sandwich/Salad Prep Table! Designed for quick meal prep!

These prep tables features a spacious work surface, ample storage, eco-friendly R290 refrigerant, and durable stainless steel construction for hygiene and longevity. Streamline your workflow sustainably.




## TECHNICAL DRAWING

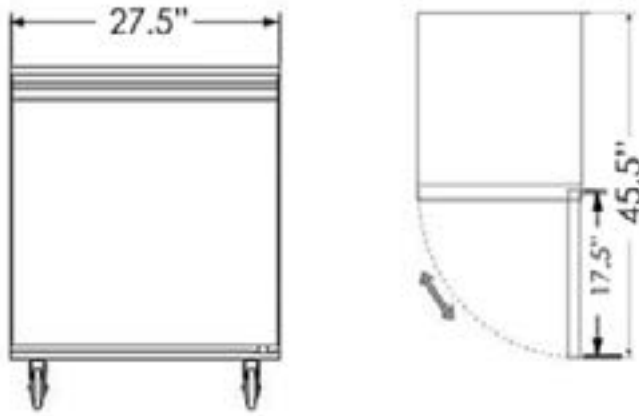

Front

Top

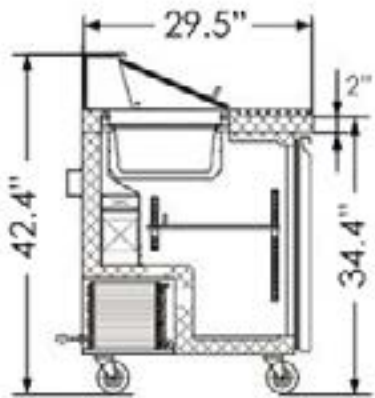

Side

## TECHNICAL SPECIFICATION

SKU	12000-786
Capacity	201L   7.1 cu.ft.
Temperature Range	0.5 - 5°C   33 - 41°F
Max Ambient Temp Rating	32°C   90°F
Power	360W
Amps	3.6A
Electrical	110V / 60Hz / 1Ph
Refrigerant	R290
Isolation Material	Cyclopentane
Cooling System	Ventilated
Defrosting	Automatic
Type of Controller	Digital
Self-closing Door	Yes
Number of Doors	1
Number of Shelves	1
Number of Casters	4
Shelf Loading Capacity	88 lbs.   40 kg.
Shelf Material	Plastic-coated
Number of Insert Pans	Eight 1/6 Pans
Interior Dimensions (WDH)	24.2" x 19.8" x 23.5" 615 x 504 x 597 mm
Exterior Dimensions (WDH)	27.5" x 29.5" x 42.3" 698 x 750 x 1075 mm
Net Weight	176.4 lbs.   80 kg.
Gross Dimensions (WDH)	32.7" x 34.6" x 45.7" 830 x 880 x 1160 mm
Gross Weight	216.1 lbs.   98 kg.

### FEATURES:

- **Ample Space;**  
Spacious workspace designed for efficient ingredient storage
- **Energy Efficiency;**  
Cyclopentane insulation maintains optimal food storage temperature while minimizing energy consumption
- **Durability;**  
Constructed with high-quality stainless steel for longevity, hygiene, and reliability

### • Convenience;

Equipped with a thick commercial-grade cutting board for seamless food prep and scratch protection


### • Mobility;

Heavy-duty casters ensure easy movement and protect floors from damage

### • Eco-Friendly;

Uses hydro-carbon R290 refrigerant, reducing energy costs by up to 28% while being environmentally sustainable

## TECHNICAL DRAWING

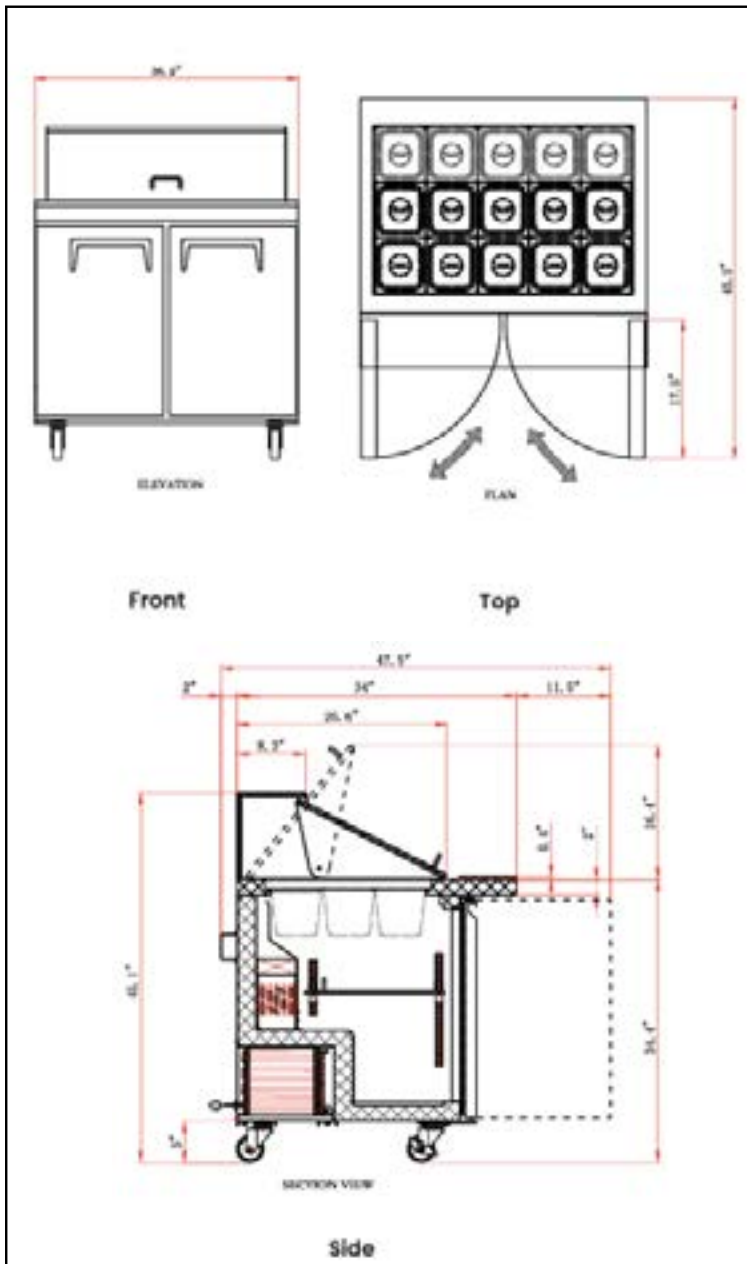

## TECHNICAL SPECIFICATION


SKU	70000-010
Capacity	258L   9.1 cu.ft
Temperature Range	0.5°C - 4.4°C   33°F - 40°F
Max Ambient Temp Rating	24°C   75°F
Power	430W
Amps	4.3A
Electrical	115V / 60Hz / 1Ph
Refrigerant	R290
Isolation Material	Cyclopentane
Cooling System	Ventilated
Defrosting	Automatic
Type of Controller	Digital
Self-closing Door	Yes
Number of Doors	2
Number of Shelves	2
Number of Casters	4
Shelf Loading Capacity	88 lbs.   40 kg.
Shelf Material	Plastic-coated
Number of Insert Pans	Ten 1/6 Pans
Interior Dimensions (WDH)	33" x 19.8" x 23.5" 837 x 504 x 597 mm
Exterior Dimensions (WDH)	36.2" x 29.5" x 42.3" 920 x 750 x 1075 mm
Net Weight	220.5 lbs.   100 kg.
Gross Dimensions (WDH)	41.4" x 34.6" x 45.7" 1052 x 878 x 1160 mm
Gross Weight	286.6 lbs   130 kg

### FEATURES:

- **Ample Space;**  
Spacious workspace designed for efficient ingredient storage
- **Energy Efficiency;**  
Cyclopentane insulation maintains optimal food storage temperature while minimizing energy consumption
- **Durability;**  
Constructed with high-quality stainless steel for longevity, hygiene, and reliability

- **Convenience;**  
Equipped with a thick commercial-grade cutting board for seamless food prep and scratch protection
- **Mobility;**  
Heavy-duty casters ensure easy movement and protect floors from damage
- **Eco-Friendly;**  
Uses hydro-carbon R290 refrigerant, reducing energy costs by up to 28% while being environmentally sustainable

## TECHNICAL DRAWING

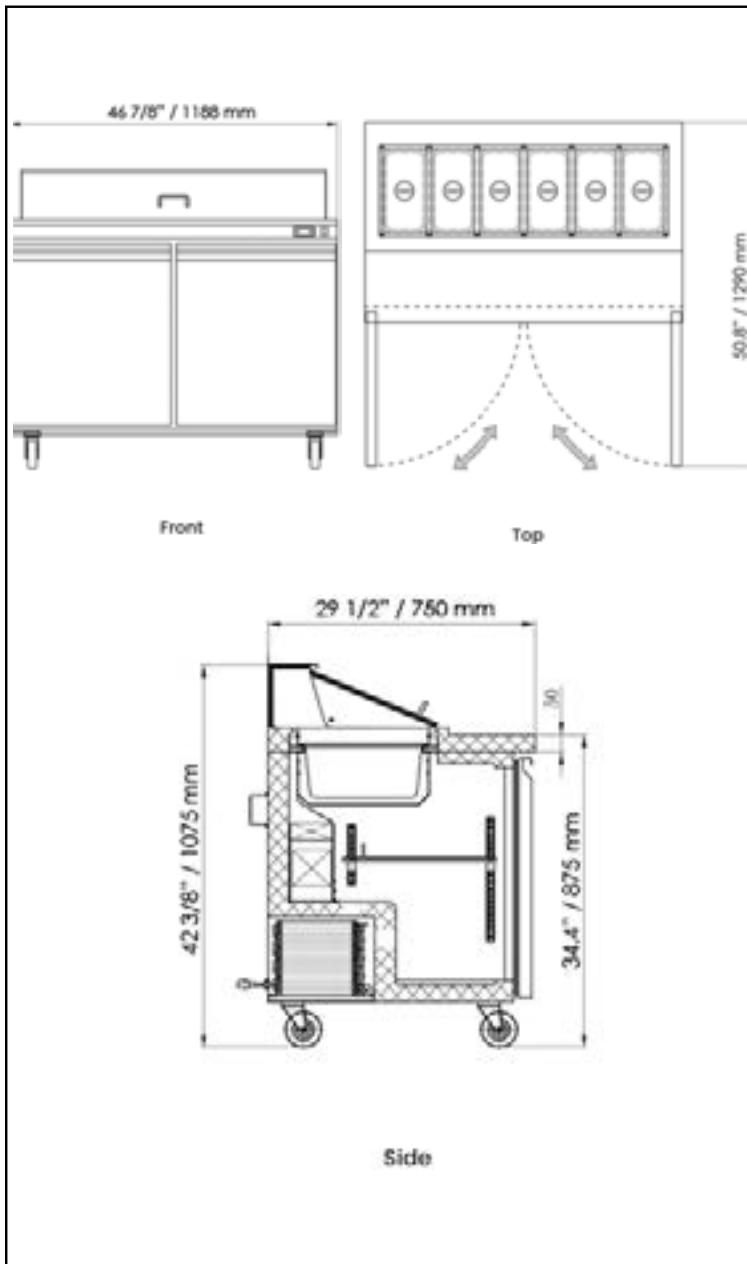

## TECHNICAL SPECIFICATION


SKU	12000-177
Capacity	357L   12.6 cu.ft.
Temperature Range	0.5°C - 5°C   33°F - 41°F
Max Ambient Temp Rating	32°C   90°F
Power	490W
Amps	4.9A
Electrical	110V / 60Hz / 1Ph
Refrigerant	R290
Isolation Material	Cyclopentane
Cooling System	Ventilated
Defrosting	Automatic
Type of Controller	Digital
Self-closing Door	Yes
Number of Doors	2
Number of Shelves	2
Number of Casters	4
Shelf Loading Capacity	88 lbs.   40 kg.
Shelf Material	Plastic-coated
Number of Insert Pans	Twelve 1/6 Pans
Interior Dimensions (WDH)	43" x 19.8" x 23.5" 1091 x 504 x 597 mm
Exterior Dimensions (WDH)	46.8" x 29.5" x 42.3" 1188 x 750 x 1075 mm
Net Weight	253.5 lbs.   115 kg.
Gross Dimensions (WDH)	52" x 34.6" x 45.7" 1320 x 880 x 1160 mm
Gross Weight	304.2 lbs.   138 kg.

### FEATURES:

- **Ample Space;**  
Spacious workspace designed for efficient ingredient storage
- **Energy Efficiency;**  
Cyclopentane insulation maintains optimal food storage temperature while minimizing energy consumption
- **Durability;**  
Constructed with high-quality stainless steel for longevity, hygiene, and reliability

- **Convenience;**  
Equipped with a thick commercial-grade cutting board for seamless food prep and scratch protection
- **Mobility;**  
Heavy-duty casters ensure easy movement and protect floors from damage
- **Eco-Friendly;**  
Uses hydro-carbon R290 refrigerant, reducing energy costs by up to 28% while being environmentally sustainable

## TECHNICAL DRAWING

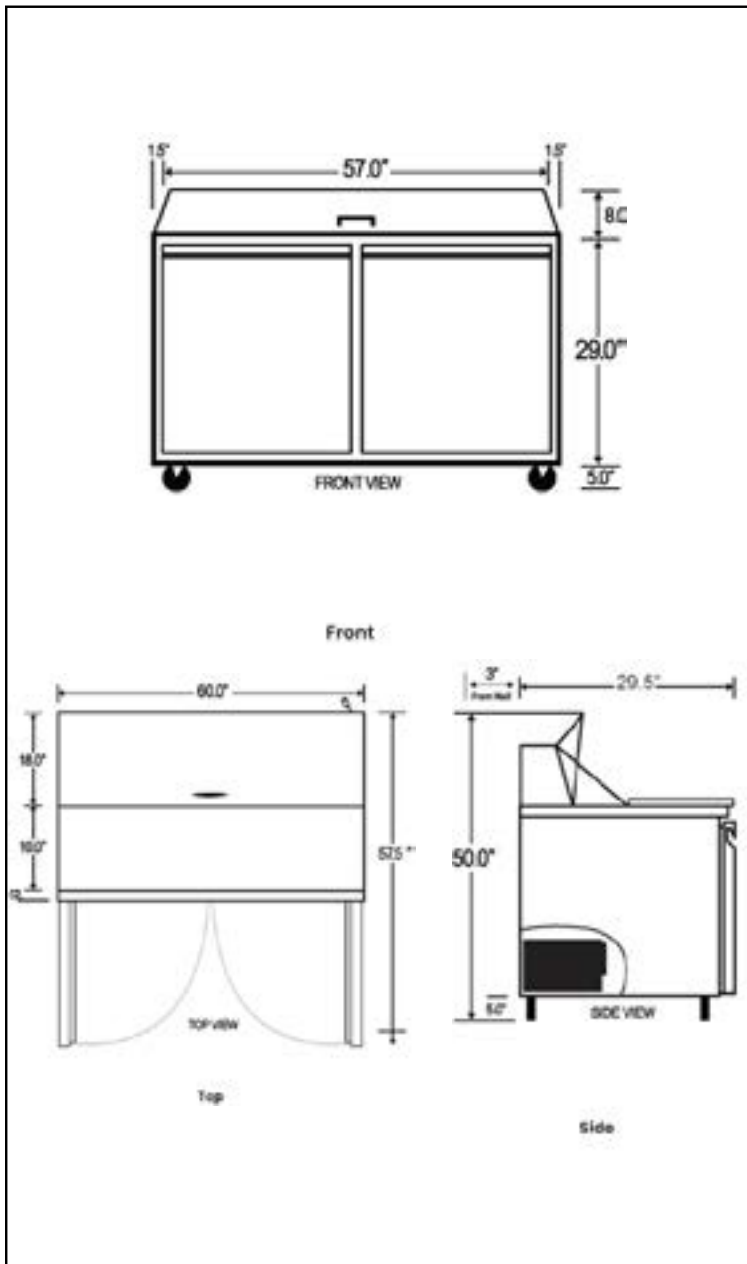

## TECHNICAL SPECIFICATION


SKU	12000-178
Capacity	469L   16.6 cu.ft.
Temperature Range	0.5°C - 5°C   33°F - 41°F
Max Ambient Temp Rating	32°C   90°F
Power	540W
Amps	5.4A
Electrical	110V / 60Hz / 1Ph
Refrigerant	R290
Isolation Material	Cyclopentane
Cooling System	Ventilated
Defrosting	Automatic
Type of Controller	Digital
Self-closing Door	Yes
Number of Doors	2
Number of Shelves	2
Number of Casters	4
Shelf Loading Capacity	88 lbs.   40 kg.
Shelf Material	Plastic-coated
Number of Insert Pans	Sixteen 1/6 Pans
Interior Dimensions (WDH)	56.5" x 19.8" x 23.5" 1434 x 504 x 597 mm
Exterior Dimensions (WDH)	60.2" x 29.5" x 42.3" 1529 x 750 x 1075 mm
Net Weight	319.7 lbs.   145 kg.
Gross Dimensions (WDH)	65.4" x 34.6" x 45.7" 1660 x 880 x 1160 mm
Gross Weight	416.7 lbs.   189 kg.

### FEATURES:

- **Ample Space;**  
Spacious workspace designed for efficient ingredient storage
- **Energy Efficiency;**  
Cyclopentane insulation maintains optimal food storage temperature while minimizing energy consumption
- **Durability;**  
Constructed with high-quality stainless steel for longevity, hygiene, and reliability

- **Convenience;**  
Equipped with a thick commercial-grade cutting board for seamless food prep and scratch protection
- **Mobility;**  
Heavy-duty casters ensure easy movement and protect floors from damage
- **Eco-Friendly;**  
Uses hydro-carbon R290 refrigerant, reducing energy costs by up to 28% while being environmentally sustainable

## TECHNICAL DRAWING

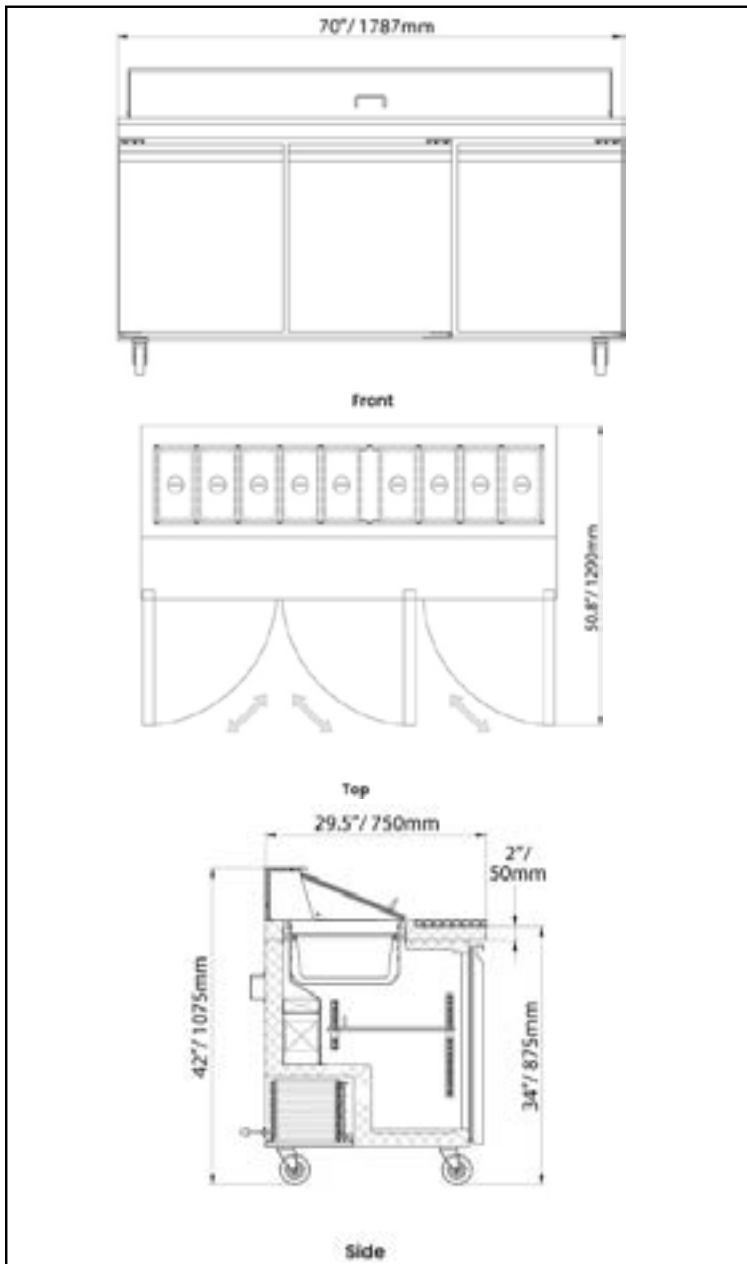

## TECHNICAL SPECIFICATION

SKU	12000-179
Capacity	553L   19.5 cu.ft.
Temperature Range	0.5°C - 5°C   33°F - 41°F
Max Ambient Temp Rating	32°C   90°F
Power	780W
Amps	7.8A
Electrical	110V / 60Hz / 1Ph
Refrigerant	R290
Isolation Material	Cyclopentane
Cooling System	Ventilated
Defrosting	Automatic
Type of Controller	Digital
Self-closing Door	Yes
Number of Doors	3
Number of Shelves	3
Number of Casters	4
Shelf Loading Capacity	88 lbs.   40 kg.
Shelf Material	Plastic-coated
Number of Insert Pans	Eighteen 1/6 Pans
Interior Dimensions (WDH)	66.6" x 19.8" x 23.5" 1691 x 504 x 597 mm
Exterior Dimensions (WDH)	70.4" x 29.5" x 42.3" 1787 x 750 x 1075 mm
Net Weight	343.9 lbs.   156 kg.
Gross Dimensions (WDH)	75.6" x 34.6" x 45.7" 1920 x 880 x 1160 mm
Gross Weight	451.9 lbs.   205 kg

### FEATURES:

- **Ample Space;**  
Spacious workspace designed for efficient ingredient storage
- **Energy Efficiency;**  
Cyclopentane insulation maintains optimal food storage temperature while minimizing energy consumption
- **Durability;**  
Constructed with high-quality stainless steel for longevity, hygiene, and reliability

- **Convenience;**  
Equipped with a thick commercial-grade cutting board for seamless food prep and scratch protection
- **Mobility;**  
Heavy-duty casters ensure easy movement and protect floors from damage
- **Eco-Friendly;**  
Uses hydro-carbon R290 refrigerant, reducing energy costs by up to 28% while being environmentally sustainable