


Curved Glass Refrigerated Floor Showcase

SKU: 70000-196 70000-197 70000-198

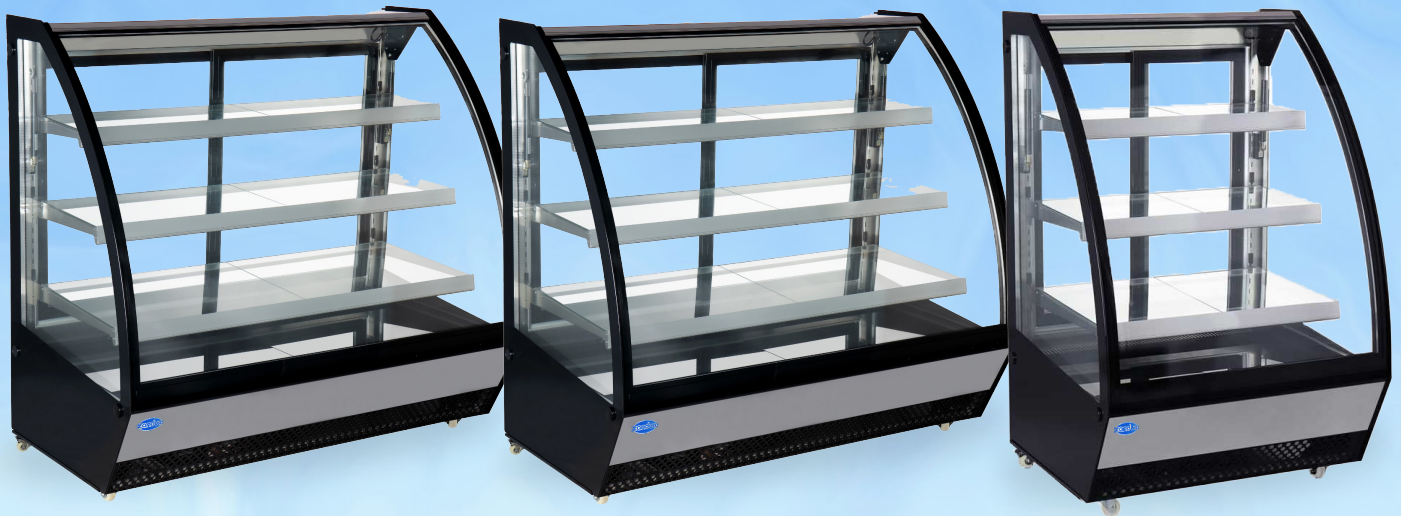

Showcase Your Food and Boost Impulse Sales

Zanduco's refrigerated floor model with curved glass is ideal for restaurants, dessert shops, sandwich stores, and cafés. Its sleek design features a smooth finish, curved glass, and a durable stainless steel body. The front hinge door allows easy access for cleaning, while the digital temperature controller and automatic defrost system ensure effortless operation. Perfect for attractively displaying food and driving impulse purchases.

FEATURES:

- **Adjustable Shelves**

Includes two chrome-plated, rust-resistant shelves, ideal for displaying desserts, pastries, cakes, beverages, yogurts, and fruit cups.

- **Durable Construction**

Made from high-quality stainless steel and double-pane tempered glass for long-lasting reliability


- **Dual Door Access**

Features a front hinge door for easy cleaning and back sliding doors for convenient item access



- **Efficient Refrigeration**

Uses eco-friendly R290 refrigerant and a bottom-mounted compressor for energy-efficient cooling

MADE IN CHINA



TECHNICAL DRAWING

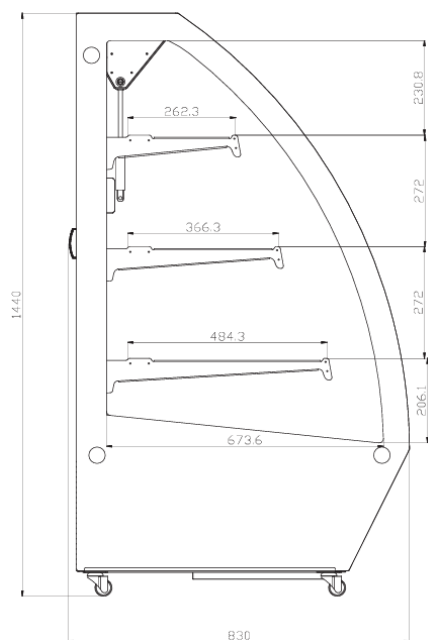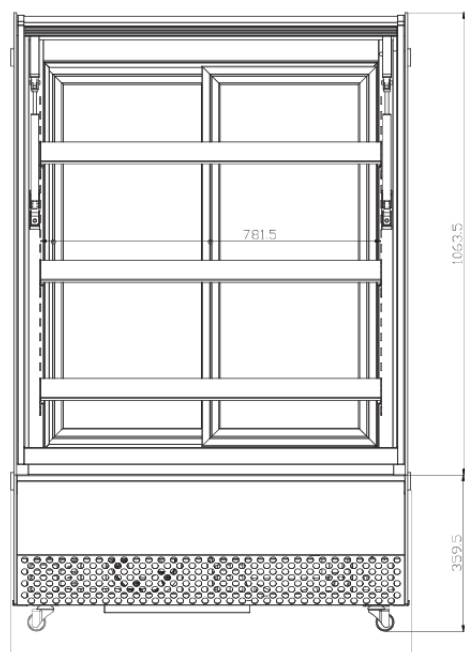


TECHNICAL SPECIFICATION

SKU	70000-196
Wide	36"
Capacity	467L 16.49 cu.ft.
Number of Doors	2 Doors (1 Front Hinge & 1 Back Sliding)
Number of Shelves	3
Shelf Capacity	55 lb. 25 kg.
Shelf Size	30.6" x 10.3" (778 x 262 mm) 30.6" x 14.4" (778 x 366 mm) 30.6" x 19" (778 x 484 mm)
Shelf Material	430 Stainless Steel + Aluminum
Interior Material	ABS + Glass
Exterior Material	430 Stainless Steel + Glass
Number of Casters	4
Power	415W
Lamp Power	10W
Amps	6.41A
Electrical	110V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	12°C to 0°C 54°F - 32°F
Refrigerant	R290A
Injection	150g
Type Of Climate	4
Insulation Material	C5H10
Defrosting	Automatic
Cooling System	Ventilated
Interior Dimensions (WDH)	33.27" x 26.5" x 40.75" 845 x 673 x 1035 mm
Net Weight	366 lb. 166 kg.
Net Dimensions (WDH)	36.2" x 32.6" x 56.7" 920 x 828 x 1440 mm
Gross Weight	441 lb. 200 kg.
Gross Dimensions (WDH)	39" x 35" x 60" 991 x 889 x 1524 mm

NEMA
5 - 15P
125VAC / 15 AMP



TECHNICAL DRAWING

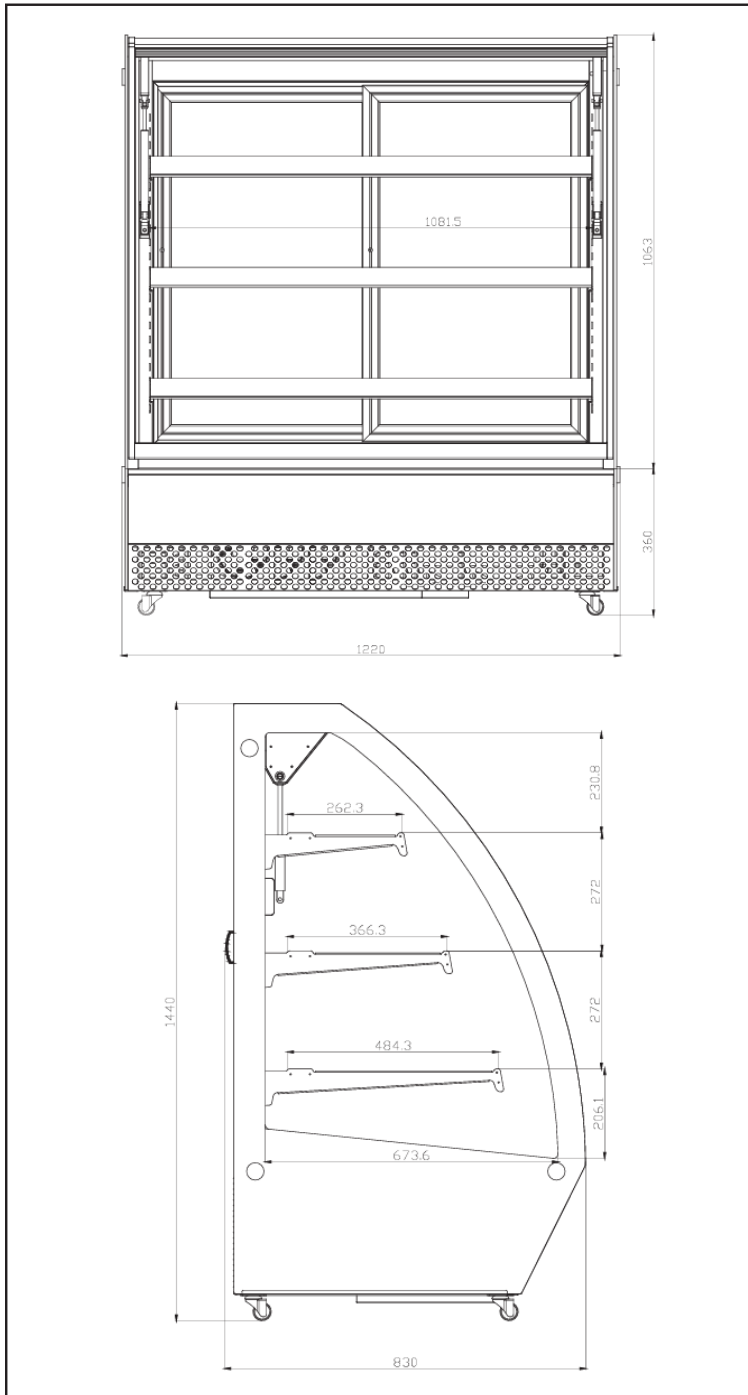


TECHNICAL SPECIFICATION

SKU	70000-197
Wide	48"
Capacity	633L 22.35 cu.ft.
Number of Doors	2 Doors (1 Front Hinge & 1 Back Sliding)
Number of Shelves	3
Shelf Capacity	55 lb. 25 kg.
Shelf Size	42.4" x 10.3" (1078 x 262 mm) 42.4" x 14.4" (1078 x 366 mm) 42.4 x 19" (1078 x 484 mm)
Shelf Material	430 Stainless Steel + Aluminum
Interior Material	ABS + Glass
Exterior Material	430 Stainless Steel + Glass
Number of Casters	4
Power	650W
Lamp Power	10W
Amps	7.3A
Electrical	110V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	12°C to 0°C 54°F - 32°F
Refrigerant	R290A
Injection	150g
Type Of Climate	4
Insulation Material	C5H10
Defrosting	Automatic
Cooling System	Ventilated
Interior Dimensions (WDH)	45" x 26.5" x 40.75" 1145 x 673 x 1035 mm
Net Weight	454.2 lb. 206 kg.
Net Dimensions (WDH)	48" x 32.6" x 56.7" 1220 x 828 x 1440 mm
Gross Weight	540 lb. 245 kg.
Gross Dimensions (WDH)	50" x 35" x 60" 1270 x 889 x 1524 mm

NEMA
5 - 15P
125VAC / 15 AMP



TECHNICAL DRAWING

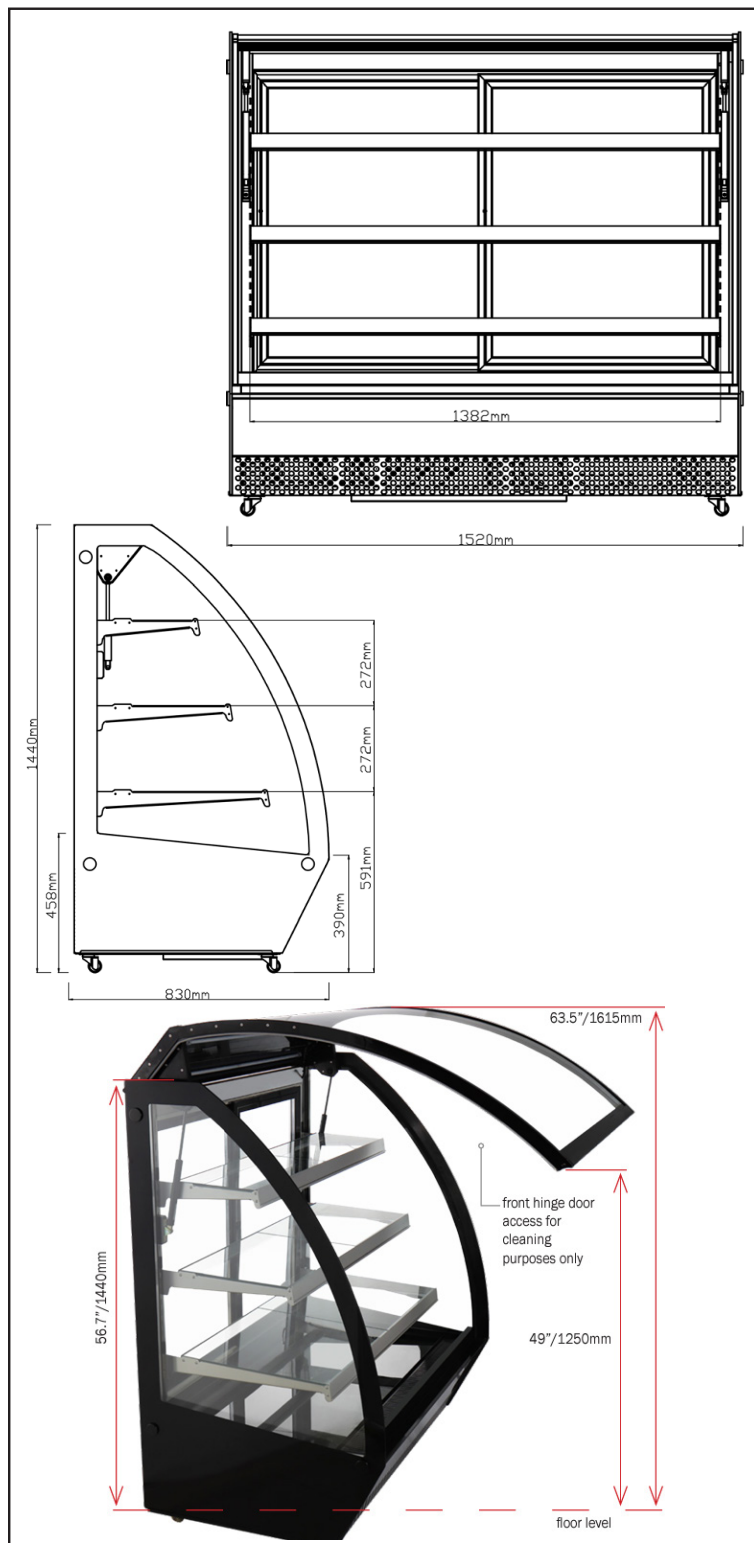

TECHNICAL SPECIFICATION

SKU	70000-198
Wide	60"
Capacity	799L 28 cu.ft.
Number of Doors	2 Doors (1 Front Hinge & 1 Back Sliding)
Number of Shelves	3
Shelf Capacity	55 lb. 25 kg.
Shelf Size	54" x 10.3" (1374 x 262 mm) 54" x 14.4" (1374 x 366 mm) 54" x 19" (1374 x 484 mm)
Shelf Material	430 Stainless Steel + Aluminum
Interior Material	ABS + Glass
Exterior Material	430 Stainless Steel + Glass
Number of Casters	4
Power	680W
Lamp Power	10W
Amps	6.2A
Electrical	110V / 60Hz / 1Ph
Temperature Controller	Digital
Temperature Range	12°C to 0°C 54°F - 32°F
Refrigerant	R290A
Injection	150g
Type Of Climate	4
Insulation Material	C5H10
Defrosting	Automatic
Cooling System	Ventilated
Interior Dimensions (WDH)	55" x 26.5" x 40.75" 1397 x 673 x 1035 mm
Net Weight	518 lb. 235 kg.
Net Dimensions (WDH)	59.8" x 32.6" x 56.7" 1519 x 828 x 1440 mm
Gross Weight	617 lb. 280 kg.
Gross Dimensions (WDH)	66" x 36" x 70" 1676 x 914 x 1778 mm

NEMA
5 - 15P
125VAC / 15 AMP

