

Grab-and-Go Open Refrigerated Floor Self-Serve Display

SKU: 70000-205 70000-206 70000-207




High-Performance Open Refrigerated Floor Display Case


Keep your products fresh and visible with this versatile open refrigerated display case, perfect for cafes, restaurants, supermarkets, and convenience stores. Its open design offers customers easy access to merchandise, while the included night curtain reduces power consumption during non-operational hours.

Bright internal LED lighting enhances product visibility, complementing the sleek design. Adjustable shelves allow you to customize the display to suit your needs, and the digital temperature controls ensure precise cooling for optimal freshness. Ideal for showcasing dairy products, fruits, vegetables, and beverages, this display case is designed to maximize space and functionality.

MADE IN CHINA



TECHNICAL DRAWING

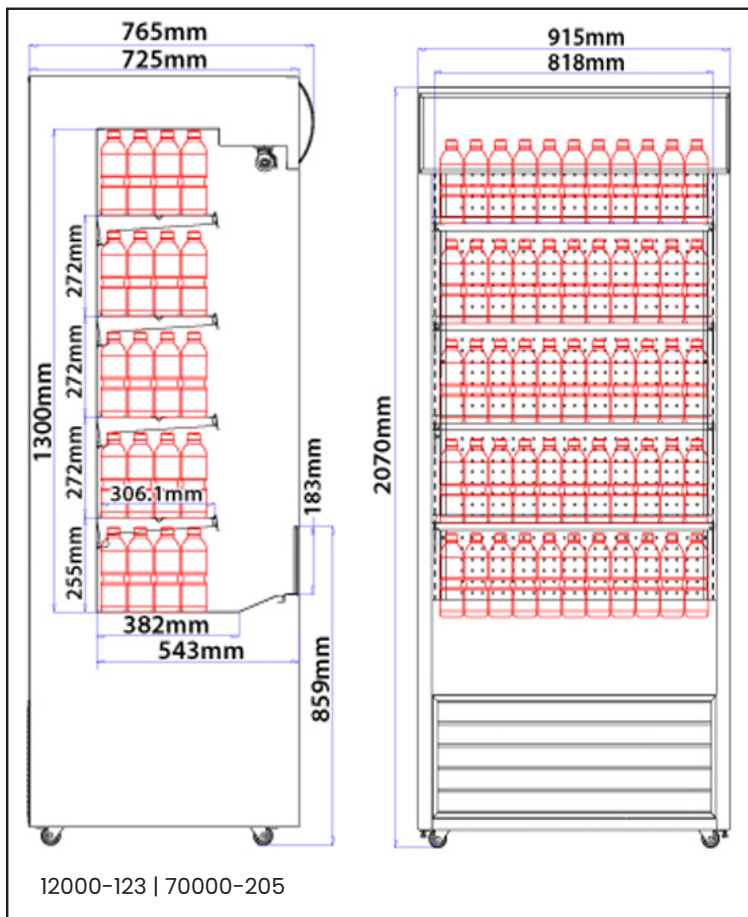

TECHNICAL SPECIFICATION

| | |
|------------------------|---|
| SKU | 70000-205 |
| Capacity | 530L 18.71 cu.ft. |
| Shelf Load Capacity | 55.1 lb. 25 kg. |
| Number of Shelves | 5 |
| Number of Casters | 4 |
| Power | 1700W |
| Amps | 16A |
| Electrical | 110V / 60Hz / 1Ph |
| Temperature Controller | Digital |
| Temperature Range | 2°C - 10°C 35.6°F - 50°F |
| Refrigerant | R290 |
| Type of Climate | 3 |
| Insulation Material | Cyclopentane |
| Defrosting | Automatic |
| Cooling System | Forced Air |
| Net Dimensions (WDH) | 36" x 30.1" x 81.5" 915 x 765 x 2070 mm |
| Net Weight | 335.1 lb. 152 kg. |
| Gross Dimensions (WDH) | 40" x 33.5" x 87.8" 1015 x 850 x 2230 mm |
| Gross Weight | 388 lb. 176 kg. |


**BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*



NEMA
6 - 15P
250VAC / 15 AMP



TECHNICAL DRAWING

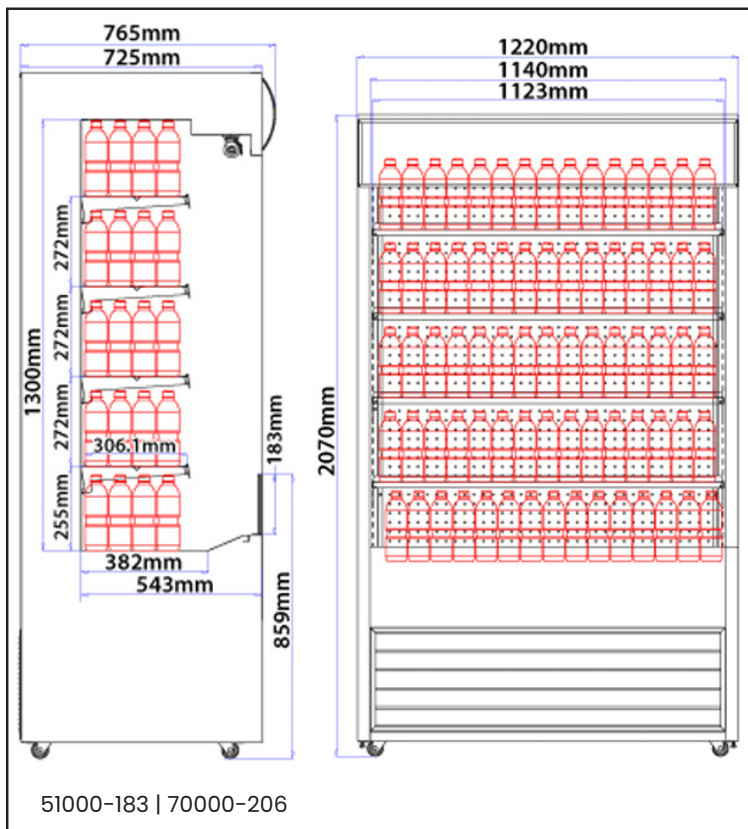

TECHNICAL SPECIFICATION

| | |
|------------------------|---|
| SKU | 70000-206 |
| Capacity | 700L 24.72 cu.ft. |
| Shelf Load Capacity | 66.1 lb. 30 kg. |
| Number of Shelves | 5 |
| Number of Casters | 4 |
| Power | 2550W |
| Amps | 12.1A |
| Electrical | 220V / 60Hz / 1Ph |
| Temperature Controller | Digital |
| Temperature Range | 2°C - 10°C 35.6°F - 50°F |
| Refrigerant | R290 |
| Type of Climate | 3 |
| Insulation Material | Cyclopentane |
| Defrosting | Automatic |
| Cooling System | Forced Air |
| Net Dimensions (WDH) | 48" x 30.1" x 81.5" 1220 x 765 x 2070 mm |
| Net Weight | 426.6 lb. 193.5 kg. |
| Gross Dimensions (WDH) | 52" x 33.5" x 87.8" 1320 x 850 x 2230 mm |
| Gross Weight | 486.1 lb. 220.5 kg. |


**BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*



NEMA
6 - 15P
250VAC / 15 AMP



TECHNICAL DRAWING

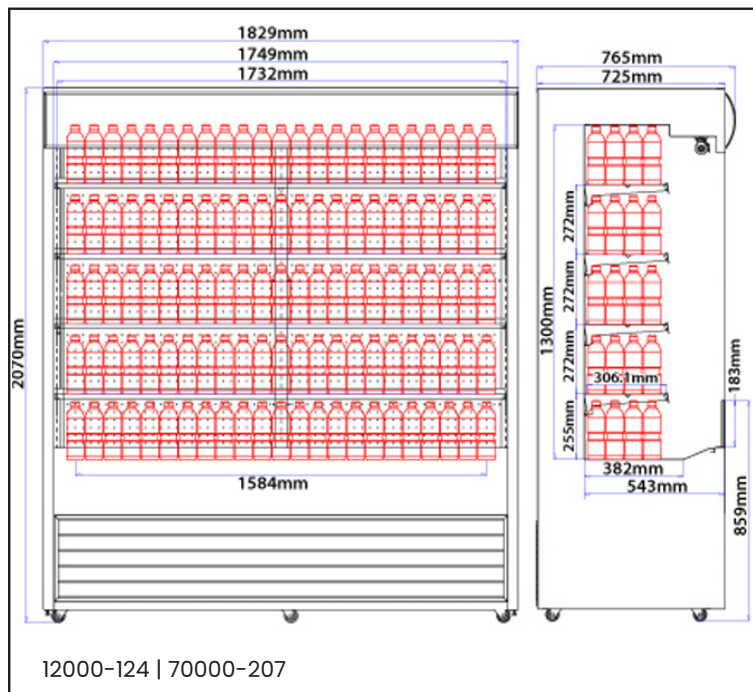

TECHNICAL SPECIFICATION

| | |
|------------------------|---|
| SKU | 70000-207 |
| Capacity | 1050L 37.08 cu.ft. |
| Shelf Load Capacity | 110.2 lb. 50 kg. |
| Number of Shelves | 5 |
| Number of Casters | 4 |
| Power | 2400W |
| Amps | 11.5A |
| Electrical | 220V / 60Hz / 1Ph |
| Temperature Controller | Digital |
| Temperature Range | 2°C - 10°C 35.6°F - 50°F |
| Refrigerant | R290 |
| Type of Climate | 3 |
| Insulation Material | Cyclopentane |
| Defrosting | Automatic |
| Cooling System | Forced Air |
| Net Dimensions (WDH) | 72" x 30.1" x 81.5" 1829 x 865 x 2070 mm |
| Net Weight | 565.5 lb. 256.5 kg. |
| Gross Dimensions (WDH) | 76" x 33.5" x 87.8" 1930 x 850 x 2230 mm |
| Gross Weight | 652.6 lb. 296 kg. |

**BMAD System (Low maintenance high performance). Dimensions rounded up to the nearest inch or millimeter. Specifications subject to change without notice.*



NEMA
6 - 15P
250VAC / 15 AMP

