


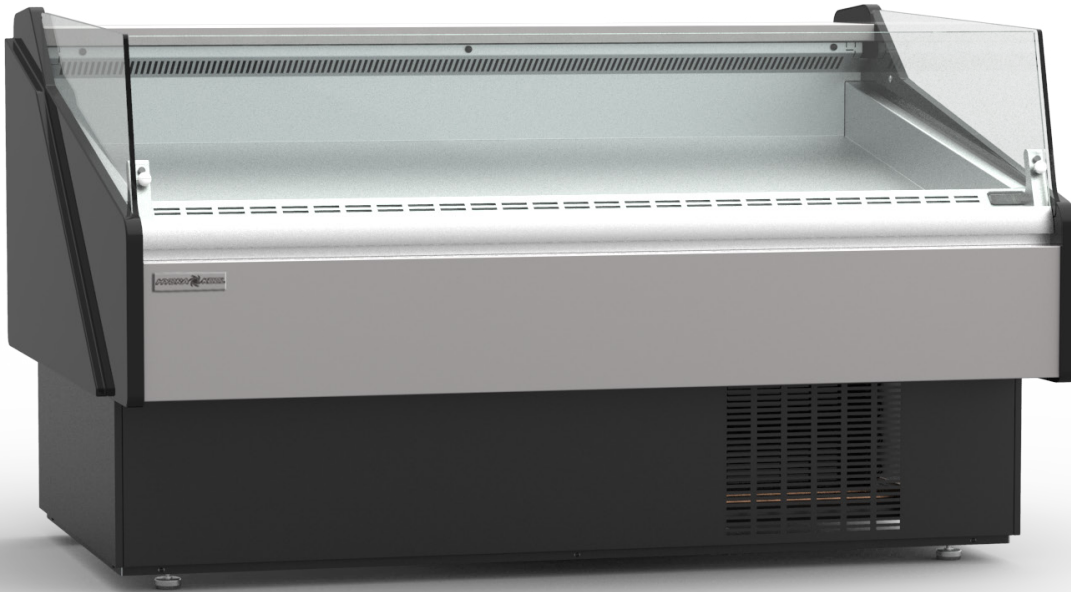

## MODELS

KFM-SO-(40, 50, 60, 80, 100, 120)-S

KFM-SO-(40, 50, 60, 80, 100, 120)-R

**OPEN FRONT SEAFOOD CASE  
DESIGNED FOR FRESH FISH**

CASE HOLDS 33°F TO 40°F • LOW VELOCITY FORCED AIR REFRIGERATION MAINTAIN HIGH HUMIDITY  
TEMPERED FRONT AND SIDE GLASS • CASES CAN BE MULTIPLEXED  
CAN BE USED WITH OPTIONAL ICE PANS • CASES REQUIRE FLOOR DRAINS



AUTODESK®  
REVIT®

| SELF CONTAINED | Model        | O.A.<br>Length<br>(inches) | Volume<br>FT³ | Electrical 115 Volts |            |       |                | NEMA<br>115 V<br>Plug | Weight lbs    |             | Crate Size (inches) |    |    |    |
|----------------|--------------|----------------------------|---------------|----------------------|------------|-------|----------------|-----------------------|---------------|-------------|---------------------|----|----|----|
|                |              |                            |               | Front                | Compressor |       | LIGHTS<br>Fans |                       | Total<br>Amps | No<br>Crate | With<br>Crate       | L" | W" | H" |
|                |              |                            |               |                      | H.P        | F.L.A |                |                       |               |             |                     |    |    |    |
|                | KFM-SO-40-S  | 40-3/8                     | 6.07          | 3/8                  | 8.4        | 0.65  | 9.05           | 5-15P                 | 284           | 445         | 48                  | 44 | 42 |    |
|                | KFM-SO-50-S  | 52-1/8                     | 8.00          | 1/2                  | 9.6        | 0.65  | 10.25          | 5-15P                 | 322           | 505         | 59                  | 44 | 42 |    |
|                | KFM-SO-60-S  | 60                         | 9.29          | 1/2                  | 9.6        | 0.75  | 10.35          | 5-15P                 | 366           | 564         | 67                  | 44 | 42 |    |
|                | KFM-SO-80-S  | 77-1/2                     | 12.15         | 5/8                  | 8.9        | 1.20  | 10.10          | 5-15P                 | 452           | 714         | 85                  | 44 | 42 |    |
|                | KFM-SO-100-S | 101-1/8                    | 16.00         | 3/4                  | 16         | 1.30  | 17.30          | N/A                   | 567           | 844         | 109                 | 44 | 42 |    |
|                | KFM-SO-120-S | 117                        | 18.58         | 3/4                  | 16         | 1.40  | 17.40          | N/A                   | 681           | 1053        | 124                 | 44 | 42 |    |

| OPTIONAL ICE / FISH PANS | Kit No | For Model            |
|--------------------------|--------|----------------------|
|                          | KT025A | KFM-SC/SF/SO-40-S/R  |
|                          | KT025B | KFM-SC/SF/SO-50-S/R  |
|                          | KT025C | KFM-SC/SF/SO-60-S/R  |
|                          | KT025D | KFM-SC/SF/SO-80-S/R  |
|                          | KT025E | KFM-SC/SF/SO-100-S/R |
|                          | KT025F | KFM-SC/SF/SO-120-S/R |

| REMOTE | Model        | O.A. Length (inches) | 115 Volts Total Amps | B.T.U | Weight lbs |            |
|--------|--------------|----------------------|----------------------|-------|------------|------------|
|        |              |                      |                      |       | No Crate   | With Crate |
|        | KFM-SO-40-R  | 40-3/8               | 0.2                  | 2548  | 229        | 390        |
|        | KFM-SO-50-R  | 52-1/8               | 0.2                  | 3015  | 267        | 450        |
|        | KFM-SO-60-R  | 60                   | 0.3                  | 3159  | 311        | 509        |
|        | KFM-SO-80-R  | 77-1/2               | 0.3                  | 4345  | 419        | 681        |
|        | KFM-SO-100-R | 101-1/8              | 0.4                  | 5112  | 511        | 789        |
|        | KFM-SO-120-R | 117                  | 0.5                  | 5472  | 615        | 988        |

## STANDARD FEATURES

- Coated evaporator coil
- Stainless steel frame
- Stainless steel interior
- Stainless steel rear work bench
- Silver colored PVC coated steel front panel
- CFC free injected foam insulation
- Black steel kick plate
- Foamed polystyrene black end panels
- Temperature and defrost regulated by a digital controller
- Slide out condensing unit on self-contained units
- Digital thermometer
- Levelling feet

## OPTIONAL FEATURES

- Ice/fish pan kit. See table above
- Stainless steel exterior
- Other colors available
- Joining Kit
- Partition
- Scale stand with receptacle
- Cutting board
- Knife Support
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

## WARRANTY

One year parts and labor with an additional four years on the compressor (part only)



Tel: 786.600.4687 / Toll Free: 844.218.8477


Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / toll free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com

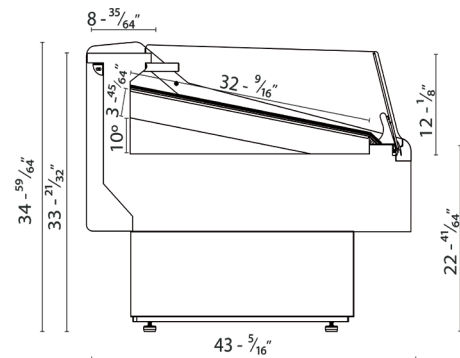

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

## NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U's are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. Remote cases must be hard wired – no plugs.



Hydra - Kool is a registered trademark of MVP Group Corp.  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE