



FROST TECH
REFRIGERATION LTD.



2021 CATALOGUE

www.frosttechrefrigeration.com

info@frosttechrefrigeration.com



FROST TECH
REFRIGERATION LTD.

Design | Quality | High-Efficiency | Customer Service



154 Norfinch Dr Units 5 - 6
North York, Ont, M3N 1X6



416-665-0095



877-265-0095



info@frosttechrefrigeration.com



@frosttechrefrigeration



@FrostTechRefrigeration



@FrostTechRefrigeration



@FrostTechRefrigeration

Visit us at:

www.frosttechrefrigeration.com



154 Norfinch Dr Units 5 - 6
North York, ON, M3N 1X6
Toll Free: 877-265-0095
www.frosttechrefrigeration.com



CONTENTS

- BAKERY / PASTRY DISPLAY CASES**
PAGE 3 — PAGE 31
- GELATO / ICE CREAM DISPLAY FREEZERS**
PAGE 33 — PAGE 50
- CHEESE / DELI / MEAT DISPLAY CASES**
PAGE 51 — PAGE 68
- FISH / SEAFOOD DISPLAY CASES**
PAGE 69 — PAGE 74
- HEATED DISPLAY CASES**
PAGE 75 — PAGE 80
- SALAD PREP DISPLAY CASE**
PAGE 81 — PAGE 84
- MULTI-DECK OPEN MERCHANDISERS**
PAGE 85 — PAGE 108

We are proud to let you know that we specialize in refrigerated products for bakeries, deli stores, supermarkets, gas stations, convenience stores, butcher shops, coffee shops, donut shops, restaurants and more.

WHAT CAN WE OFFER YOU...

Frost Tech Refrigeration Ltd offers highest quality of refrigerated / heated equipment and display cases for the food industry in North American market from new designs, high energy efficiency, and eco friendly. We at Frost Tech understand the importance in the value of quality products and customer service and we are happy to offer you both. The combination of using the latest technologies and focusing on high quality products will provide our customers with full satisfaction.

WHO WE ARE

Frost Tech Refrigeration came from a solid background of refrigeration services for all type of commercial refrigeration equipment.

We designed our refrigeration units according to our many years of experience, by understanding all clients demands. Our foundation as a service has driven us to achieve 100% customer satisfaction.

Frost Tech Refrigeration set out together to develop a business committed to the basic philosophy and desire to provide a quality product with exceptional attention to the needs of the customer.



BAKERY / PASTRY DISPLAY CASES

BL-WBD


NON REFRIGERATED - BAKERY / BREAD WALL DISPLAY UNIT

DESCRIPTION OF STANDARD UNIT:

- Construction of MDF
- LED Lighting
- 4 rows of powder-coated steel shelves: golden, silver or black
- Adjustable, highlighted shelves
- Yellow lighting
- Light platond
- Cupboard with sliding doors

OPTIONS:


- Mirrored back panel
- Wooden shelves
- Basket for BAKERY
- Granite top

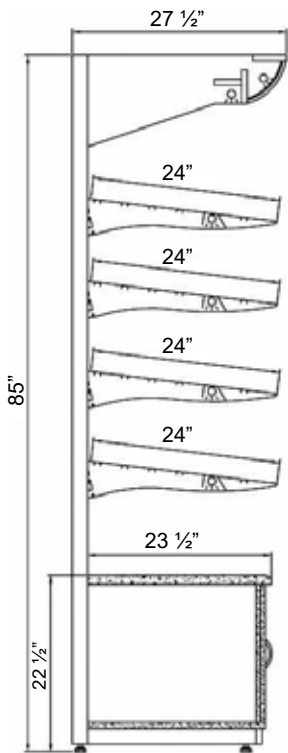


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
BL3-WBD	35 1/2"	27 1/2"	85"	198 / 90	115V / 60Hz / 1ph / 2 AMP
BL4-WBD	47"	27 1/2"	85"	242 / 110	115V / 60Hz / 1ph / 2 AMP



Wood Stains



Available Colors





BAKERY / PASTRY DISPLAY CASES

DC-WBD

NON REFRIGERATED - BAKERY / BREAD WALL DISPLAY UNIT

DESCRIPTION OF STANDARD UNIT:


- Construction of MDF
- LED Lighting
- 4 rows of powder-coated steel shelves: golden, silver or black
- Adjustable, highlighted shelves
- Yellow lighting
- Light plafond
- Cupboard with sliding doors

OPTIONS:

- Plexiglas Stoppers
- Granite top



SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
DC3-WBD	37 ¾"	32 ¾"	85"	287 / 130	115V / 60Hz / 1ph / 2 AMP
DC4-WBD	53 ½"	32 ¾"	85"	375 / 170	115V / 60Hz / 1ph / 2 AMP

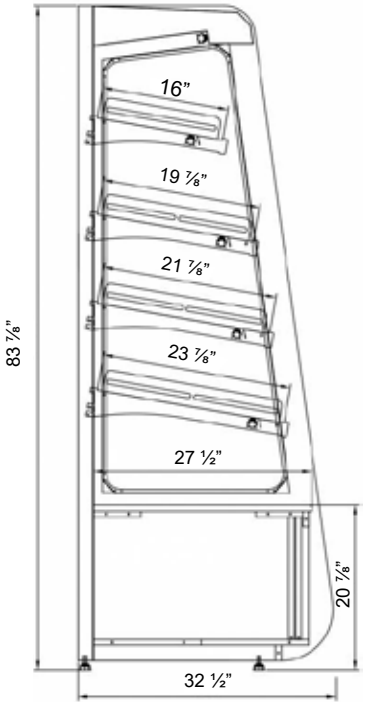


Profile Colors




RAL 9005
Jet Black

Granite Finishes



Nero Impala Roso Porino Strzegom

Available Colors



BAKERY / PASTRY DISPLAY CASES

CM-WRP
CURVED FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- 3 versions: Refrigerated (CM-R), Hot (CM-H), Dry (CM-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraphy (golden, silver or black)
- Finishes: golden, silver or black
- 3 rows of highlighted adjustable shelves: glass (CM-R, CM-D) or stainless steel (CM-H)
- Yellow lighting
- Sliding, double glass rear doors
- Forced cooling
- Temp. range* : 0 ÷ +4°C
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front glass secured by string cable
- Front opening glass
- Digital temperature control

OPTIONS:

- Version for chocolate & pralines
- Hot unit, Temp. range* : +40 ÷ +90°C
- Dry non refrigerated version (room temperature)
- For external condensing unit
- Wheels
- Ultrasonic humidifier
- Stainless steel worktop
- Color of your choice



SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
CM2-WRP	25 1/4"	33 1/2"	54"	385 / 175	115V / 60Hz / 1ph / 8 AMP
CM3-WRP	37 1/8"	33 1/2"	54"	577 / 262	115V / 60Hz / 1ph / 9.5 AMP
CM4-WRP	53"	33 1/2"	54"	661 / 350	115V / 60Hz / 1ph / 11.5 AMP




Profile Colors





Granite Finishes



Wood Stains



Available Colors

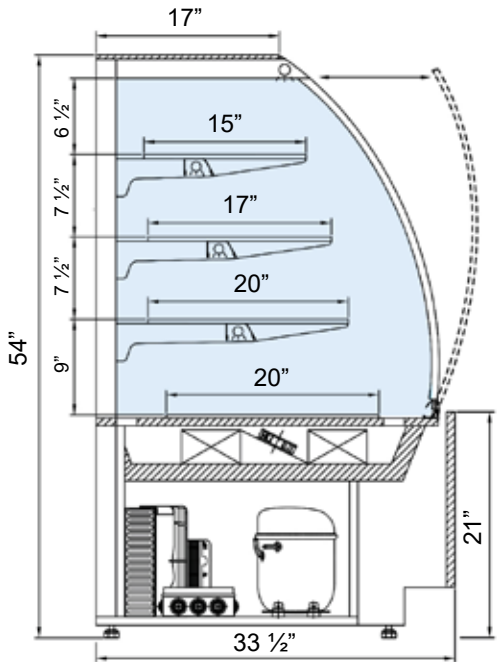

CM-WRP

BAKERY / PASTRY DISPLAY CASES

CMC90-IWRP


CURVED FRONT GLASS REFRIGERATED CORNER DISPLAY

DESCRIPTION OF STANDARD UNIT:

- 3 versions: Refrigerated (CM-R), Hot (CM-H), Dry (CM-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraphy (golden, silver or black)
- Finishes: golden, silver or black
- Yellow lighting
- Sliding, double glass rear doors
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front glass secured by string cable
- Front opening glass
- Digital temperature control

OPTIONS:


- Version for chocolate & pralines
- Hot unit, Temp. range* : +40 ÷ +90°C
- Dry non refrigerated version (room temperature)
- For external condensing unit
- Wheels
- Ultrasonic humidifier
- Stainless steel worktop
- Color of your choice

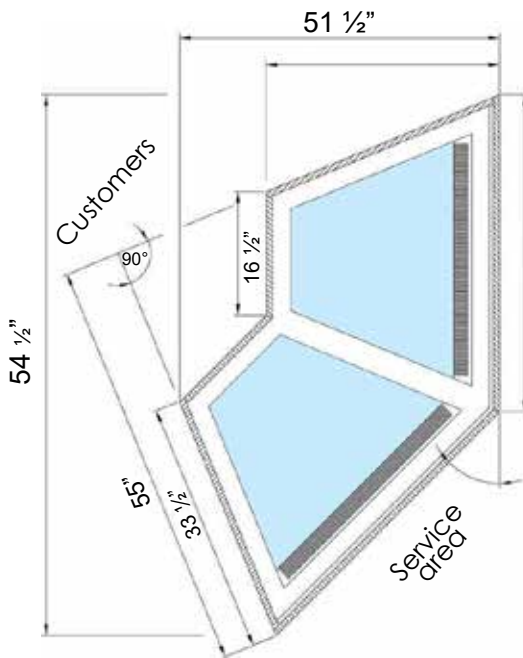

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
CMC90-IWRP	52 1/2"	33 1/2"	54"	573 / 260	115V / 60Hz / 1ph 11.5 AMP




Profile Colors



Granite Finishes



Wood Stains



Available Colors



BAKERY / PASTRY DISPLAY CASES

CMC90-OWRP

CURVED FRONT GLASS REFRIGERATED CORNER DISPLAY

DESCRIPTION OF STANDARD UNIT:


- 3 versions: Refrigerated (CM-R), Hot (CM-H), Dry (CM-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraphy (golden, silver or black)
- Finishes: golden, silver or black
- Yellow lighting
- Sliding, double glass rear doors
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front glass secured by string cable
- Front opening glass
- Digital temperature control

OPTIONS:


- Version for chocolate & pralines
- Hot unit, Temp. range* : +40 ÷ +90°C
- Dry non refrigerated version (room temperature)
- For external condensing unit
- Wheels
- Ultrasonic humidifier
- Stainless steel worktop
- Color of your choice



SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
CMC90-OWRP	56"	33 1/2"	54"	776 / 351	115V / 60Hz / 1ph 11.5 AMP

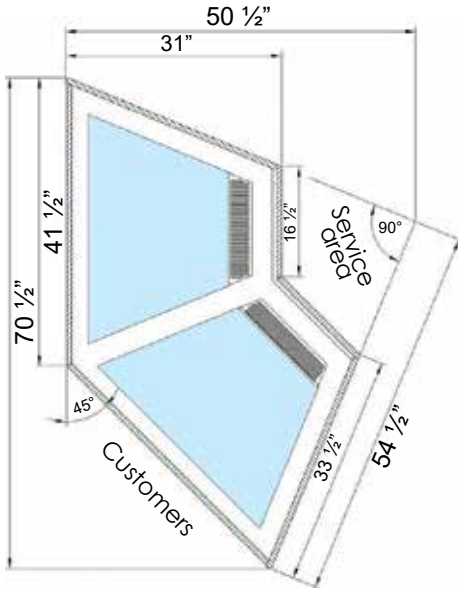


Profile Colors



Granite Finishes



Wood Stains



Available Colors



BAKERY / PASTRY DISPLAY CASES

RF-WRP

STRAIGHT FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- 3 versions: Refrigerated (RF-R), Hot (RF-H) Dry (RF-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraph (golden, silver or black)
- Finishes: golden, silver or black
- 3 rows of highlighted adjustable shelves: glass (RF-R, RF-D) or stainless steel (RF-H)
- Sliding, double glass rear doors (except RF2 - hinged glass doors)
- Forced cooling
- Temp. range* for RF-R: 0 ÷ +4°C
- Temp. range* for RF-H: +40 ÷ +90°C
- Dry non refrigerated RF-D: (room temperature).
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Front glass secured by string cable
- Digital temperature control




OPTIONS:

- Version for chocolate & pralines
- For external condensing unit
- Wheels
- Ultrasonic humidifier (except RF 2)
- Stainless steel worktop

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
RF2-WRP	25 1/4"	33 3/4"	54"	286 / 130	115V / 60Hz / 1ph / 8 AMP
RF3-WRP	37"	33 3/4"	54"	418 / 190	115V / 60Hz / 1ph / 9.5 AMP
RF4-WRP	51 1/4"	33 3/4"	54"	529 / 240	115V / 60Hz / 1ph / 11.5 AMP

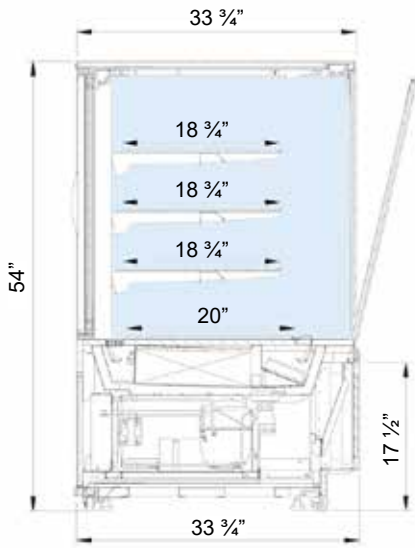


Profile Colors




Granite Finishes



Wood Stains



Available Colors



BAKERY / PASTRY DISPLAY CASES

RF-2SWRP

LOW PROFILE - WITH 2 SHELVES
STRAIGHT FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- 3 versions: Refrigerated (RF-R), Hot (RF-H) Dry (RF-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraph (golden, silver or black)
- Finishes: golden, silver or black
- 2 rows of highlighted adjustable shelves: glass (RF-R, RF-D) or stainless steel (RF-H)
- Sliding, double glass rear doors (except RF2 - hinged glass doors)
- Forced cooling
- Temp. range* for RF-R: 0 ÷ +4°C
- Temp. range* for RF-H: +40 ÷ +90°C
- Dry non refrigerated RF-D: (room temperature).
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Front glass secured by string cable
- Digital temperature control




OPTIONS:

- Version for chocolate & pralines
- For external condensing unit
- Wheels
- Ultrasonic humidifier (except RF 2)
- Stainless steel worktop

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
RF2-2SWRP	25 1/4"	33 3/4"	46"	253 / 115	115V / 60Hz / 1ph / 8 AMP
RF3-2SWRP	37"	33 3/4"	46"	374 / 170	115V / 60Hz / 1ph / 9.5 AMP
RF4-2SWRP	51 1/4"	33 3/4"	46"	485 / 220	115V / 60Hz / 1ph / 11.5 AMP

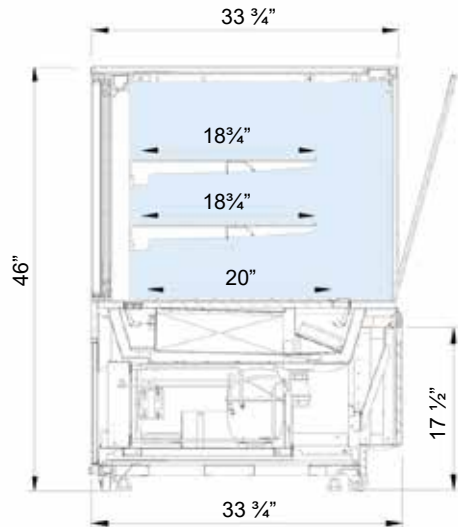


Profile Colors




Granite Finishes



Wood Stains



Available Colors







RFC-WRP



BAKERY / PASTRY DISPLAY CASES

RFC-WRP
STRAIGHT FRONT GLASS REFRIGERATED CORNER DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Refrigerated unit
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraph (silver or black)
- Finishes: silver or black
- 3 rows of highlighted adjustable shelves: glass (RF-R, RF-D) or stainless steel (RF-H)
- Hinged glass back door
- Forced cooling
- Temp. range* for RF-R: 0 ÷ +4°C
- Dry non refrigerated RF-D: (room temperature).
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Front glass secured by string cable
- Digital temperature control



OPTIONS:

- Version for chocolate & pralines
- For external condensing unit
- Wheels
- Ultrasonic humidifier (except RF 2)
- Stainless steel worktop


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
RFC-WRP	50"	33 3/4"	54"	815 / 370	115V / 60Hz / 1ph / 11.5 AMP

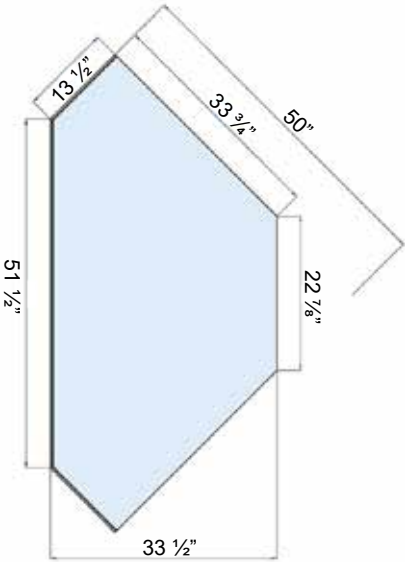


Profile Colors



Granite Finishes



Wood Stains



Available Colors



BAKERY / PASTRY DISPLAY CASES

DC-WRP

ANGLED FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder coated steel
- LED Lighting.
- Wooden casing
- Side and front glasses double with black serigraphy
- Finishes: golden, silver or black
- 3 rows of highlighted adjustable, glass shelves
- Yellow lighting
- Sliding, double glass rear doors
- Forced cooling
- Temp. range: 0 ÷ +4 °C
- Automatic water Evaporation
- Hygrostat (humidity reduction
- Front opening glass
- Condenser maintenance-free
- Front glass secured by string cable
- Digital temperature control

OPTIONS:

- Version for chocolate & pralines
- For external condensing unit.
- Wheels.
- Ultrasonic humidifier.
- Stainless steel worktop
- Thermometer in the lamp
- Multiplexing

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
DC3-WRP	37 ¾"	38"	55"	441 / 200	115V / 60Hz / 1ph / 8 AMP
DC4-WRP	53 ¾"	38"	55"	551 / 250	115V / 60Hz / 1ph / 11 AMP



Profile Colors



RAL 9005
Jet Black

Granite Finishes



Nero



Impala





Roso
Porino



Strzegom

Available Colors

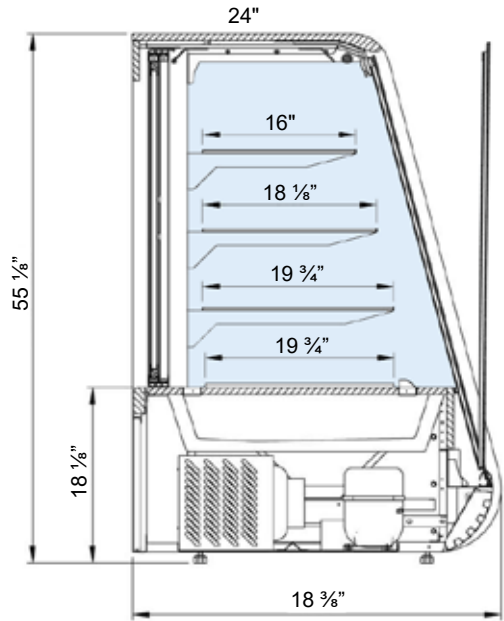

DC-WRP



MG-RP

BAKERY / PASTRY DISPLAY CASES

MG-RP


STRAIGHT FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: Refrigerated (MG-R), Dry (MG-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Front, side and top glasses: single, with serigraphy (silver or black)
- Lift up system of front glass
- 3 rows of highlighted adjustable, glass shelves
- Yellow lighting
- Bottom decks on tray slides
- Sliding, double glass rear doors
- Wheels
- Forced cooling
- Temp. range* : 0 ÷ +4 °C
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Digital temperature control

OPTIONS:


- Version for chocolate & pralines
- For external condensing unit
- Ultrasonic humidifier
- External condensing unit
- Dry non refrigerated version MG-DP: (room temperature)

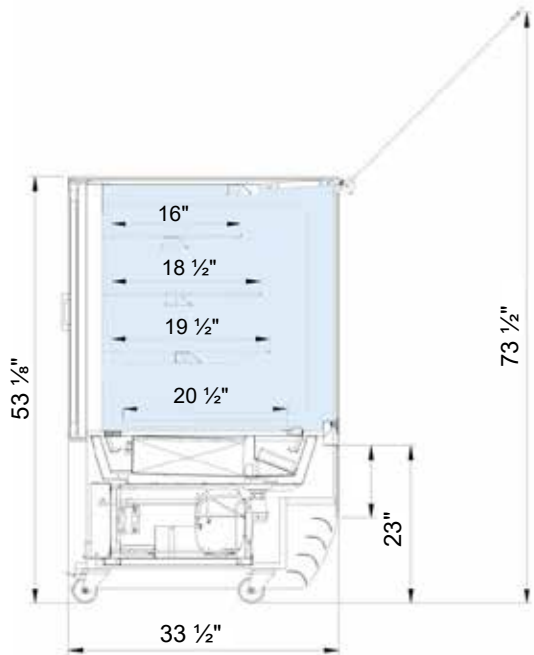


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MG3-RP	37"	33 1/2"	53 1/8"	397 / 180	115V / 60Hz / 1ph / 9.5 AMP
MG4-RP	56 1/2"	33 1/2"	53 1/8"	618 / 280	115V / 60Hz / 1ph / 11.5 AMP




Profile Colors



Granite Finishes



Wood Stains



Available Colors



BAKERY / PASTRY DISPLAY CASES

CP-WRP
STRAIGHT FRONT GLASS REFRIGERATED DISPLAY CASE


DESCRIPTION OF STANDARD UNIT:

- 3 versions: Refrigerated, Hot, and Dry
- LED lighting
- Construction of powder coated steel
- Tempered, flat front and side glasses
- Yellow lighting
- Stainless steel exposition trays and worktop
- Rear Plexiglas's shutter
- Forced cooling
- Temp. range* : 0 ÷ +4°C
- Dry non refrigerated CP-DP: (room temperature)
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Digital temperature control

OPTIONS:

- CLASSIC casing (CLA) – straight front and sides (in RAL or wooden stain)
- RETRO casing (RET) – milled front and sides (only in RAL)
- MODERN casing (MOD) – SIBU front with LED lighting
- Version for chocolate, pralines & gelato
- For external condensing unit (AZ)**
- Wheels
- Multiplexing
- Glass shelf
- Plexiglas separator
- 2-steps exposition trays for cakes
- Grate for bread with crumb's tray
- Bakery trays
- Stand for scale, cash register
- Heated lamps for hot version
- Stainless steel bumper
- Stainless steel shelf for customers
- Granite worktop


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
CP2-WRP	25 ¼"	35 ½"	47 ¼"	286 / 130	115V / 60Hz / 1ph / 8 AMP
CP3-WRP	37"		47 ¼"	418 / 190	115V / 60Hz / 1ph / 9.5 AMP
CP4-WRP	53"		47 ¼"	529 / 240	115V / 60Hz / 1ph / 11.5 AMP

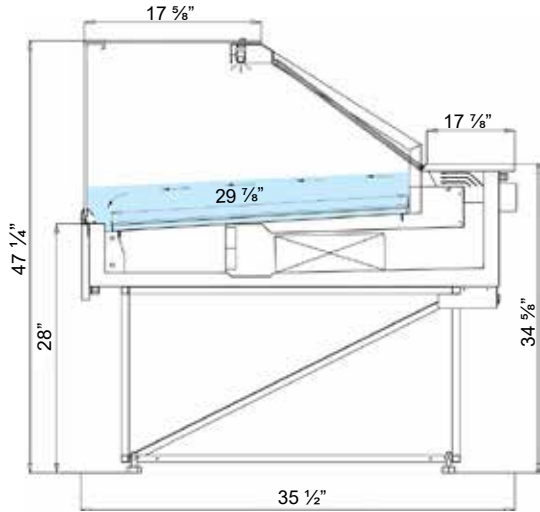


Profile Colors




Granite Finishes



Wood Stains



Available Colors



CP-WRP

BAKERY / PASTRY DISPLAY CASES

LM-WRP

STRAIGHT FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- 2 versions: Refrigerated (RF-R), Dry (RF-D)
- LED lighting
- Construction of stainless steel
- External casing made of laminate chipboard
- Highlighted adjustable glass shelves (LED)
- Sliding rear doors (except RF2 - hinged glass doors)
- Forced cooling
- Temp. range* for RF-R: 0 ÷ +4°C
- Dry non refrigerated RF-D: (room temperature).
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Front glass secured by string cable
- Digital temperature control

OPTIONS:

- Multiplexing
- For individual decoration
- Highlighted front panel
- Wheels




SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
LM2-WRP	26 ¾"	32 ½"	53"	286 / 130	115V / 60Hz / 1ph / 8 AMP
LM3-WRP	38 ½"	32 ½"	53"	418 / 190	115V / 60Hz / 1ph / 9.5 AMP
LM4-WRP	54 ¼"	32 ½"	53"	529 / 240	115V / 60Hz / 1ph / 11.5 AMP

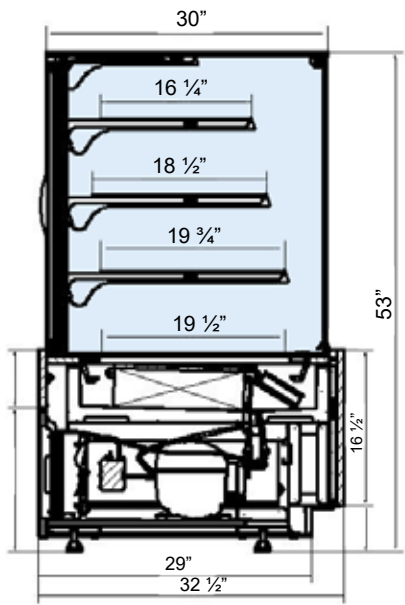


LM-WRP




Profile Colors



Granite Finishes



Wood Stains



Available Colors





BAKERY / PASTRY DISPLAY CASES

VN-RP

CURVED FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Construction and casing of stainless steel
- LED lighting
- Side glasses: double with silver serigraphy
- Front glass in closed version: double with silver serigraphy
- 3 rows of highlighted, adjustable shelves: glass
- (VN-R, VN-D) or stainless steel (VN-H)
- Yellow lighting
- Perforated, stainless steel back panel in self-service (O) version
- Sliding, double glass rear doors (except VN 60 - hinged glass doors)
- Forced cooling
- Temp. range* for VN-R: 0 ÷ +4°C
- Temp. range* for VN-O: 0 ÷ +4°C
- Temp. range* for VN-H: +40 ÷ +90°C
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Digital temperature control




OPTIONS:

- Version for chocolate & pralines
- For external condensing unit
- Wheels
- Ultrasonic humidifier (except VN 2)
- Front glass secured by the chain
- MDF front panel and sides
- Rear, hinged Plexiglas doors for self-service version


SPECIFICATIONS – Closed Front					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
VN2-RP	24"	31 ½"	53 ½"	309 / 140	115V / 60Hz / 1ph / 8 AMP
VN3-RP	35 ½"	31 ½"	53 ½"	375 / 170	115V / 60Hz / 1ph / 9.5 AMP
VN4-RP	47"	31 ½"	53 ½"	463 / 210	115V / 60Hz / 1ph / 11.5 AMP

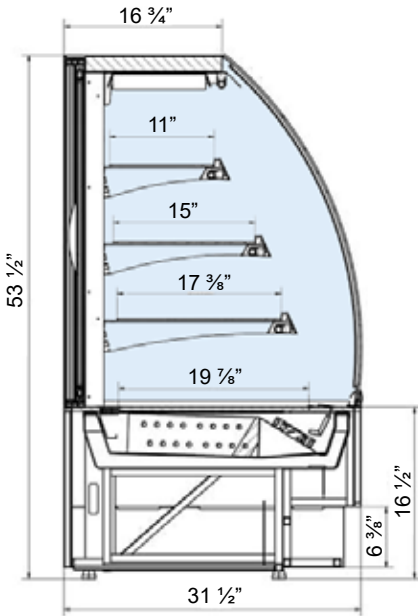

Profile Colors




Granite Finishes



Wood Stains



Available Colors





www.frosttechrefrigeration.com

info@frosttechrefrigeration.com

BAKERY & PASTRY SHOPS



CASH-OUT COUNTER

CM-COC

NON-REFRIGERATED CHECK-OUT CASH COUNTER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder coated steel
- LED lighting
- Wooden casing
- Finishes: golden, silver or black
- Yellow lighting
- Temp. range : (room temperature)
- Bottom storage area


OPTIONS:

- Colors of choice
- Granite top

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
CM3-COC	37"	33 ½"	35"	133 / 60	115V / 60Hz / 1ph / 1 AMP
CM4-COC	52 ⅞"	33 ½"	35"	199 / 90	115V / 60Hz / 1ph / 1 AMP



MATCHING - CM - MODEL

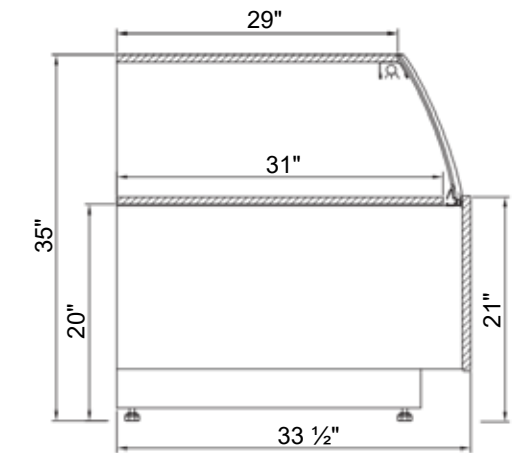

CASH-OUT COUNTER

RF-COC

NON-REFRIGERATED CHECK-OUT CASH COUNTER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder coated steel
- LED market lighting
- Wooden casing
- Finishes: silver or black
- Temp. range : (room temperature)
- Bottom storage area

OPTIONS:


- Colors of choice
- Granite top

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
RF3-COC	37"	33 ½"	35"	60 / 133	115V / 60Hz / 1ph / 1 AMP
RF4-COC	48"	33 ½"	35"	90 / 199	115V / 60Hz / 1ph / 1 AMP


Custom Length Available




MATCHING - RF - MODEL

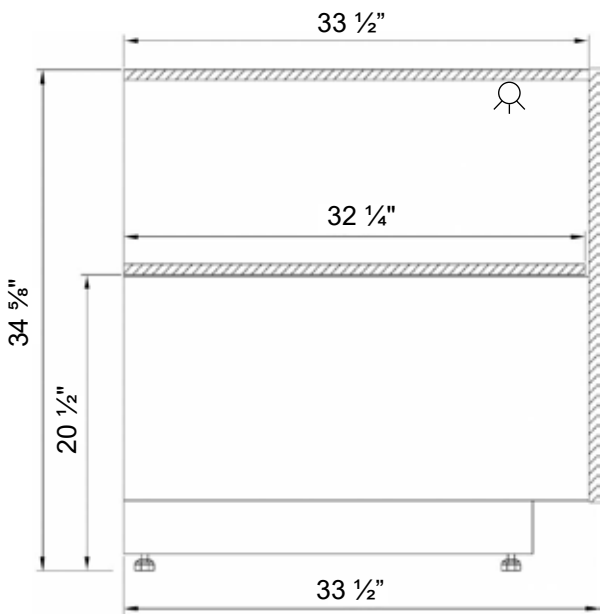

Profile Colors




Available Colors




Granite Finishes



Wood Stains



Profile Colors




Available Colors



Granite Finishes



Wood Stains



CASH-OUT COUNTER

MG-COC

NON-REFRIGERATED CHECK-OUT CASH COUNTER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder coated steel
- Wooden casing
- Finishes: golden, silver or black
- Temp. range : (room temperature)
- Bottom storage area


OPTIONS:

- Colors of choice
- Granite top

SPECIFICATIONS				
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)
MG3-COC	37"	32 ½"	34 ⅝"	60 / 133
MG4-COC	48 ⅞"	32 ½"	34 ⅝"	90 / 199



MATCHING - MG - MODEL

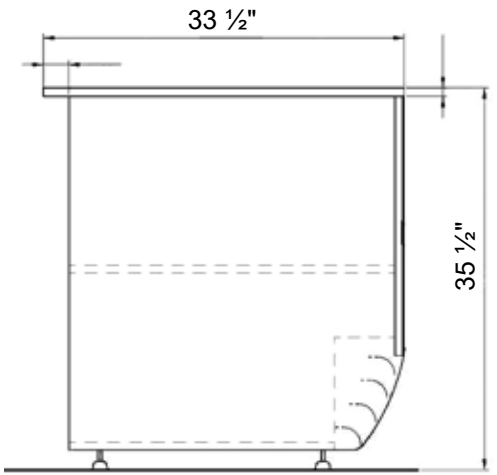

CASH-OUT COUNTER

DC-COC

NON-REFRIGERATED CHECK-OUT CASH COUNTER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder coated steel
- Front display
- Front opening
- LED lighting
- Wooden casing
- Finishes: golden, silver or black
- Temp. range : (room temperature)
- Bottom storage area
- Sliding middle shelf


OPTIONS:

- Colors of choice
- Granite top


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
DC3-COC	35 ½"	31" ⅞ / 38"	35"	133 / 60	115V / 60Hz / 1ph / 1 AMP
DC4-COC	48 ⅞"	31" ⅞ / 38"	35"	199 / 90	115V / 60Hz / 1ph / 1 AMP



MATCHING - DC - MODEL

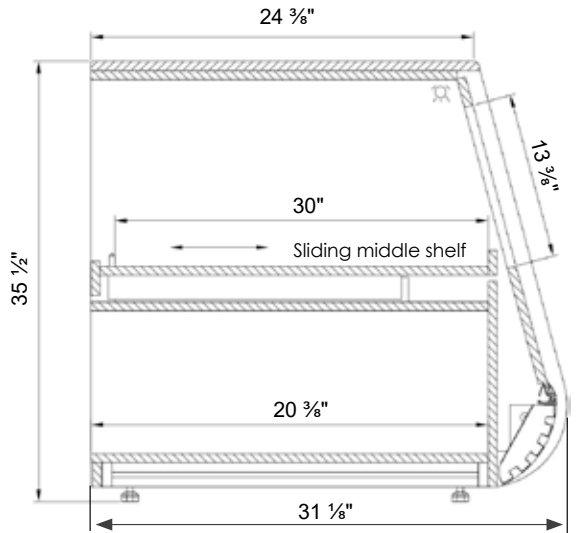


Profile Colors



Granite Finishes



Wood Stains



Available Colors




Profile Colors



Granite Finishes



Wood Stains



Available Colors



REFRIGERATED CASH-OUT COUNTER

PL-RCC


REFRIGERATED CASH COUNTER

DESCRIPTION OF STANDARD UNIT:


- Construction of powder coated steel
- LED lighting
- Stainless steel exposition drawer
- Wooden casing
- Forced cooling
- Temp. range* : 0 ÷ +4°C
- Automatic water Evaporation
- Front glass secured by string cable
- Front opening glass
- Digital temperature control

OPTIONS:


- Color of your choice
- Wheels
- Ultrasonic humidifier

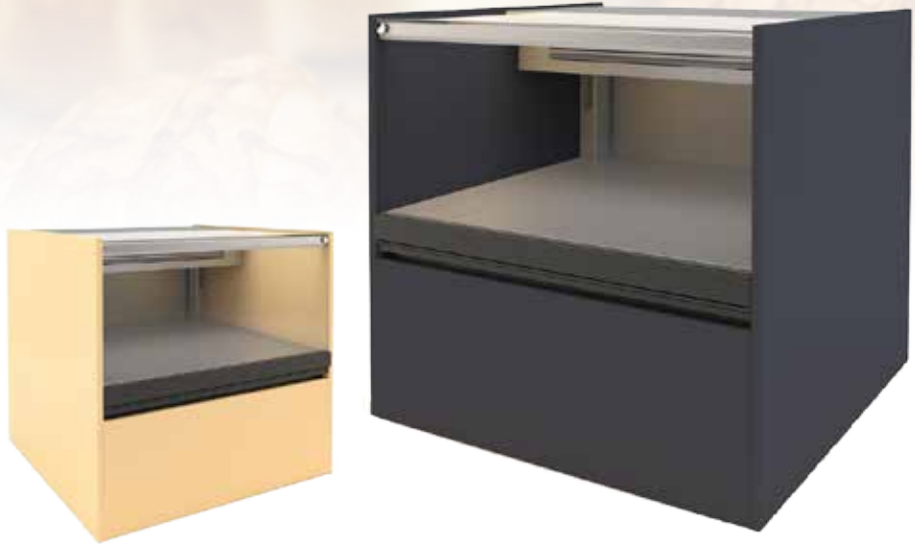


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
PL1-RCC	35 ½"	35 ½"	35 ½"	176 / 80	115V / 60Hz / 1ph / 6 AMP
PL2-RDD	39 ½"	35 ½"	35 ½"	242 / 110	115V / 60Hz / 1ph / 7 AMP

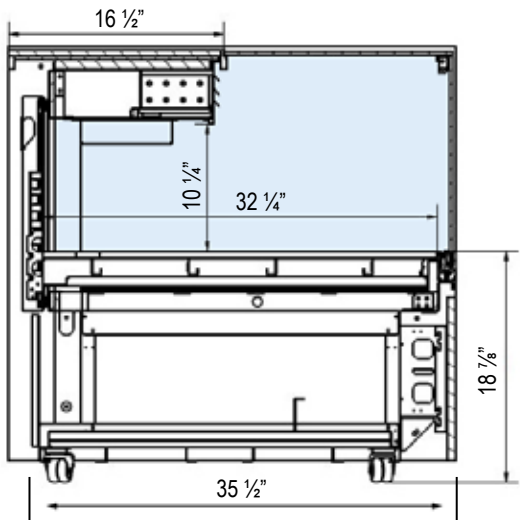


Profile Colors



Granite Finishes



Wood Stains



Available Colors



PL-RCC

GELATO DISPLAY CASE

ML-IGF
POZZETTI - GELATO / ICE-CREAM DISPLAY FREEZER

DESCRIPTION OF STANDARD UNIT:


- Gravity cooling
- Finishing elements of stainless steel
- Device adapted for furniture installation (assembly on a worktop)
- Stainless steel worktop
- White lighting
- Gelato pans
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- Wheels
- Spoon washer
- For individual decoration
- Glass extension



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
ML4-IGF	30 1/2"	29 3/4"	45 1/4"	4	286 / 130	115V / 60Hz / 1ph / 11 AMP 220V / 60Hz / 1ph / 7 AMP
ML6-IGF	39 3/4"	29 3/4"	45 1/4"	6	353 / 160	115V / 60Hz / 1ph / 13.5 AMP 220V / 60Hz / 1ph / 9 AMP
ML8-IGF	49 1/4"	29 3/4"	45 1/4"	8	419 / 190	115V / 60Hz / 1ph / 13.5 AMP 220V / 60Hz / 1ph / 9 AMP

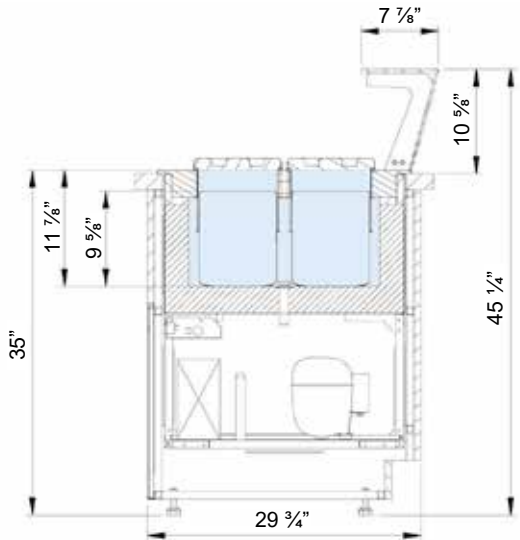

Available Colors



GELATO DISPLAY CASE

CN-GF
HORIZONTAL GLASS TOP GELATO DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:



- Forced cooling
- Construction of stainless steel, casing of ABS plate
- LED Lighting
- Lift up system of horizontal glass
- Stainless steel worktop
- Wheels and adjustable feet
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Digital temperature control

OPTIONS:


- Spoon washer
- For individual decoration




SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
CN9-GF	85 1/4"	32"	36"	9	441 / 200	115V / 60Hz / 1ph 13.5 AMP

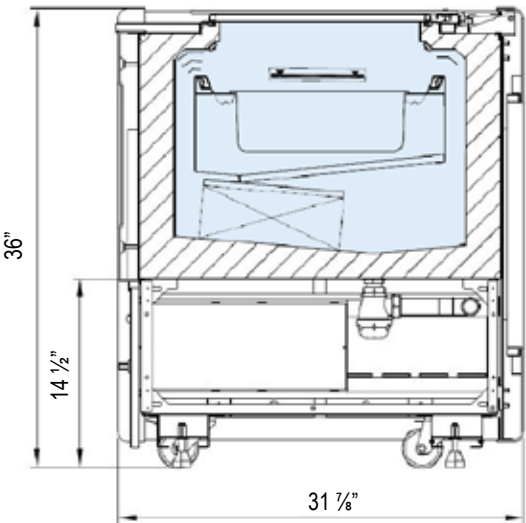

Wood Stains



Available Colors



GELATO DISPLAY CASE

CR-GF
CURVED FRONT GLASS GELATO DISPLAY


DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- Front panel made of powder-coated steel - highlighted
- (blue lighting for RAL 9006,white lighting for rest colors)
- MDF sides
- Side glasses with heaters
- Stainless steel worktop
- Plexiglas night curtain
- White lighting
- Gelato pans
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Front opening glass
- Digital temperature control


OPTIONS:

- Wheels
- Spoon washer
- For individual decoration
- Wooden casing
- Squar front glass, model (CRS-GF)



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
CR7-GF	41 ¾"	34"	51 ⅞"	7	353 / 160	115V / 60Hz / 1ph / 11 AMP
CR10-GF	55 ⅞"	34"	51 ⅞"	10	419 / 190	115V / 60Hz / 1ph / 13.5 AMP

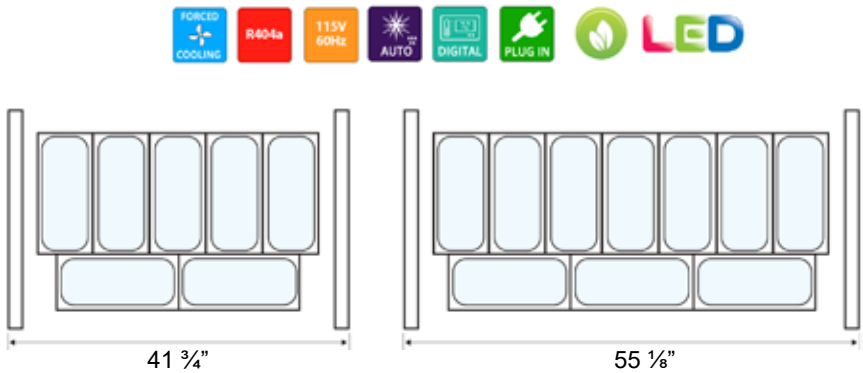

Wood Stains



Available Colors

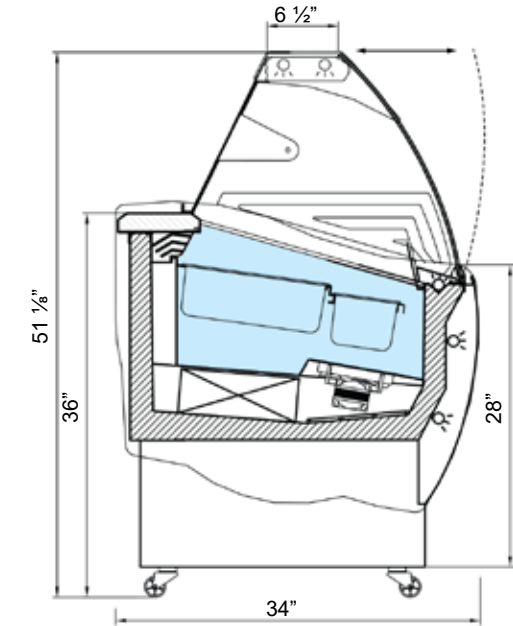

GELATO DISPLAY CASE

CRS-GF
SQUARE FRONT GLASS GELATO DISPLAY


DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- Front panel made of powder-coated steel - highlighted
- (blue lighting for RAL 9006,white lighting for rest colors)
- MDF sides
- Side glasses with heaters
- Stainless steel worktop
- Plexiglas night curtain
- White lighting
- Gelato pans
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Front opening glass
- Digital temperature control


OPTIONS:

- Wheels
- Spoon washer
- For individual decoration
- Wooden casing


SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
CRS7-GF	40 ¾"	36 ½"	48 ⅞"	7	353 / 160	115V / 60Hz / 1ph / 11 AMP
CRS10-GF	54 ⅞"	36 ½"	48 ⅞"	10	419 / 190	115V / 60Hz / 1ph / 13.5 AMP

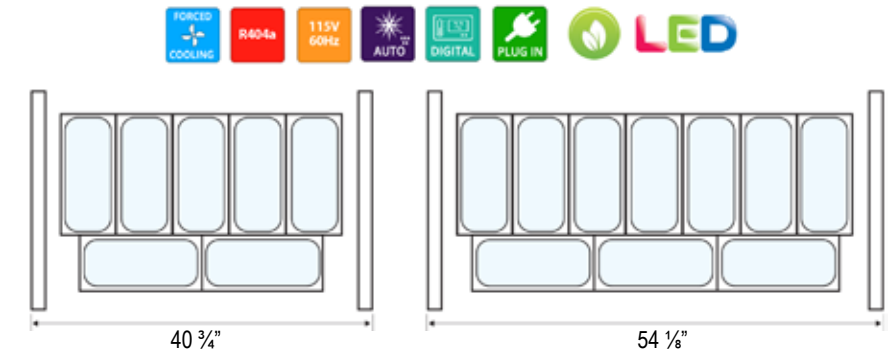

Wood Stains



Available Colors

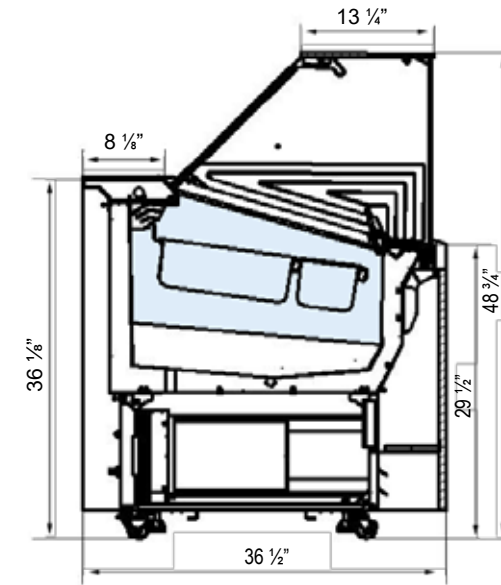

* Temperature range given for max ambient temp of +30°C and relative humidity of 55%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (Hawana W); 350W/1mr at evaporating temp. -25°C



GELATO DISPLAY CASE

BS-GF


CURVED FRONT GLASS GELATO DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED Lighting
- MDF front panel and sides
- Front and side glasses with heaters
- Side and front glasses with silver serigraphy
- Silver finishes
- Stainless steel worktop
- Night blind
- White lighting
- Wheels
- Forced cooling
- Temp. range*: $-12 \div -24^{\circ}\text{C}$
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Lift up system of front glass
- Digital temperature control

OPTIONS:

- Spoon washer
- For individual decoration
- Wooden casing
- Highlighted Plexiglas front
- Water cooled condenser

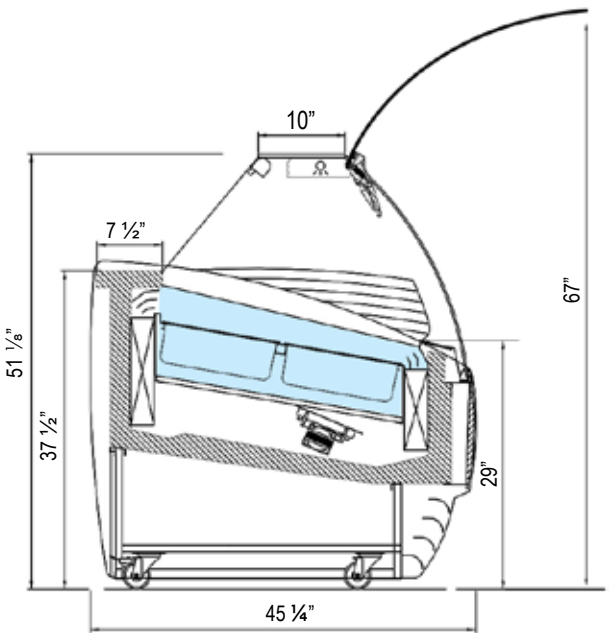

SPECIFICATIONS


MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
BS12-GF	45 1/2"	45 1/4"	51 1/8"	12	441 / 200	220V / 60Hz / 1ph 8 AMP
BS18-GF	65 1/4"	45 1/4"	51 1/8"	18	617 / 280	220V / 60Hz / 1ph 12 AMP
BS24-GF	85"	45 1/4"	51 1/8"	24	728 / 330	220V / 60Hz / 1ph 14 AMP




Wood Stains



Available Colors



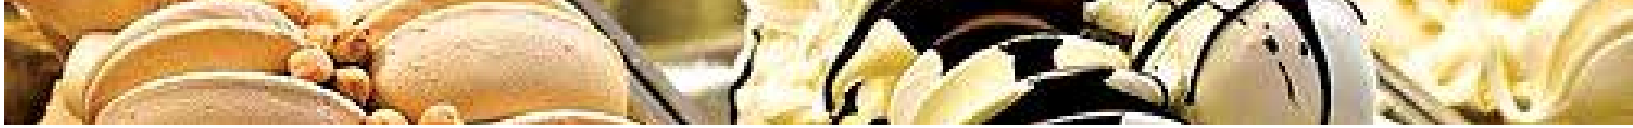

GELATO DISPLAY CASE

TF-IGF

CURVED FRONT GLASS GELATO / ICE CREAM DISPLAY FREEZER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- Front made of powder-coated steel
- MDF sides
- Side and front glasses with silver serigraphy
- Stainless steel worktop
- Plexiglas night curtain
- White LED lighting
- Space for additional ice-cream containers (under exposition)
- Wheels
- Gravity cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Gelato pans
- Digital temperature control

OPTIONS:

- Spoon washer
- Version for external condensing unit.
- Ice Cream Dipping inserts




SPECIFICATIONS


MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS (Gelato)	NUMBERS OF Buckets (Ice-Cream)	WEIGHT (LBS / KG)	ELECTRICAL
TF7-IGF	39 1/8"	35 3/4"	49 1/8"	7	6	308 / 140	115V / 60Hz / 1ph 7 AMP
TF9-IGF	49 1/8"	35 3/4"	49 1/8"	9	6	352 / 160	115V / 60Hz / 1ph 13.5 AMP
TF10-IGF	52 1/8"	35 3/4"	49 1/8"	10	8	396 / 180	115V / 60Hz / 1ph 13.5 AMP
TF13-IGF	65 1/8"	35 3/4"	49 1/8"	13	10	440 / 200	115V / 60Hz / 1ph 15.5 AMP




TF10-IGF

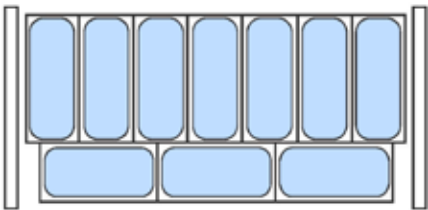


10 - GELATO PANS

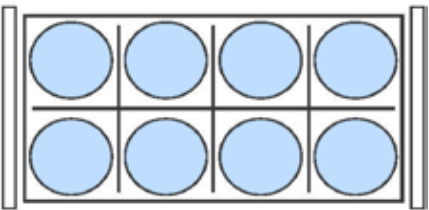

8 - ICE-CREAM BUCKETS

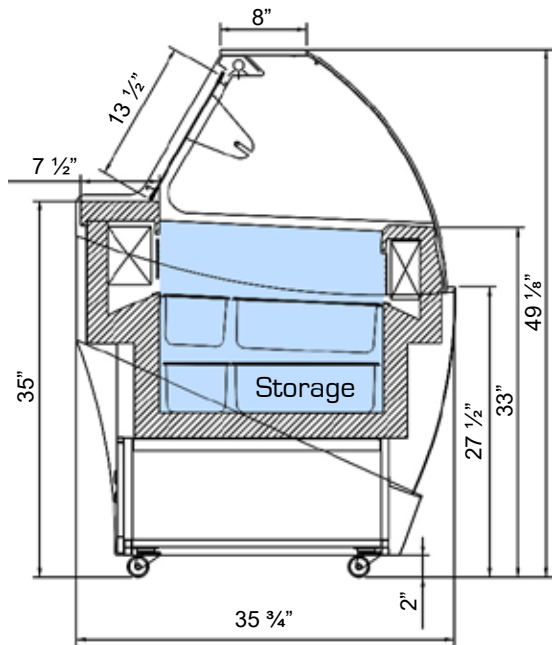

Available Colors





GELATO DISPLAY CASE

DC-GF


ANGLED FRONT GLASS GELATO DISPLAY FREEZER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- MDF front panel and top worktop
- Front glasses with black serigraphy
- Stainless steel worktop
- Night blind
- White lighting
- Wheels
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Front opening glass
- Digital temperature control

OPTIONS:

- Spoon washer
- For individual decoration
- Wooden casing
- Water cooled condenser




SPECIFICATIONS


MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
DC12-GF	46 1/2"	48 3/4"	55"	12	595 / 270	220V / 60Hz / 1ph 7 AMP
DC18-GF	66 1/8"	48 3/4"	55"	18	727 / 330	220V / 60Hz / 1ph 9 AMP
DC24-GF	85 3/4"	48 3/4"	55"	24	859 / 390	220V / 60Hz / 1ph 11 AMP



* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
 ** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

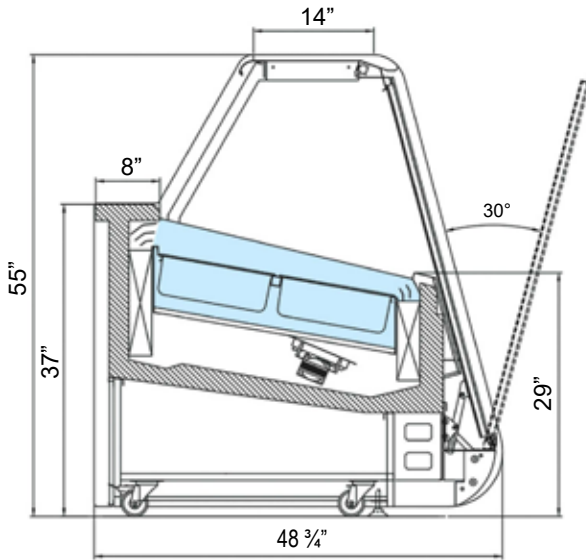

Available Colors



GELATO DISPLAY CASE

SR-GF
CURVED FRONT GLASS GELATO DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Construction of powder-coated steel
- LED Lighting
- MDF front panel and sides
- Front and side glasses with heaters
- Side and front glasses with silver serigraphy
- Silver finishes
- Stainless steel worktop
- Night blind
- White lighting
- Wheels
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Lift up system of front glass
- Digital temperature control

OPTIONS:

- Spoon washer
- For individual decoration
- Wooden casing
- Highlighted Plexiglas front
- Water cooled condenser




SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
SR12-GF	46 1/2"	49 1/4"	56 1/8"	12	441 / 200	220V / 60Hz / 1ph 8 AMP
SR18-GF	66 1/4"	49 1/4"	56 1/8"	18	617 / 280	220V / 60Hz / 1ph 12 AMP
SR24-GF	89 3/4"	49 1/4"	56 1/8"	24	728 / 330	220V / 60Hz / 1ph 14 AMP

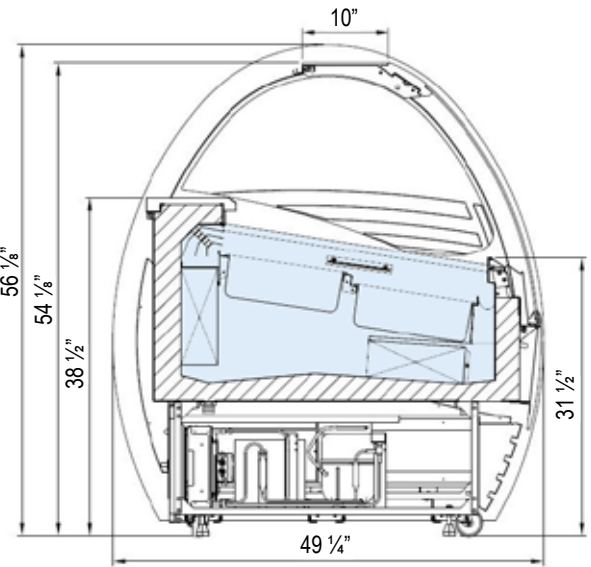

* Temperature range given for max ambient temp of +30°C and relative humidity of 55%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (Hawana W); 350W/1mr at evaporating temp. -25°C

Available Colors



GELATO DISPLAY CASE

RF-GF
STRAIGHT FRONT GLASS GELATO DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED Lighting
- MDF front panel and sides
- Double layer of front and side glasses
- Front and side glasses with black serigraphy
- Stainless steel worktop
- Night blind
- White lighting
- Wheels
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Front opening glass
- Digital temperature control

OPTIONS:


- Spoon washer
- For individual decoration
- Wooden casing
- Highlighted Plexiglas front
- Water cooled condenser



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
RF4-GF	25"	33 3/4"	54"	4	199 / 90	115V / 60Hz / 1ph / 11 AMP 220V / 60Hz / 1ph / 7 AMP
RF10-GF	54 1/8"	33 3/4"	54"	10	419 / 190	115V / 60Hz / 1ph / 13.5 AMP 220V / 60Hz / 1ph / 9 AMP




* Temperature range given for max ambient temp of +30°C and relative humidity of 55%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (Hawana W); 350W/1mr at evaporating temp. -25°C

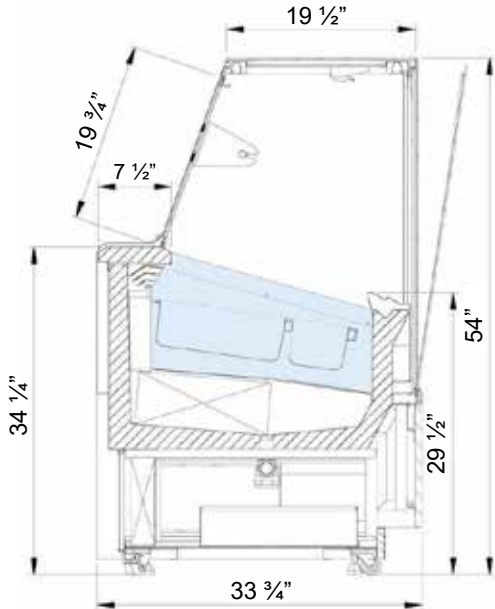

Wood Stains



Available Colors





GELATO DISPLAY CASE

PRD-GF
STRAIGHT FRONT GLASS GELATO DISPLAY CASE


DESCRIPTION OF STANDARD UNIT:

- Ventilated cooling
 - Construction of powder-coated steel
 - LED Lighting
 - MDF front panel and sides
 - Double layer of front and side glasses
 - Side and front glasses with black serigraphy
 - Silver finishes
 - Stainless steel worktop
 - Night blind
 - Wheels
 - Forced cooling
 - Temp. range*: -12 ÷ -24°C
 - Automatic defrosting
 - Automatic water Evaporation
 - Ice-cream containers
 - front opening glass
 - Digital temperature control
 - Screen printing
 - Stainless steel storage area
 - Color design or wooden cladding
- OPTIONS:

 - Spoon washer
 - For individual decoration
 - Wooden casing
 - Highlighted Plexiglas front
 - Water cooled condenser



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
PRD12-GF	48 1/2"	45 1/4"	47 5/8"	12	485 / 220	220V / 60Hz / 1ph 8 AMP
PRD18-GF	67 7/8"	45 1/4"	47 5/8"	18	639 / 290	220V / 60Hz / 1ph 12 AMP
PRD24-GF	93 7/8"	45 1/4"	47 5/8"	24	749 / 340	220V / 60Hz / 1ph 14 AMP

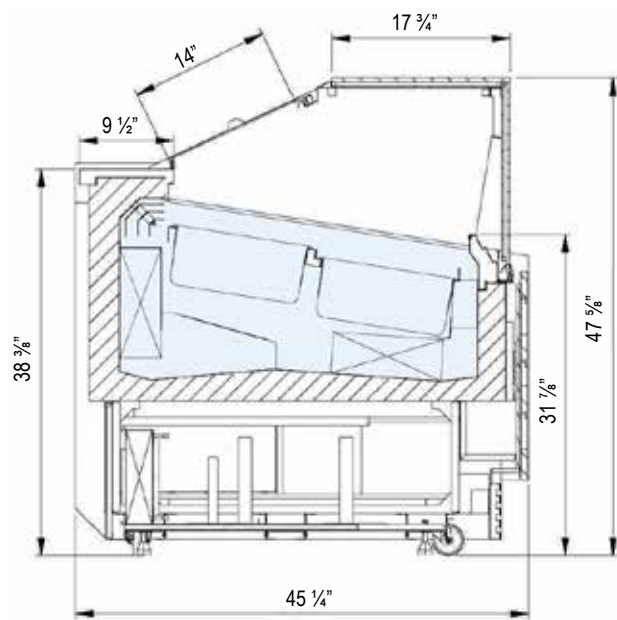

* Temperature range given for max ambient temp of +30°C and relative humidity of 55%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (Hawana W); 350W/1mr at evaporating temp. -25°C

Wood Stains

22-05
Burnat

Calvados

22-66
Dark Nut

23-63
Dark Teak

22-74
Light Nut

23-32
Light Teak

22-68
Nut

23-25
Orange

26-36
Palisander

Available Colors

RAL 1015
Beige

RAL 1023
Traffic Yellow

RAL 3020
Traffic Red

RAL 5015
Sky Blue

RAL 6032
Signal Green

RAL 9016
Traffic White

RAL 9005
Jet Black

RAL 9006
White Aluminium

RAL 1018
Zinc Yellow

RAL 1036
Pearl Gold

RAL 2004
Pure Orange

RAL 3004
Purple Red

RAL 4010
Telemagenta

RAL 5002
Ultramarine Blue

RAL 6018
Yellow Green

RAL 7016
Anthracite Grey

RAL 7022
Umbr Grey

RAL 7035
Light Grey

RAL 8016
Mahogany Brown

RAL 9010
Pure White Structural



PRD-GF





GELATO DISPLAY CASE


MG-GF STRAIGHT FRONT GLASS GELATO DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of stainless steel
- LED Lighting
- MDF front panel and sides
- Front and side glasses with heaters
- Side and front glasses with silver or black serigraphy
- Lift up system of front glass (in corner hinged front glasses)
- Granite worktop
- Night blind (in corner Plexiglas shutters)
- White lighting
- Wheels
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Digital temperature control
- Digital temperature control

OPTIONS:

- Spoon washer
- For individual decoration
- Wooden casing
- Highlighted Plexiglas front
- Water cooled condenser

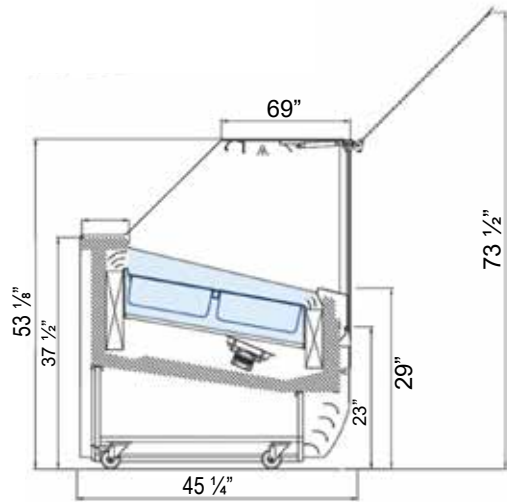

SPECIFICATIONS


MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
MG12-GF	45 1/2"	45 1/4"	53 1/8"	12	551 / 250	220V / 60Hz / 1ph 8 AMP
MG18-GF	65 1/4"	45 1/4"	53 1/8"	18	727 / 330	220V / 60Hz / 1ph 10 AMP
MG24-GF	85"	45 1/4"	53 1/8"	24	860 / 390	220V / 60Hz / 1ph 12 AMP

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Wood Stains



Available Colors



MG-GF





MGC-GF



GELATO DISPLAY CASE

MGC90-GF
STRAIGHT FRONT GLASS GELATO DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of stainless steel
- LED Lighting
- MDF front panel and sides
- Front and side glasses with heaters
- Side and front glasses with silver or black serigraphy
- Lift up system of front glass (in corner hinged front glasses)
- Granite worktop
- Night blind (in corner Plexiglas shutters)
- White lighting
- Wheels
- Forced cooling
- Temp. range*: -12 ÷ -24°C
- Automatic defrosting
- Automatic water Evaporation
- Ice-cream containers
- Digital temperature control
- Digital temperature control


OPTIONS:

- Spoon washer
- For individual decoration
- Wooden casing
- Highlighted Plexiglas front
- Water cooled condenser



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	NUMBERS OF PANS	WEIGHT (LBS / KG)	ELECTRICAL
MGC90-GF	68 7/8"	45 1/4"	53 1/8"	17	815 / 370	220V / 60Hz / 1ph 10 AMP

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

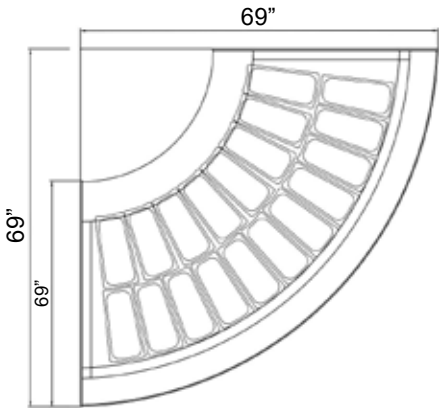

Wood Stains



Available Colors





DELI / MEAT DISPLAY CASE

HWM-RD

CHEESE / DELI / MEAT /REFRIGERATED DISPLAY CASE
DOUBLE COIL / DOUBLE GLASS

DESCRIPTION OF STANDARD UNIT:

- Double gravity coil
- LED Market lighting
- Double front and side glass
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator
- Heated Aluminum glass profile
- Temp. range* : 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Multiplexing
- Shelf
- Two levels exposition trays
- Stainless steel shelf for customer
- Wheels
- Back work top


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HWM4-RD	52 ¾"	47 ⅞"	49 ¼"	551 / 250	115V / 60Hz / 1ph / 8.5 AMP
HWM6-RD	81 ¾"	47 ⅞"	49 ¼"	790 / 250	115V / 60Hz / 1ph / 9.5 AMP
HWM8-RD	101 ½"	47 ⅞"	49 ¼"	1080 / 490	115V / 60Hz / 1ph / 10.5 AMP
HWM12-RD	151 ½"	47 ⅞"	49 ¼"	1338 / 607	115V / 60Hz / 1ph / 13.5 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors

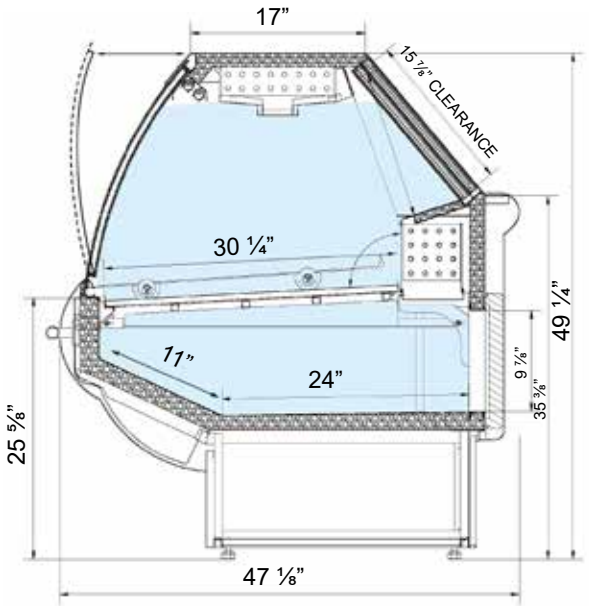

HWM-RD



HW-RD



DELI / MEAT DISPLAY CASE

HW-RD

CURVED GLASS - DELI / MEAT / CHEESE / SALAD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting.
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Stainless steel storage chamber (except corners)
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* (G): 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Salad Display Table (HW-SD) temp. range*: 0 ÷ +4 °C
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Glass shelf
- Separators: movable or stabile



- Stainless steel shelf for customer
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop
- Lift up system of front glass



SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HW3-RD	42 ½"	45 ½"	49 ¼"	319 / 145	115V / 60Hz / 1ph / 6 AMP
HW4-RD	52 ¼"	45 ½"	49 ¼"	375 / 170	115V / 60Hz / 1ph / 6 AMP
HW5-RD	62 ½"	45 ½"	49 ¼"	430 / 195	115V / 60Hz / 1ph / 8 AMP
HW6-RD	81 ¾"	45 ½"	49 ¼"	507 / 230	115V / 60Hz / 1ph / 8 AMP
HW8-RD	101 ½"	45 ½"	49 ¼"	683 / 310	115V / 60Hz / 1ph / 8 AMP
HW10-RD	121 ¼"	45 ½"	49 ¼"	859 / 390	115V / 60Hz / 1ph / 10.5 AMP
HW12-RD	150 ½"	45 ½"	49 ¼"	1036 / 470	115V / 60Hz / 1ph / 11 AMP

Wood Stains



Available Colors

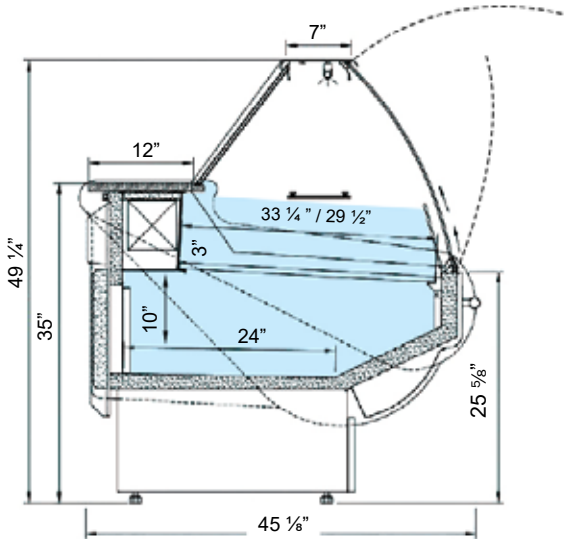



MD-RD



DELI / MEAT DISPLAY CASE

MD-RD

CURVED GLASS - CHEESE / DELI / MEAT CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting.
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Decorative strip on base
- Stainless steel worktop
- Stainless steel storage chamber (except corners)
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* (G): 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Salad Display Table (MD-SD) temp. range*: 0 ÷ +4 °C
- Hot version (MD-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Glass shelf
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop
- Lift up system of front glass




SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MD3-RD	42 1/2"	43 1/4"	49 1/4"	243 / 110	115V / 60Hz / 1ph / 6 AMP
MD4-RD	52 1/4"	43 1/4"	49 1/4"	298 / 135	115V / 60Hz / 1ph / 6 AMP
MD5-RD	62 1/8"	43 1/4"	49 1/4"	364 / 165	115V / 60Hz / 1ph / 8 AMP
MD6-RD	81 3/8"	43 1/4"	49 1/4"	463 / 210	115V / 60Hz / 1ph / 8 AMP
MD8-RD	101 1/2"	43 1/4"	49 1/4"	540 / 245	115V / 60Hz / 1ph / 8 AMP
MD10-RD	121 1/4"	43 1/4"	49 1/4"	617 / 280	115V / 60Hz / 1ph / 10.5 AMP
MD12-RD	150 5/8"	43 1/4"	49 1/4"	948 / 430	115V / 60Hz / 1ph / 11 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors

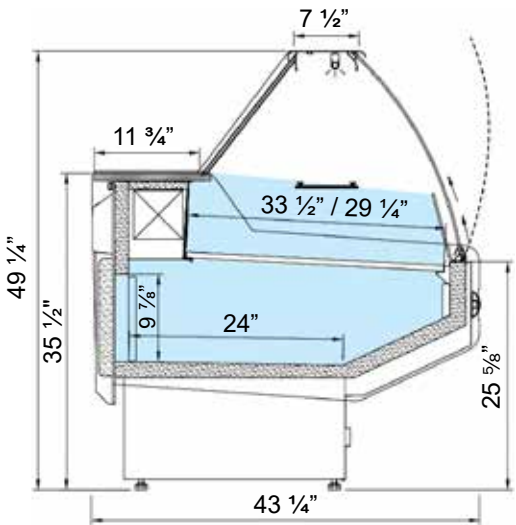




DELI / MEAT DISPLAY CASE

MDS-RD
STRAIGHT FRONT GLASS CHEESE / DELI / MEAT CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with forced cooling (F): 0 ÷ +4 °C
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

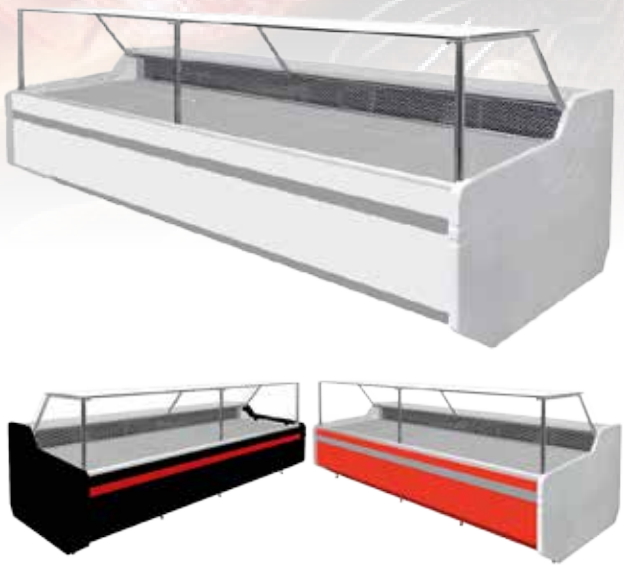


OPTIONS:

- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- Fish version, temp. range (F): 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version



SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDS3-RD	42 1/2"	44 1/4"	49 1/4"	319 / 145	115V / 60Hz / 1ph / 6 AMP
MDS4-RD	52 1/4"	44 1/4"	49 1/4"	375 / 170	115V / 60Hz / 1ph / 6 AMP
MDS5-RD	62 1/8"	44 1/4"	49 1/4"	430 / 195	115V / 60Hz / 1ph / 8 AMP
MDS6-RD	81 3/8"	44 1/4"	49 1/4"	507 / 230	115V / 60Hz / 1ph / 8 AMP
MDS8-RD	101 1/2"	44 1/4"	49 1/4"	683 / 310	115V / 60Hz / 1ph / 8 AMP
MDS10-RD	121 1/4"	44 1/4"	49 1/4"	859 / 390	115V / 60Hz / 1ph / 10.5 AMP
MDS12-RD	150 5/8"	44 1/4"	49 1/4"	1036 / 470	115V / 60Hz / 1ph / 11 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors

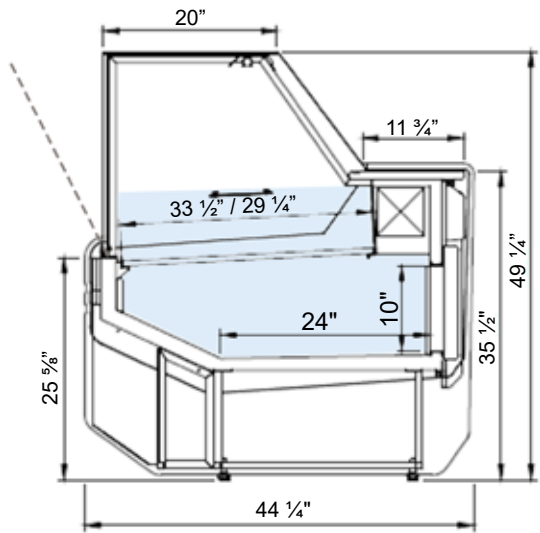

DELI / MEAT DISPLAY CASE


SL-RD
STRAIGHT FRONT GLASS CHEESE / DELI / MEAT CASE

DESCRIPTION OF STANDARD UNIT:

- Forced cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with forced cooling (F): 0 ÷ +4 °C
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:

- For external condensing unit
- Hot version (SVL-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- Fish version, temp. range (F): 0 ÷ +4 °C
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version

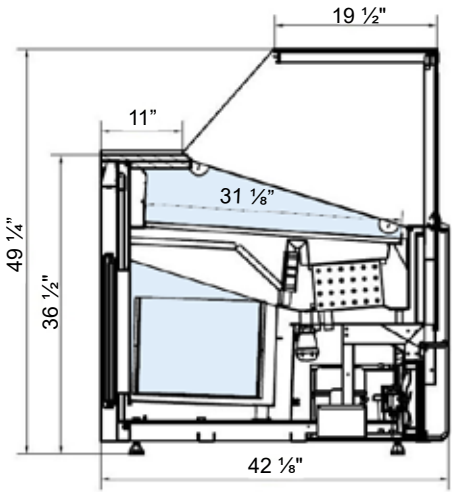

SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
SL4-RD	52 ¼"	42 ⅛"	49 ¼"	375 / 170	115V / 60Hz / 1ph / 6 AMP
SL8-RD	101 ½"	42 ⅛"	49 ¼"	683 / 310	115V / 60Hz / 1ph / 8 AMP
SL12-RD	150 ¾"	42 ⅛"	49 ¼"	1036 / 470	115V / 60Hz / 1ph / 11 AMP



* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



DELI / MEAT DISPLAY CASE

MDSN-RD SLIM-LINE - 35 1/2" DEPTH
STRAIGHT FRONT GLASS CHEESE / DELI / MEAT CASE



DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with forced cooling (F): 0 ÷ +4 °C
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:


- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- Fish version, temp. range (F): 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDSN4-RD	52 1/4"	35 1/2"	49 1/4"	242 / 110	115V / 60Hz / 1ph / 6 AMP
MDSN5-RD	62 1/8"	35 1/2"	49 1/4"	298 / 135	115V / 60Hz / 1ph / 8 AMP
MDSN6-RD	81 3/8"	35 1/2"	49 1/4"	375 / 170	115V / 60Hz / 1ph / 8 AMP
MDSN8-RD	101 1/2"	35 1/2"	49 1/4"	441 / 200	115V / 60Hz / 1ph / 8 AMP

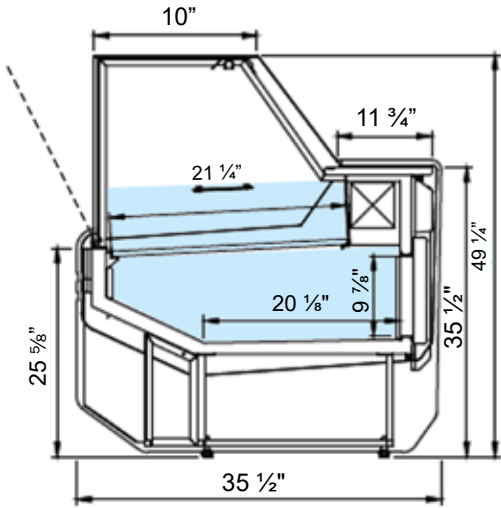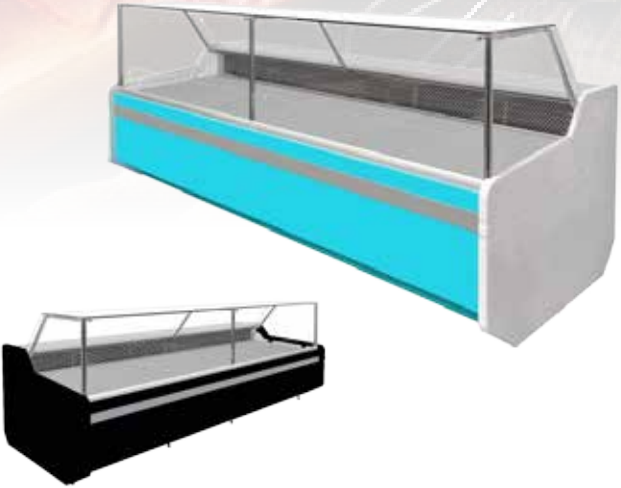

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



DELI / MEAT DISPLAY CASE

MDN-RD SLIM-LINE - 35 1/2" DEPTH
CURVED GLASS - CHEESE / DELI / MEAT CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with forced cooling (F): 0 ÷ +4 °C
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:


- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- Fish version, temp. range (F): 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDN4-RD	52 1/4"	35 1/2"	49 1/4"	242 / 110	115V / 60Hz / 1ph / 6 AMP
MDSN5-RD	62 1/8"	35 1/2"	49 1/4"	298 / 135	115V / 60Hz / 1ph / 8 AMP
MDSN6-RD	81 3/8"	35 1/2"	49 1/4"	375 / 170	115V / 60Hz / 1ph / 8 AMP
MDN8-RD	101 1/2"	35 1/2"	49 1/4"	441 / 200	115V / 60Hz / 1ph / 8 AMP





* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors

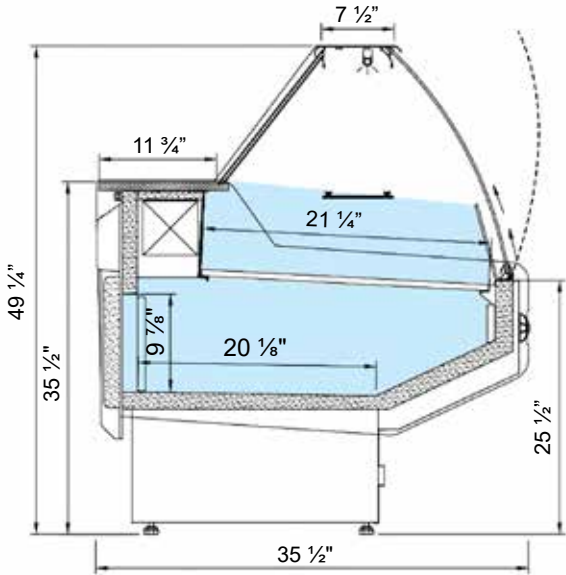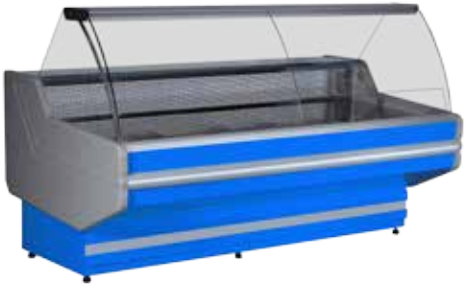

DELI / MEAT DISPLAY CASE

MDSL-RD

LOW GLASS / GRAB & GO - REFRIGERATED CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with forced cooling (F): 0 ÷ +4 °C
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control


OPTIONS:

- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- Fish version, temp. range (F): 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDSL3-RD	42 ½"	44 ½"	35 ½"	284 / 128	115V / 60Hz / 1ph 6 AMP
MDSL4-RD	52 ¼"	44 ½"	35 ½"	345 / 156	115V / 60Hz / 1ph 6 AMP
MDSL5-RD	62 ⅝"	44 ½"	35 ½"	390 / 177	115V / 60Hz / 1ph 8 AMP
MDSL6-RD	81 ¾"	44 ½"	35 ½"	465 / 211	115V / 60Hz / 1ph 8 AMP
MDSL8-RD	101 ½"	44 ½"	35 ½"	645 / 293	115V / 60Hz / 1ph 8 AMP
MDSL10-RD	121 ¼"	44 ½"	35 ½"	811 / 368	115V / 60Hz / 1ph 10.5 AMP
MDSL12-RD	150 ⅝"	44 ½"	35 ½"	990 / 449	115V / 60Hz / 1ph 11 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



DELI / MEAT DISPLAY CASE

HWL-RD

LOW GLASS / GRAB & GO - REFRIGERATED CASE

DESCRIPTION OF STANDARD UNIT:

- Gravity cooling
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Stainless steel storage chamber (except corners)
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Automatic water Evaporation
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Digital temperature control


OPTIONS:

- For external condensing unit
- Serve-over version, temp. range*: 0 ÷ +4 °C
- Forced cooling version, temp. range (F): 0 ÷ +4 °C
- White lighting
- Multiplexing
- Granite worktop
- Wheels
- Cash registers cabinet


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HWL3-RD	42 ½"	45 ⅛"	49 ¼"	284 / 128	115V / 60Hz / 1ph / 6 AMP
HWL4-RD	52 ¼"	45 ⅛"	49 ¼"	345 / 156	115V / 60Hz / 1ph / 6 AMP
HWL5-RD	62 ⅞"	45 ⅛"	49 ¼"	390 / 177	115V / 60Hz / 1ph / 8 AMP
HWL6-RD	81 ¾"	45 ⅞"	49 ¼"	465 / 211	115V / 60Hz / 1ph / 8 AMP
HWL8-RD	101 ½"	45 ⅞"	49 ¼"	645 / 293	115V / 60Hz / 1ph / 8 AMP
HWL10-RD	121 ¼"	45 ⅞"	49 ¼"	811 / 368	115V / 60Hz / 1ph / 10.5 AMP
HWL12-RD	150 ⅝"	45 ⅞"	49 ¼"	990 / 449	115V / 60Hz / 1ph / 11 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



DELI / MEAT DISPLAY CASE

HWC-RD


CURVED GLASS CORNER REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Forced cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Heated Aluminum glass profile
- Temp. range* : 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Hot version (HW-H) - temp. range*:+40 ÷ +90 °C
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop

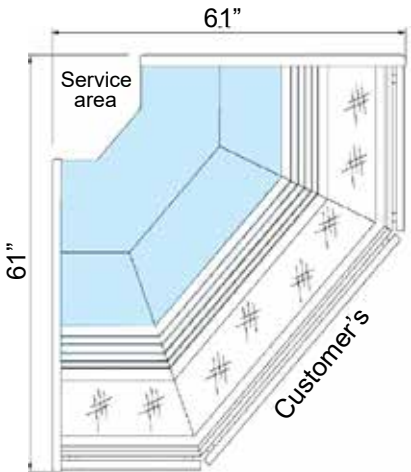

HWC90-ORD

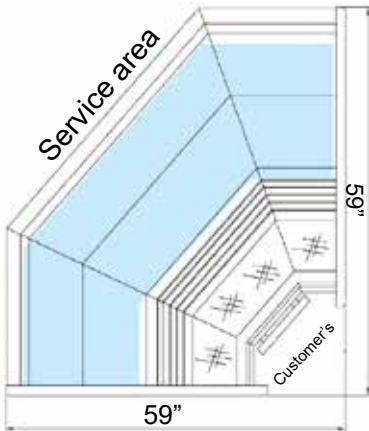

HWC90-IRD

DELI / MEAT DISPLAY CASE

MDC-RD


CURVED GLASS CORNER REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Forced cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Heated Aluminum glass profile
- Temp. range* : 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Hot version (HW-H) - temp. range*:+40 ÷ +90 °C
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop

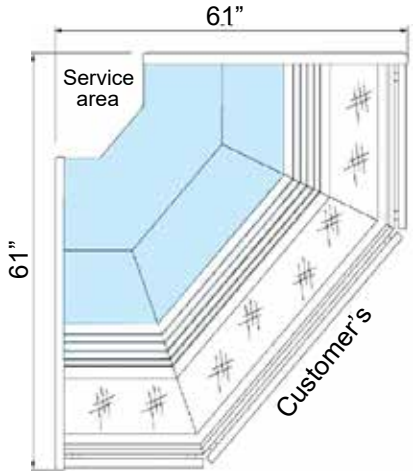

MDC90-ORD

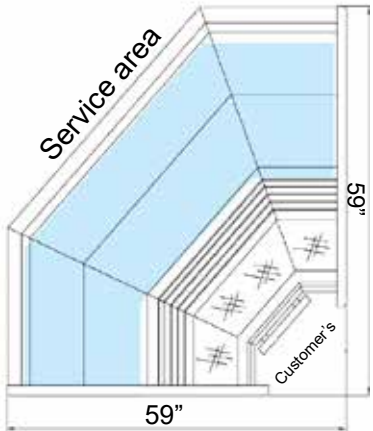

MDC90-IRD

SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HWC90-IRD	59"	45 1/8"	49 1/4"	330 / 150	115V / 60Hz / 1ph 8 AMP
HWC90-ORD	61"	45 1/8"	49 1/4"	330 / 150	115V / 60Hz / 1ph 8 AMP



* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDC90-IRD	59"	45 1/8"	49 1/4"	330 / 150	115V / 60Hz / 1ph 8 AMP
MDC90-ORD	61"	45 1/8"	49 1/4"	330 / 150	115V / 60Hz / 1ph 8 AMP



* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



CASH-OUT COUNTER

HW-COC

CHECK-OUT CASH COUNTER - NON REFRIGERATED

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop

OPTIONS:

- Granite worktop
- Wheels
- Colors of choice



HW-COC

SPECIFICATIONS				
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)
HW3-COC	35 ½"	47 ⅞"	35 ½"	315 / 142
HW4-COC	47 ½"	47 ⅞"	35 ½"	418 / 190

****Custom length available****




MATCHING HW-RD


Granite Finishes



Wood Stains



Available Colors



CASH-OUT COUNTER

MDS-COC

CHECK-OUT CASH COUNTER - NON REFRIGERATED

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop


OPTIONS:

- Granite worktop
- Wheels
- Colors of choice




SPECIFICATIONS				
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)
MDS3-COC	35 ½"	44 ¼"	35 ½"	198 / 90

****Custom length available****

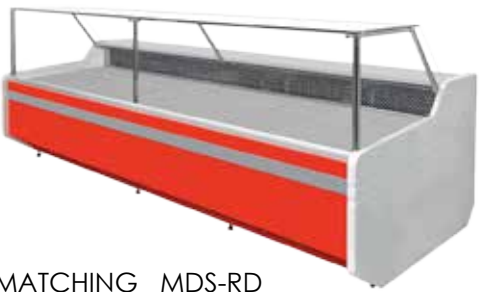

MATCHING MDS-RD

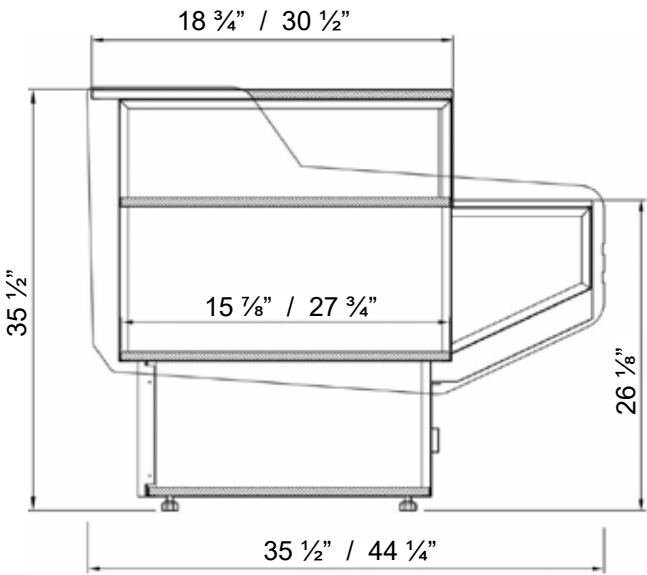


* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).


Granite Finishes



Wood Stains



Available Colors



FISH / SEAFOOD DISPLAY CASE

HWF-RD
CURVED FRONT GLASS FISH CASE

DESCRIPTION OF STANDARD UNIT:

- Gravity cooling
- Coated evaporator coil
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Ice pan
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:

- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- Corner unit
- Multiplexing
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Lift up system of front glass
- Wheels




SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HWF3-RD	42 1/2"	45 1/8"	49 1/4"	325 / 147	115V / 60Hz / 1ph / 6 AMP
HWF4-RD	52 1/4"	45 1/8"	49 1/4"	380 / 172	115V / 60Hz / 1ph / 6 AMP
HWF5-RD	62 1/8"	45 1/8"	49 1/4"	440 / 199	115V / 60Hz / 1ph / 8 AMP
HWF6-RD	81 3/4"	45 1/8"	49 1/4"	520 / 235	115V / 60Hz / 1ph / 8 AMP
HWF8-RD	101 1/2"	45 1/8"	49 1/4"	698 / 316	115V / 60Hz / 1ph / 8 AMP
HWF10-RD	121 1/4"	45 1/8"	49 1/4"	880 / 399	115V / 60Hz / 1ph / 10.5 AMP
HWF12-RD	150 5/8"	45 1/8"	49 1/4"	1055 / 478	115V / 60Hz / 1ph / 11 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors



FISH / SEAFOOD DISPLAY CASE

MDSF-RD
SQUARE FRONT GLASS FISH CASE

DESCRIPTION OF STANDARD UNIT:

- Gravity cooling
- Coated evaporator coil
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Ice pan
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:

- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version






SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDSF3-RD	42 1/2"	44 1/4"	49 1/4"	325 / 147	115V / 60Hz / 1ph / 6 AMP
MDSF4-RD	52 1/4"	44 1/4"	49 1/4"	380 / 172	115V / 60Hz / 1ph / 6 AMP
MDSF5-RD	62 1/8"	44 1/4"	49 1/4"	440 / 199	115V / 60Hz / 1ph / 8 AMP
MDSF6-RD	81 3/8"	44 1/4"	49 1/4"	520 / 235	115V / 60Hz / 1ph / 8 AMP
MDSF8-RD	101 1/2"	44 1/4"	49 1/4"	698 / 316	115V / 60Hz / 1ph / 8 AMP
MDSF10-RD	121 1/4"	44 1/4"	49 1/4"	880 / 399	115V / 60Hz / 1ph / 10.5 AMP
MDSF12-RD	150 5/8"	44 1/4"	49 1/4"	1055 / 478	115V / 60Hz / 1ph / 11 AMP

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.
** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors

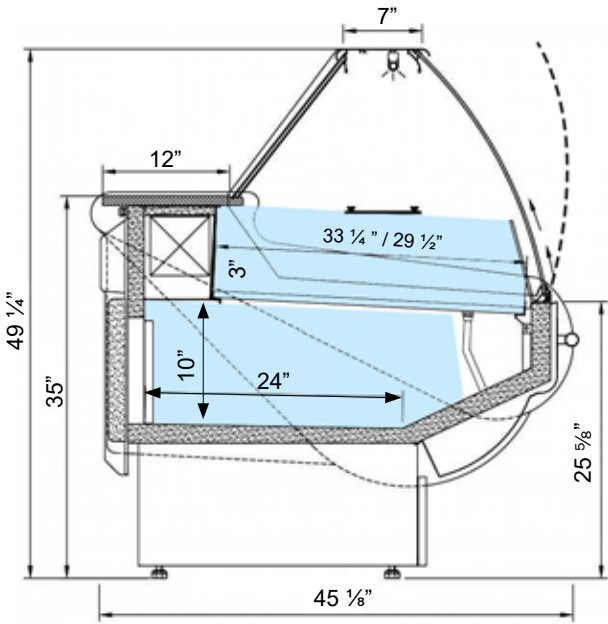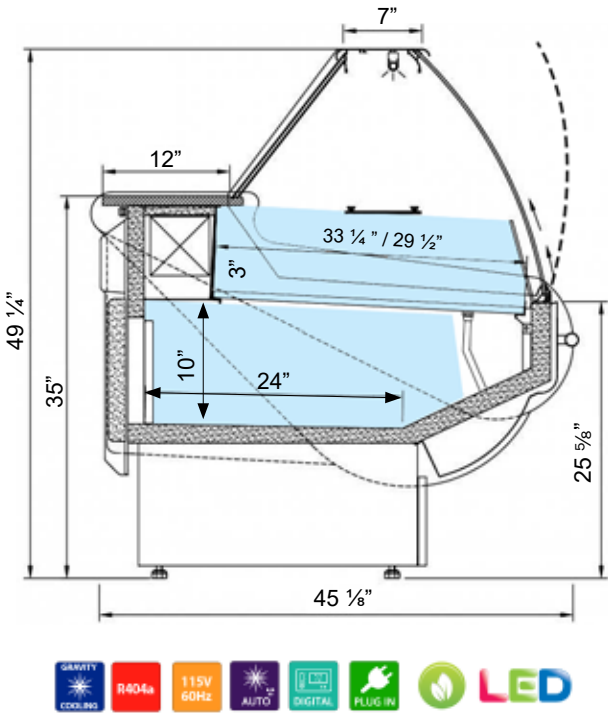

FISH / SEAFOOD DISPLAY CASE

MDNF-RD SLIM-LINE - 35 1/2" DEPTH
CURVED FRONT GLASS FISH CASE

DESCRIPTION OF STANDARD UNIT:


- Gravity cooling
- Coated evaporator coil
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Ice pan
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:

- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version




SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDNF4-RD	52 1/4"	35 1/2"	49 1/4"	298 / 135	115V / 60Hz / 1ph 6 AMP
MDNF5-RD	62 1/8"	35 1/2"	49 1/4"	364 / 165	115V / 60Hz / 1ph 8 AMP
MDNF6-RD	81 3/8"	35 1/2"	49 1/4"	463 / 210	115V / 60Hz / 1ph 8 AMP
MDNF8-RD	101 1/2"	35 1/2"	49 1/4"	540 / 245	115V / 60Hz / 1ph 8 AMP

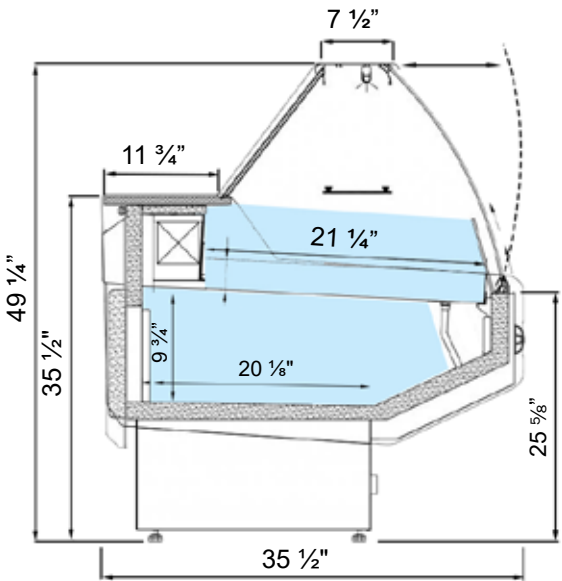

Wood Stains



Available Colors



FISH / SEAFOOD DISPLAY CASE


MDSNF-RD SLIM-LINE - 35 1/2" DEPTH
SQUARE FRONT GLASS FISH CASE

DESCRIPTION OF STANDARD UNIT:

- Gravity cooling
- Coated evaporator coil
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Ice pan
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:

- For external condensing unit
- Hot version (HW-H) - temp. range*: +40 ÷ +90 °C
- Self-service version, temp. range*: 0 ÷ +4 °C
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version

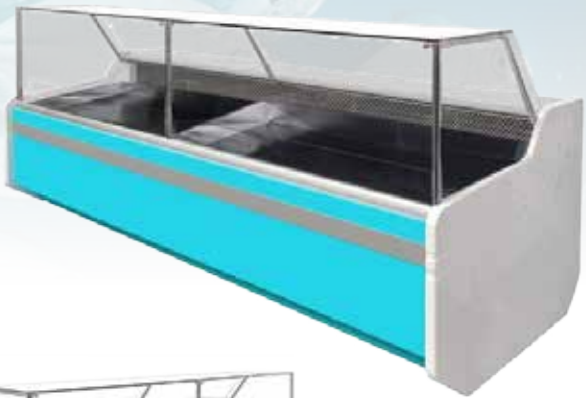

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDSNF4-RD	52 1/4"	35 1/2"	49 1/4"	298 / 135	115V / 60Hz / 1ph 6 AMP
MDSNF5-RD	62 1/8"	35 1/2"	49 1/4"	364 / 165	115V / 60Hz / 1ph 8 AMP
MDSNF6-RD	81 3/8"	35 1/2"	49 1/4"	463 / 210	115V / 60Hz / 1ph 8 AMP
MDSNF8-RD	101 1/2"	35 1/2"	49 1/4"	540 / 245	115V / 60Hz / 1ph 8 AMP





* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.

** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

Wood Stains



Available Colors

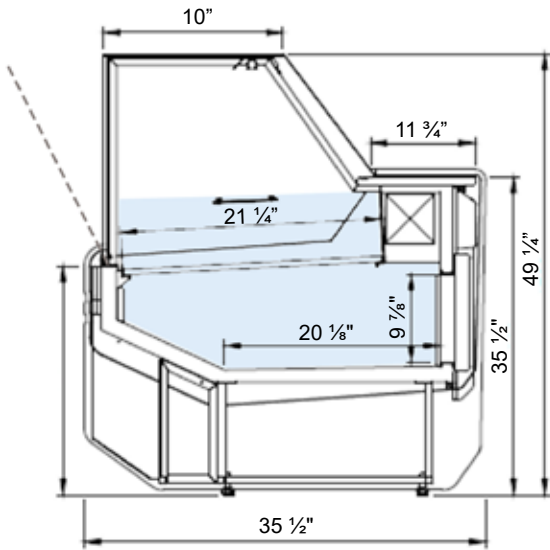



HWF-RD



MDSF-RD





HEATED DISPLAY CASE

JK-HD CURVED FRONT GLASS HOT FOOD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder steel
- ABS sides
- Stainless steel work top
- Top LED lighting
- Temp. range* : +35 ÷ +90 °C
- Digital temperature control

OPTIONS:


- Granite top
- Colors of choice
- Wooden casing
- Cold version, salad case
- Wheels



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	PANS	ELECTRICAL
JK2-HD	37 ¾"	27 ¾"	53 ¼"	330 / 150	2	220V / 60Hz / 1ph 13 AMP
JK3-HD	51 ¼"	27 ¾"	53 ¼"	352 / 160	3	220V / 60Hz / 1ph 13 AMP
JK4-HD	59 ¼"	27 ¾"	53 ¼"	396 / 180	4	220V / 60Hz / 1ph 17 AMP
JK5-HD	73 ¾"	27 ¾"	53 ¼"	440 / 200	5	220V / 60Hz / 1ph 20 AMP
JK6-HD	91 ½"	27 ¾"	53 ¼"	485 / 220	6	220V / 60Hz / 1ph 24 AMP



Wood Stains



Available Colors



HEATED DISPLAY CASE

JKS-HD SQUARE FRONT GLASS HOT FOOD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder steel
- ABS sides
- Stainless steel work top
- Top LED lighting
- Temp. range* : +35 ÷ +90 °C
- Digital temperature control

OPTIONS:


- Granite top
- Colors of choice
- Wooden casing
- Cold version, salad case
- Wheels




SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	PANS	ELECTRICAL
JKS2-HD	37 ¾"	27 ¾"	53 ¼"	330 / 150	2	220V / 60Hz / 1ph 13 AMP
JKS3-HD	51 ¼"	27 ¾"	53 ¼"	352 / 160	3	220V / 60Hz / 1ph 13 AMP
JKS4-HD	59 ¼"	27 ¾"	53 ¼"	396 / 180	4	220V / 60Hz / 1ph 17 AMP
JKS5-HD	73 ¾"	27 ¾"	53 ¼"	440 / 200	5	220V / 60Hz / 1ph 20 AMP
JKS6-HD	91 ½"	27 ¾"	53 ¼"	485 / 220	6	220V / 60Hz / 1ph 24 AMP



Wood Stains



Available Colors

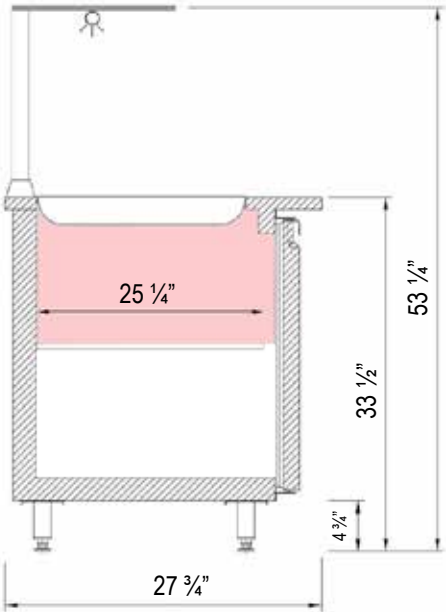



HEATED DISPLAY CASE


HW-HD CURVED FRONT GLASS HOT FOOD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder steel
- ABS sides
- Grey bumper
- Stainless steel work top
- Dual heated system, with upper infrared heating
- Top lighting
- Heated Aluminum glass profile
- Temp. range* : +35 ÷ +90 °C
- Front opening glass
- Digital temperature control


OPTIONS:

- Granite top
- Colors of choice
- Wooden casing
- Lift up system of front glass
- Cold version, salad case
- Wheels

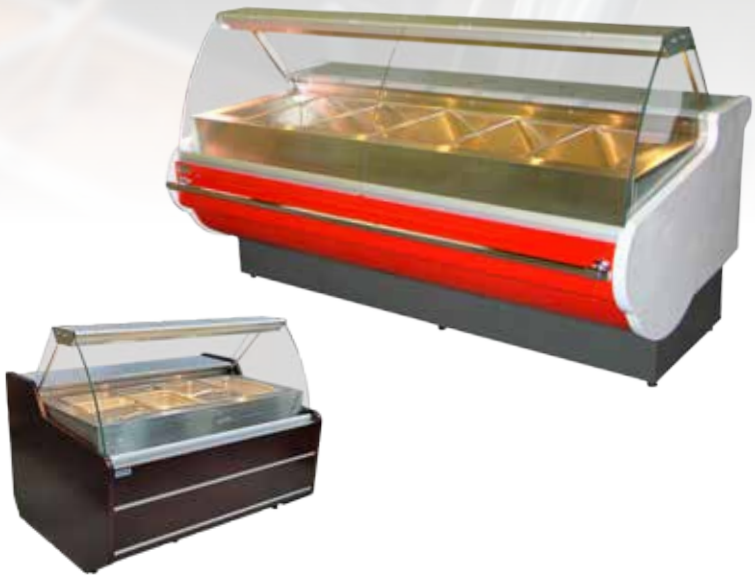


COSTUME FINISH AVAILABLE

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HW3-HD	42 ½"	45 ⅞"	49 ¼"	325 / 147	220V / 60Hz / 1ph / 13 AMP
HW4-HD	52 ¼"	45 ⅞"	49 ¼"	380 / 172	220V / 60Hz / 1ph / 13 AMP
HW5-HD	62 ⅞"	45 ⅞"	49 ¼"	440 / 199	220V / 60Hz / 1ph / 17 AMP
HW6-HD	81 ¾"	45 ⅞"	49 ¼"	520 / 235	220V / 60Hz / 1ph / 17AMP
HW8-HD	101 ½"	45 ⅞"	49 ¼"	698 / 316	220V / 60Hz / 1ph / 24AMP
HW10-HD	121 ¼"	45 ⅞"	49 ¼"	880 / 399	220V / 60Hz / 1ph / 28AMP
HW12-HD	150 ⅝"	45 ⅞"	49 ¼"	1055 / 478	220V / 60Hz / 1ph / 32AMP

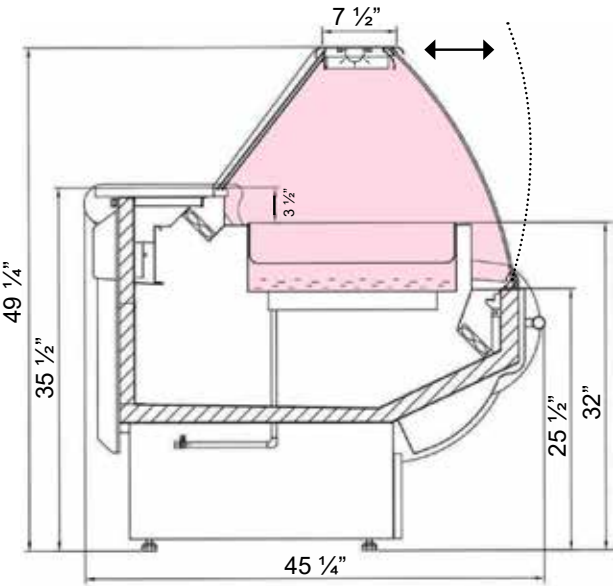

Wood Stains



Available Colors



HEATED DISPLAY CASE

MDS-HD SQUARE FRONT GLASS HOT FOOD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Construction of powder steel
- ABS sides
- Grey bumper
- Stainless steel work top
- Dual heated system, with upper infrared heating
- Top lighting
- Heated Aluminum glass profile
- Temp. range* : +35 ÷ +90 °C
- Front opening glass
- Digital temperature control

OPTIONS:


- Granite top
- Colors of choice
- Wooden casing
- Cold version, salad case
- Wheels



SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDS3-HD	42 ½"	44 ¼"	49 ¼"	325 / 147	220V / 60Hz / 1ph / 13 AMP
MDS4-HD	52 ¼"	44 ¼"	49 ¼"	380 / 172	220V / 60Hz / 1ph / 13 AMP
MDS5-HD	62 ⅞"	44 ¼"	49 ¼"	440 / 199	220V / 60Hz / 1ph / 17 AMP
MDS6-HD	81 ¾"	44 ¼"	49 ¼"	520 / 235	220V / 60Hz / 1ph / 17 AMP
MDS8-HD	101 ½"	44 ¼"	49 ¼"	698 / 316	220V / 60Hz / 1ph / 24 AMP
MDS10-HD	121 ¼"	44 ¼"	49 ¼"	880 / 399	220V / 60Hz / 1ph / 28 AMP
MDS12-HD	150 ⅝"	44 ¼"	49 ¼"	1055 / 478	220V / 60Hz / 1ph / 32 AMP

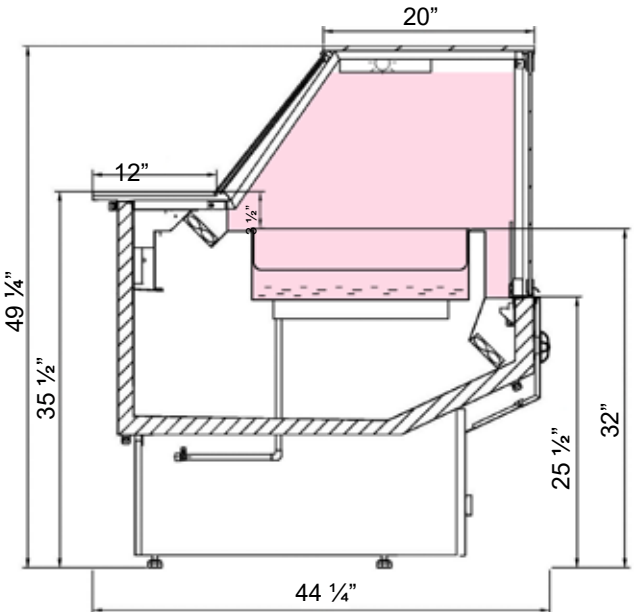

Wood Stains



Available Colors





SALAD DISPLAY CASE

JK-SD
CURVED FRONT GLASS SALAD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- Front & sides panel made of stainless steel, or MDF (custom).
- Refrigerated storage chamber
- Highlighted glass top
- Stainless steel worktop
- Forced cooling
- Temp. range*: 0 °C ÷ +4 °C
- Automatic defrosting
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- Granite top
- Colors of choice
- Wooden casing
- Heated version
- Wheels


SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	PANS	WEIGHT (LBS / KG)	ELECTRICAL
JK2-SD	37 ¾"	27 ¾"	33 ½"	2	330 / 150	115V / 60Hz / 1ph / 6 AMP
JK3-SD	51 ¼"	27 ¾"	33 ½"	3	352 / 160	115V / 60Hz / 1ph / 6.5 AMP
JK4-SD	59 ¼"	27 ¾"	33 ½"	4	396 / 180	115V / 60Hz / 1ph / 7 AMP
JK5-SD	73 ¾"	27 ¾"	33 ½"	5	440 / 200	115V / 60Hz / 1ph / 8 AMP
JK6-SD	91 ½"	27 ¾"	33 ½"	6	485 / 220	115V / 60Hz / 1ph / 8.5 AMP

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Wood Stains



Available Colors

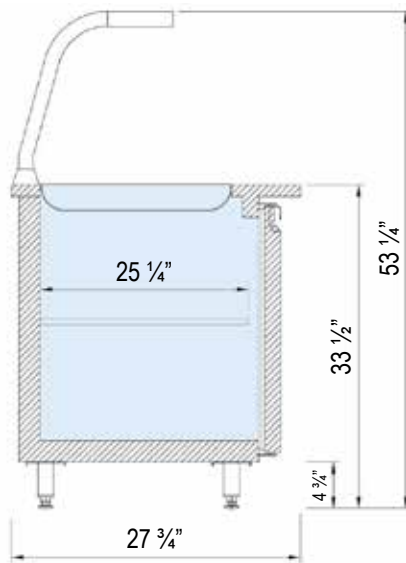

SALAD DISPLAY CASE

JKS-SD
SQUARE FRONT GLASS SALAD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- Front & sides panel made of stainless steel, or MDF (custom).
- Refrigerated storage chamber
- Highlighted glass top
- Stainless steel worktop
- Forced cooling
- Temp. range*: 0 °C ÷ +4 °C
- Automatic defrosting
- Automatic water Evaporation
- Digital temperature control

OPTIONS:

- Granite top
- Colors of choice
- Wooden casing
- Heated version
- Wheels


SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	PANS	WEIGHT (LBS / KG)	ELECTRICAL
JKS2-SD	37 ¾"	27 ¾"	33 ½"	2	330 / 150	115V / 60Hz / 1ph / 6 AMP
JKS3-SD	51 ¼"	27 ¾"	33 ½"	3	352 / 160	115V / 60Hz / 1ph / 6.5 AMP
JKS4-SD	59 ¼"	27 ¾"	33 ½"	4	396 / 180	115V / 60Hz / 1ph / 7 AMP
JKS5-SD	73 ¾"	27 ¾"	33 ½"	5	440 / 200	115V / 60Hz / 1ph / 8 AMP
JKS6-SD	91 ½"	27 ¾"	33 ½"	6	485 / 220	115V / 60Hz / 1ph / 8.5 AMP

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Wood Stains



Available Colors

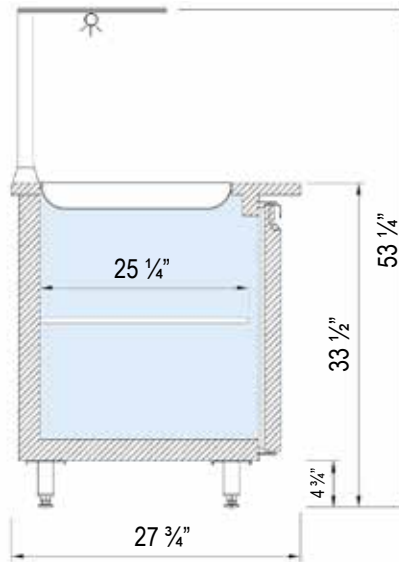

SALAD DISPLAY CASE

HW-SD
CURVED FRONT GLASS SALAD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Forced cooling
- LED Market lighting.
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Stainless steel storage chamber (except corners)
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* (G): 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control


OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Salad Display Table (HW-SD) temp. range*: 0 ÷ +4 °C
- Hot version (HW-H) - temp. range*:+40 ÷ +90 °C
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Glass shelf
- Separators: movable or stabile

- Stainless steel shelf for customer
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop
- Lift up system of front glass




SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HW3-SD	42 ½"	45 ⅛"	49 ¼"	319 / 145	115V / 60Hz / 1ph / 6 AMP
HW4-SD	52 ¼"	45 ⅛"	49 ¼"	375 / 170	115V / 60Hz / 1ph / 6 AMP
HW5-SD	62 ⅞"	45 ⅛"	49 ¼"	430 / 195	115V / 60Hz / 1ph / 8 AMP
HW6-SD	81 ¾"	45 ⅛"	49 ¼"	507 / 230	115V / 60Hz / 1ph / 8 AMP
HW8-SD	101 ½"	45 ⅛"	49 ¼"	683 / 310	115V / 60Hz / 1ph / 8 AMP
HW10-SD	121 ¼"	45 ⅛"	49 ¼"	859 / 390	115V / 60Hz / 1ph / 10.5 AMP
HW12-SD	150 ⅝"	45 ⅛"	49 ¼"	1036 / 470	115V / 60Hz / 1ph / 11 AMP

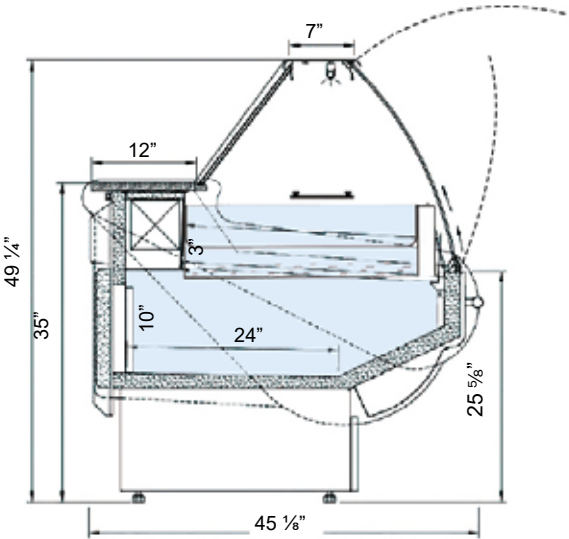

Wood Stains



Available Colors



SALAD DISPLAY CASE

MDS-SD
SQUARE FRONT GLASS SALAD DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Forced cooling
- LED Market lighting.
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Stainless steel storage chamber (except corners)
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* (G): 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control


OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Salad Display Table (HW-SD) temp. range*: 0 ÷ +4 °C
- Hot version (HW-H) - temp. range*:+40 ÷ +90 °C
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Glass shelf
- Separators: movable or stabile

- Stainless steel shelf for customer
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop
- Lift up system of front glass




SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDS3-SD	42 ½"	45 ⅛"	49 ¼"	319 / 145	115V / 60Hz / 1ph / 6 AMP
MDS4-SD	52 ¼"	45 ⅛"	49 ¼"	375 / 170	115V / 60Hz / 1ph / 6 AMP
MDS5-SD	62 ⅞"	45 ⅛"	49 ¼"	430 / 195	115V / 60Hz / 1ph / 8 AMP
MDS6-SD	81 ¾"	45 ⅛"	49 ¼"	507 / 230	115V / 60Hz / 1ph / 8 AMP
MDS8-SD	101 ½"	45 ⅛"	49 ¼"	683 / 310	115V / 60Hz / 1ph / 8 AMP
MDS10-SD	121 ¼"	45 ⅛"	49 ¼"	859 / 390	115V / 60Hz / 1ph / 10.5 AMP
MDS12-SD	150 ⅝"	45 ⅛"	49 ¼"	1036 / 470	115V / 60Hz / 1ph / 11 AMP

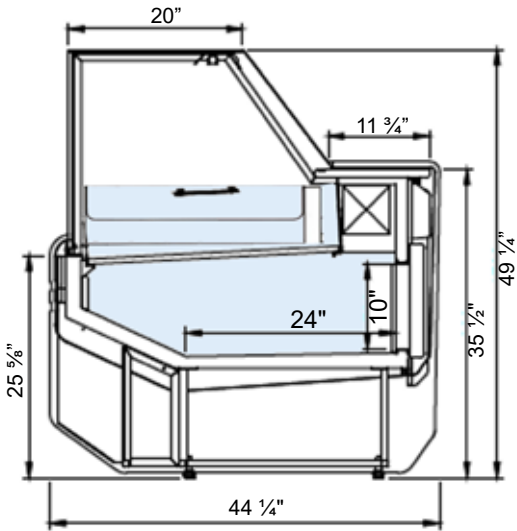

Wood Stains



Available Colors



OPEN MERCHANDISER

PC-ROM
REFRIGERATED OPEN MERCHANDISER


DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- ABS sides with glass
- Grey bumper
- 3 rows of adjustable shelves, highlighted
- Top lighting
- White lighting
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control

OPTIONS:


- Multiplexing
- Version for external condensing unit
- Stainless steel shelves & base decks
- Light plafond
- Night blind
- Wheels

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
PC2-ROM	23 5⁄8"	28 1⁄8"	55 1⁄8"	198 / 90	115V / 60Hz / 1ph 8 AMP
PC3-ROM	35 1⁄2"		55 1⁄8"	253 / 115	115V / 60Hz / 1ph 9.5 AMP
PC4-ROM	47 1⁄4"		55 1⁄8"	330 / 150	115V / 60Hz / 1ph 11.5 AMP

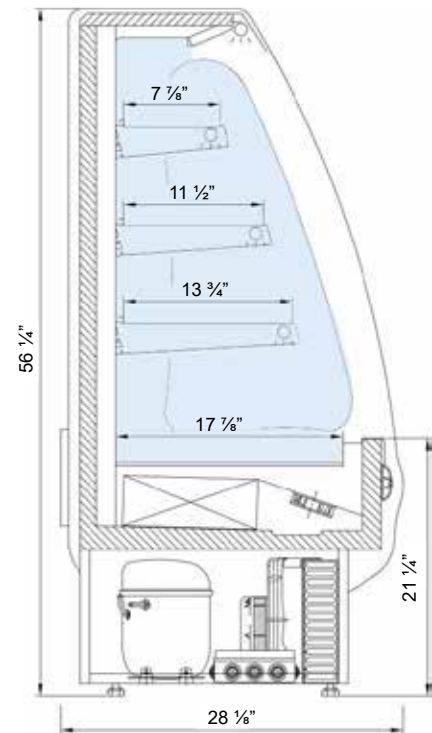

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Available Colors



OPEN MERCHANDISER

AT-ROM
REFRIGERATED OPEN MERCHANDISER



DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction & casing of powder-coated steel
- Glazed sides with grey serigraphy with PCV finishing
- 3 rows of adjustable shelves
- Highlighted shelves
- Top lighting
- White, LED lighting
- EPOS ticket strips
- Forced cooling
- Temp. range* : 0 ÷ +4 °C
- Automatic water evaporation
- Digital temperature control
- Access to condenser from the front
- Neutral corner with 3 rows of shelves
- Night blind


OPTIONS:

- External condensing unit (AZ)**
- Multiplexing (creating islands)
- Stoppers: wired or Plexiglas

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
AT2-ROM	23 5⁄8"	26"	54 1⁄2"	243 / 110	115V / 60Hz / 1ph 9.5 AMP
AT3-ROM	35 3⁄8"		54 1⁄2"	353 / 160	115V / 60Hz / 1ph 11.5 AMP
AT-CDOM	16 1⁄8" 29 7⁄8"		54 1⁄2"	66 / 30	Corner / Dry Unit
AT-ISLAND	95 1⁄4"	57 5⁄8"	54 1⁄2"	1455 / 660	According to Sizes

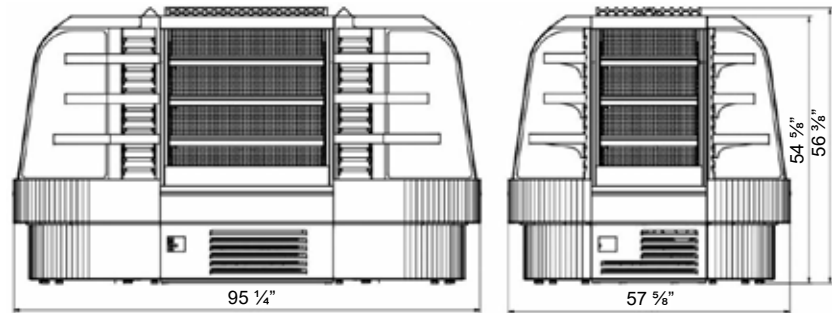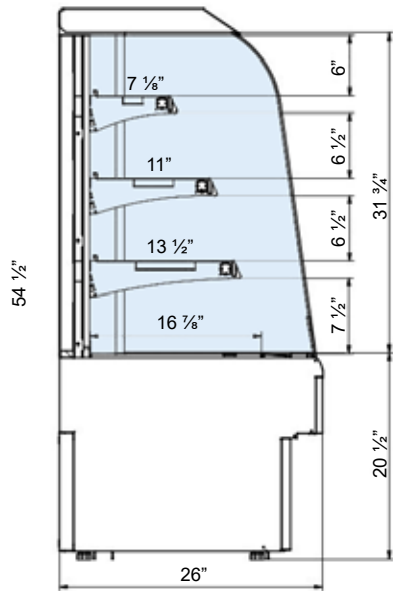

Available Colors



OPEN MERCHANDISER

TSC-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- 2 versions: refrigerated (CH), hot (GR)
- Construction of powder coated steel
- Finishes in stainless steel or powder coated steel
- Double front, and side glass with PCV finishing
- Perforated stainless steel back panel
- Highlighted (LED) and adjustable stainless still shelves
- Controller on the front or back
- Access to the condenser from the front
- Tempered glass
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Front opening glass

OPTIONS:

- Multiplexing
- Version for external condensing unit
- Stainless steel shelves & base decks
- Light plafond
- Night blind
- Wheels


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
TSC2-ROM	23 5⁄8"	29 1⁄2"	54 3⁄4"	198 / 90	115V / 60Hz / 1ph 8 AMP
TSC3-ROM	35 1⁄2"		54 3⁄4"	253 / 115	115V / 60Hz / 1ph 9.5 AMP
TSC4-ROM	47 1⁄4"		54 3⁄4"	330 / 150	115V / 60Hz / 1ph 11.5 AMP

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Wood Stains



Available Colors

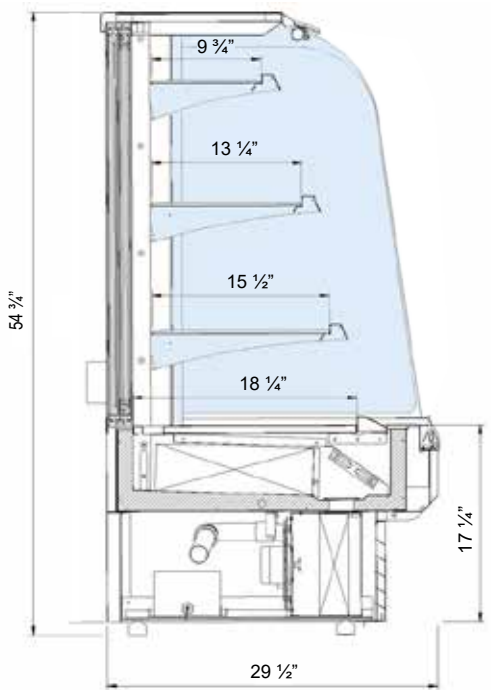

OPEN MERCHANDISER

TSS-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder coated steel
- Finishes in stainless steel or powder coated steel
- Double side glass with PCV finishing
- Perforated stainless steel back panel
- Highlighted (LED) and adjustable stainless still shelves
- Controller on the front or back
- Access to the condenser from the front
- Price strips
- Tempered glass
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation

OPTIONS:

- Multiplexing
- Version for external condensing unit
- Stainless steel shelves & base decks
- Light plafond
- Night blind
- Wheels


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
TSS2-ROM	23 5⁄8"	29 1⁄2"	54 3⁄4"	198 / 90	115V / 60Hz / 1ph 8 AMP
TSS3-ROM	35 1⁄2"		54 3⁄4"	253 / 115	115V / 60Hz / 1ph 9.5 AMP
TSS4-ROM	47 1⁄4"		54 3⁄4"	330 / 150	115V / 60Hz / 1ph 11.5 AMP

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.
** Cooling power demand: 1500 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.
*** In version with doors: only top lighting

Wood Stains



Available Colors

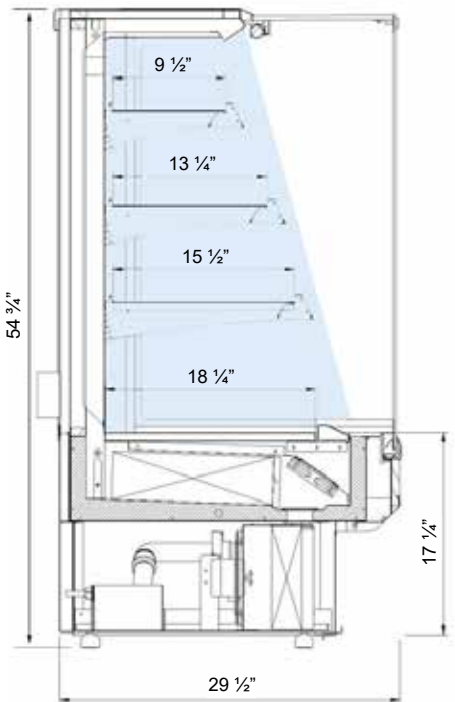



OPEN MERCHANDISER

RG-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- Double glass sides with serigraphy
- 5 rows of adjustable shelves
- Top lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Water evaporator pan
- Digital temperature control

OPTIONS:

- Multiplexing
- For external condensing unit
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Automatic water evaporation
- Shelf separators (wired)
- Profile with hooks
- Wood casing
- Wheels
- Heater under evaporator
- Sliding glass doors (in standard white frame, for request - black one)
- Hinged Plexiglas doors





RG-ROM

SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL	ELECTRICAL WITH DOORS
RG4-ROM	52 1/8"	31"	79"	485 / 220	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 12 AMP
RG5-ROM	62 1/4"			551 / 250	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
RG6-ROM	74 3/4"			617 / 280	220V / 60Hz / 1ph 10.5 AMP	220V / 60Hz / 1ph 8 AMP
RG7-ROM	82 7/8"			683 / 310	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
RG8-ROM	98 1/2"			749 / 340	220V / 60Hz / 1ph 19 AMP	220V / 60Hz / 1ph 9 AMP



* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Available Colors

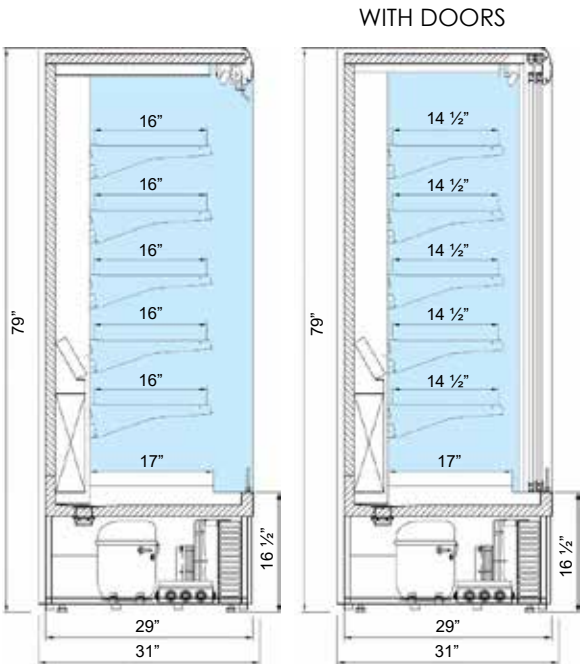

RGD-ROM



OPEN MERCHANDISER

MR-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- ABS sides with glass
- Grey bumper
- 4 rows of adjustable shelves
- Top lighting
- Light plafond
- White lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Digital temperature control

OPTIONS:

- Multiplexing
- For external condensing unit
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Shelf separators (wired)
- Profile with hooks
- Wood casing
- Wheels
- Heater under evaporator
- Automatic water Evaporation

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MR3-ROM	43 ¼"	34 ½"	79"	418 / 190	115V / 60Hz / 1ph 15 AMP
MR4-ROM	51 ½"			485 / 220	115V / 60Hz / 1ph 15 AMP
MR5-ROM	63"			551 / 250	220V / 60Hz / 1ph 15 AMP
MR6-ROM	74 ⅞"			628 / 285	220V / 60Hz / 1ph 11 AMP
MR7-ROM	81 ¾"			639 / 290	220V / 60Hz / 1ph 13 AMP

Wood Stains



Available Colors



OPEN MERCHANDISER

MRM-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- ABS sides with glass
- Grey bumper
- 4 rows of adjustable shelves
- Top lighting
- Light plafond
- White lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Digital temperature control

OPTIONS:

- Multiplexing
- For external condensing unit
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Shelf separators (wired)
- Profile with hooks
- Wood casing
- Wheels
- Heater under evaporator
- Automatic water Evaporation

SPECIFICATIONS - 25 ⅛" DEEP					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MMR3-ROM	43 ¼"	25 ⅛"	79"	374 / 170	115V / 60Hz / 1ph 15 AMP
MMR4-ROM	51 ½"			385 / 175	115V / 60Hz / 1ph 15 AMP

FORCED COOLING

R404a

115V 60Hz

AUTO


DIGITAL

PLUG IN

LED

* Temperature range given for maximum ambient temperature of +25°Cand relative humidity 60%.
** Cooling power demand: 1500 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.
*** In version with doors: only top lighting

Wood Stains



Available Colors





OPEN MERCHANDISER

VR-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction of powder-coated steel
- Sides of powder-coated steel: solid or glazed
- 5 rows of adjustable shelves
- White lighting
- Night blind
- EPOS ticket strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control

OPTIONS:

- Multiplexing
 - For external condensing unit
 - Highlighted shelves
 - Stainless steel shelves & base decks
 - Back panel from mirrored stainless steel
 - Angled mirrored stainless steel roof
 - Stoppers: wired or from Plexiglas
 - Vertical Plexiglas separator
- Shelf separators (wired)
 - Profile with hooks
 - Wood casing
 - Wheels
 - Heater under evaporator
 - Sliding glass doors (in standard white frame, for request - black one)
 - Hinged Plexiglas doors



OPEN MERCHANDISER

VRM-ROM
REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:


- LED lighting
- Construction of powder-coated steel
- Sides of powder-coated steel: solid or glazed
- 5 rows of adjustable shelves
- White lighting
- Night blind
- EPOS ticket strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control

OPTIONS:

- Multiplexing
 - For external condensing unit
 - Highlighted shelves
 - Stainless steel shelves & base decks
 - Back panel from mirrored stainless steel
 - Angled mirrored stainless steel roof
 - Stoppers: wired or from Plexiglas
 - Vertical Plexiglas separator
- Shelf separators (wired)
 - Profile with hooks
 - Wood casing
 - Wheels
 - Heater under evaporator
 - Sliding glass doors (in standard white frame, for request - black one)
 - Hinged Plexiglas doors




SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL	ELECTRICAL WITH DOORS
VR2-ROM	23 5/8"	30 3/4"	79"	265 / 120	115V / 60Hz / 1ph 11.5 AMP	115V / 60Hz / 1ph 11.5 AMP
VR3-ROM	43 1/4"			419 / 190	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VR4-ROM	51 1/8"			485 / 220	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VR5-ROM	63"			551 / 250	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VR6-ROM	74 3/4"			595 / 270	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
VR7-ROM	82 5/8"			639 / 290	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
VR8-ROM	98 1/2"			706 / 320	220V / 60Hz / 1ph 19 AMP	220V / 60Hz / 1ph 9 AMP

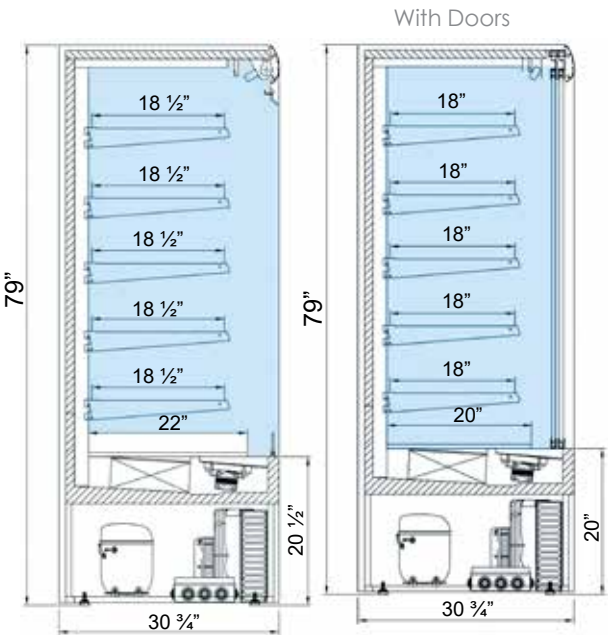


* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Available Colors



SPECIFICATIONS						
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL	ELECTRICAL WITH DOORS
VRM2-ROM	23 5/8"	24 1/2"	79"	265 / 120	115V / 60Hz / 1ph 11.5 AMP	115V / 60Hz / 1ph 11.5 AMP
VRM3-ROM	43 1/4"			419 / 190	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VRM4-ROM	51 1/8"			485 / 220	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VRM5-ROM	63"			551 / 250	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VRM6-ROM	74 3/4"			595 / 270	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
VRM7-ROM	82 5/8"			639 / 290	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
VRM8-ROM	98 1/2"			706 / 320	220V / 60Hz / 1ph 19 AMP	220V / 60Hz / 1ph 9 AMP


Wood Stains



Available Colors



* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.
** Cooling power demand: 1500 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.
*** In version with doors: only top lighting

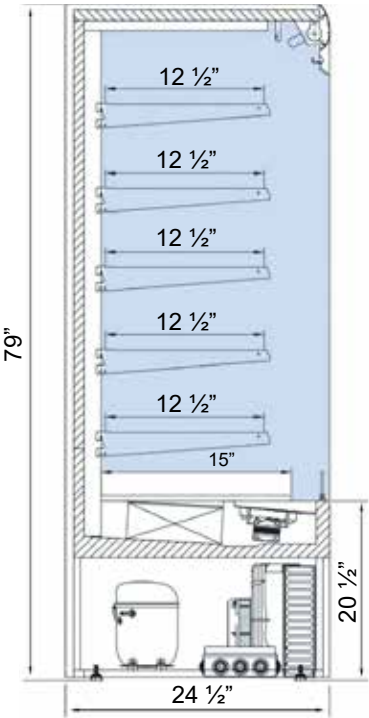

OPEN MERCHANDISER

YK-ROM

REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- 4 depths: 26", 30", 34" & 42"
- 2 heights: 78" & 88"
- LED lighting
- Internal corner
- Construction of powder-coated steel
- Sides of powder-coated steel or with glass
- Grey bumper
- 5 (PR) or 6 (PRP) rows of adjustable shelves
- Top lighting
- White lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: $0 \div +4^{\circ}\text{C}$
- Automatic defrosting
- Without automatic water Evaporation (designed for sewage system)
- For external condensing unit**
- Expansion valve

OPTIONS:

- Multiplexing
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas or stainless separator
- Shelf separators (wired)
- Profile with hooks
- Heater under evaporator
- Condensate pump
- Electromagnet /Solenoid valve
- Sliding glass doors (in standard white frame for request - black one)
- Hinged Plexiglas doors
- Electrical night blind

SPECIFICATIONS – PR-ROM 78" Height					
MODEL	L	D	H	WEIGHT (LBS / KG)	ELECTRICAL
YK4-ROM	47 ¼"	26 ¾" / 30 ½" / 34 ½"	78 ¾"	419/485/507/529 190/220/230/240	208V / 60Hz / 1ph 2 AMP
YK5-ROM	59"			529/572/595/617 240/320/340/360	208V / 60Hz / 1ph 2 AMP
YK6-ROM	70 ¾"			617/705/750/794 280/320/340/360	208V / 60Hz / 1ph 3 AMP
YK7-ROM	80"			705/750/772/838 320/340/350/380	208V / 60Hz / 1ph 3 AMP
YK8-ROM	94 ¾"			794/816/838/860 360/370/380/390	208V / 60Hz / 1ph 4 AMP
YK9-ROM	106 ¼"			860/926/948/992 390/420/430/450	208V / 60Hz / 1ph 4 AMP
YK10-ROM	122 ⅝"			948/992/1036/1102 430/450/470/500	208V / 60Hz / 1ph 5 AMP
YK12-ROM	147 ⅝"			1168/1235/1279/12390 530/560/580/620	208V / 60Hz / 1ph 6 AMP



SPECIFICATIONS – PRP-ROM 88" Height					
MODEL	L	D	H	WEIGHT (LBS / KG)	ELECTRICAL
YK4-ROM	47 ¼"	26 ¾" / 30 ½" / 34 ½"	88 ½"	463/530/551/573 210/240/250/260	208V / 60Hz / 1ph 2 AMP
YK5-ROM	59"			573/617/639/683 260/280/290/310	208V / 60Hz / 1ph 2 AMP
YK6-ROM	70 ¾"			683/772/816/860 310/350/370/390	208V / 60Hz / 1ph 3 AMP
YK7-ROM	80"			772/816/838/904 350/370/380/410	208V / 60Hz / 1ph 3 AMP
YK8-ROM	94 ¾"			860/882/904/926 390/400/410/420	208V / 60Hz / 1ph 4 AMP
YK9-ROM	106 ¼"			977/992/1036/1102 430/450/470/500	208V / 60Hz / 1ph 4 AMP
YK10-ROM	122 ½"			1036/1080/1124/1190 470/490/510/540	208V / 60Hz / 1ph 5 AMP
YK12-ROM	147 ¼"			1279/1345/1389/1477 580/610/630/670	208V / 60Hz / 1ph 6 AMP

Page 1 of 2



OPEN MERCHANDISER

Page 2 of 2

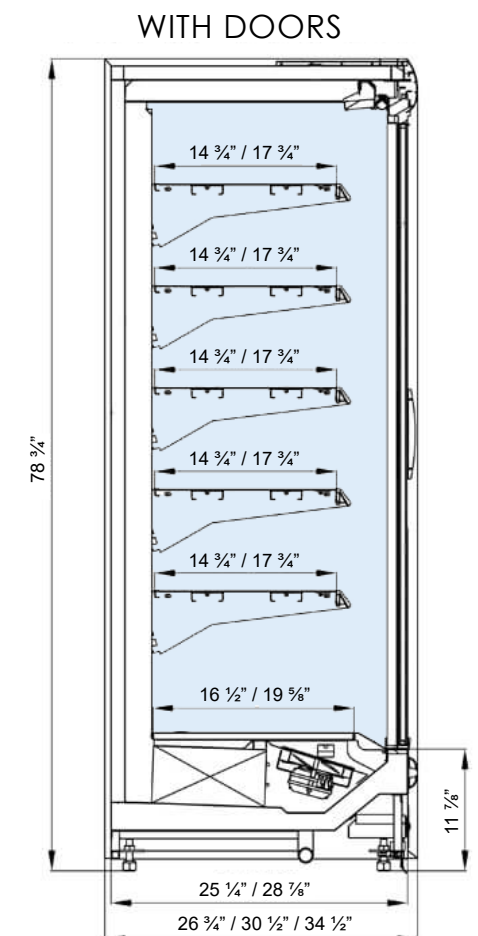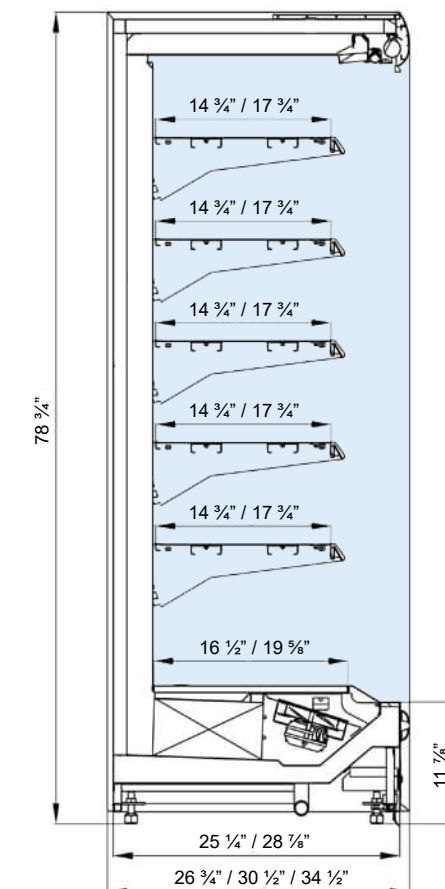


* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.


** Cooling power demand: 1500 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.

*** In version with doors: only top lighting

Available Colors





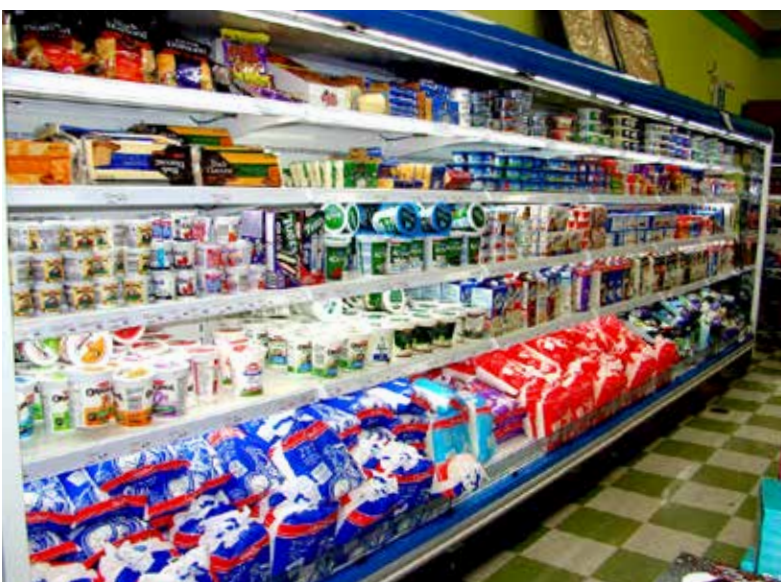

OPEN MERCHANDISER

DC-ROM


REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction of powder-coated steel
- MDF sides with glass
- 5 rows of adjustable shelves
- Top lighting
- Highlighted shelves
- White lighting
- Night blind
- EPOS ticket strips
- Forced cooling
- Temp. range* : 0 ÷ +4 °C
- Automatic water evaporation
- Digital temperature control

OPTIONS:

- Multiplexing
- External condensing unit (AZ)**
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Profile with hooks
- Wheels
- Heater under evaporator

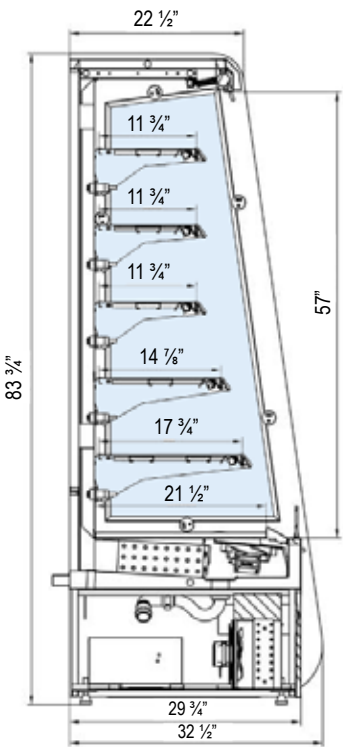


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
DC3-ROM	42 1/2"	32 5/8"	83 7/8"	441 / 200	115V / 60Hz / 1ph 15 AMP
DC4-ROM	50 1/4"		83 7/8"	485 / 220	115V / 60Hz / 1ph 15 AMP
DC5-ROM	60 1/4"		83 7/8"	551 / 250	220V / 60Hz / 1ph 13.5 AMP
DC6-ROM	74 1/8"		83 7/8"	595 / 270	220V / 60Hz / 1ph 13.5 AMP
DC7-ROM	81 7/8"		83 7/8"	639 / 290	220V / 60Hz / 1ph 15 AMP



* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Available Colors





OPEN MERCHANDISER



EL-ROM REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- Construction of powder-coated steel
- LED lighting
- Glass sides
- Grey bumper
- 4 rows of adjustable shelves
- Top lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- For external condensing unit**
- Expansion valve
- Digital temperature control


OPTIONS:

- Multiplexing (also creating islands)
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Shelf separators (wired)
- Condensate pump
- Electromagnet valve

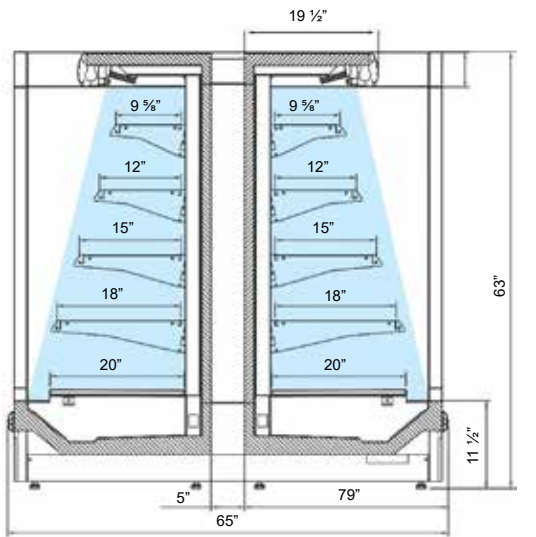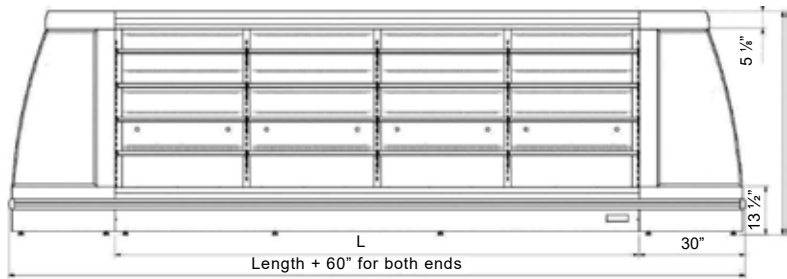

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
EL4-ROM	47 1/4"	30"	63"	396 / 180	220V / 60Hz / 1ph / 4 AMP
EL5-ROM	59"			529 / 240	220V / 60Hz / 1ph / 6 AMP
EL6-ROM	70 3/4"			639 / 290	220V / 60Hz / 1ph / 8 AMP
EL7-ROM	78"			727 / 330	220V / 60Hz / 1ph / 10 AMP
EL8-ROM	94 1/2"			410 / 903	220V / 60Hz / 1ph / 12 AMP
EL9-ROM	106 1/4"			1014 / 460	220V / 60Hz / 1ph / 12 AMP
EL10-ROM	118"			1146 / 520	220V / 60Hz / 1ph / 13 AMP
EL12-ROM	147 1/2"			1455 / 660	220V / 60Hz / 1ph / 14 AMP
ELS-ROM	64 3/4"			330 / 150	220V / 60Hz / 1ph / 8 AMP

Available Colors



* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.




EL-ROM



GLASS DOORS COOLER

OS-RD REMOTE COMPRESSOR
GLASS DOOR REFRIGERATED DISPLAY

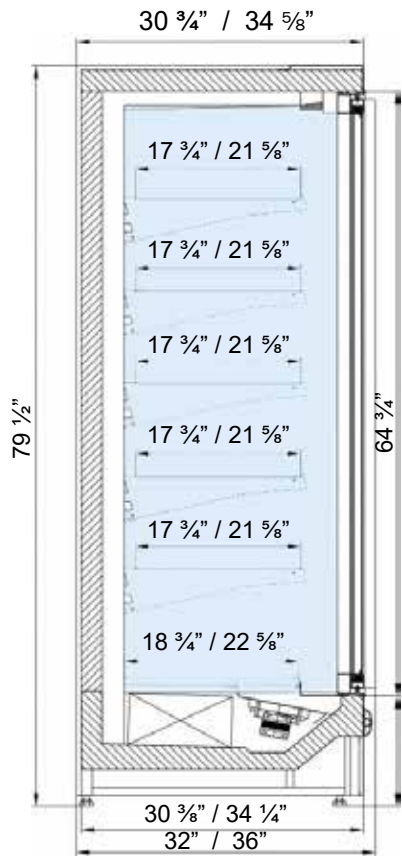

DESCRIPTION OF STANDARD UNIT:

- 2 depth: 32" & 36"
- LED lighting
- Construction of powder steel
- Sides of powder-coated steel
- Grey bumper
- 5 rows of adjustable, perforated shelves
- Low temperature e-doors, hinged
- Vertical lighting
- Price strips
- Forced cooling
- Temp. range* : 0 ÷ +4 °C
- External condensing unit**
- Expansion valve
- Without automatic water evaporation - designed for sewage system
- Digital temperature control

OPTIONS:


- Freezer version
- Temp range for freezer version* (OS-FD): -18 ÷ -22 °C
- Multiplexing
- Condensate pump
- Electromagnet /Solenoid valve

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
OS1-RD	36"	32" / 36"	79 1/2"	330 / 150	220V / 60 Hz / 1ph 2 AMP
OS2-RD	68 3/8"		79 1/2"	661 / 300	220V / 60 Hz / 1ph 3 AMP
OS3-RD	98 5/8"		79 1/2"	1080 / 490	220V / 60 Hz / 1ph 5 AMP




* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Available Colors



GLASS DOORS FREEZER

OS-FD REMOTE COMPRESSOR
GLASS DOOR FREEZER DISPLAY

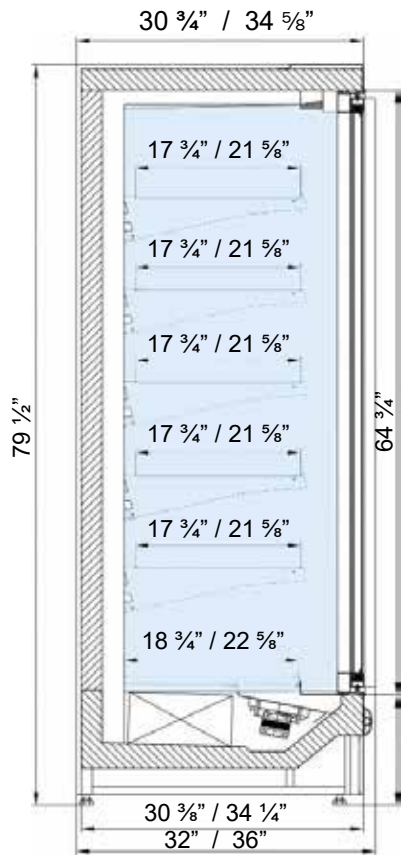

DESCRIPTION OF STANDARD UNIT:

- 2 depth: 32" & 36"
- LED lighting
- Construction of powder steel
- Sides of powder-coated steel
- Grey bumper
- 5 rows of adjustable, perforated shelves
- Low temperature e-doors, hinged
- Vertical lighting
- Price strips
- Forced cooling
- Temp. range* : -18 ÷ -22 °C
- External condensing unit**
- Expansion valve
- Without automatic water evaporation - designed for sewage system
- Digital temperature control

OPTIONS:


- Refrigerated version
- Multiplexing
- Condensate pump
- Electromagnet /Solenoid valve

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
OS1-FD	36"	32" / 36"	79 1/2"	330 / 150	220V / 60 Hz / 1ph 9 AMP
OS2-FD	68 3/8"		79 1/2"	661 / 300	220V / 60 Hz / 1ph 14 AMP
OS3-FD	98 5/8"		79 1/2"	1080 / 490	220V / 60 Hz / 1ph 20 AMP



* Temperature range given for maximum ambient temperature of +25°C and relative humidity 55%.
** Values are provided for an Evaporation temp. of -35°C, condensation temp. of +45°C, ambient temp of +30°C and relative humidity of 55%.

Available Colors






OS-RD & OS-FD _____

INOVATION FOR EVERY STORE

Design | Quality | High-Efficiency | Customer Service

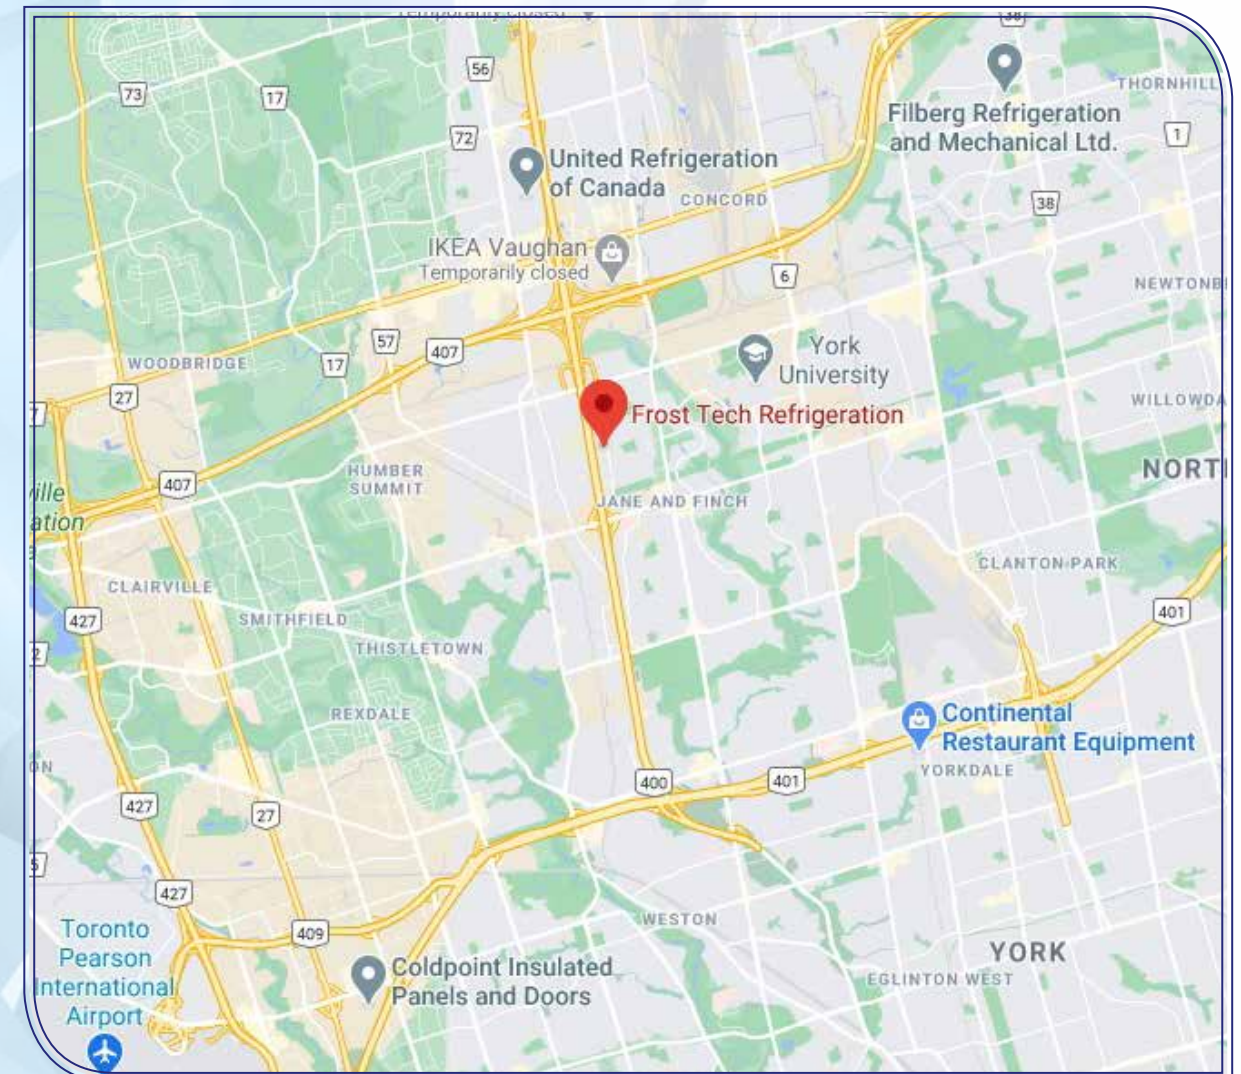

📍 154 Norfinch Dr Units 5 - 6, North York, Ont, M3N 1X6


☎ 416-665-0095 | 877-265-0095

✉ info@frosttechrefrigeration.com





FROST TECH
REFRIGERATION LTD.

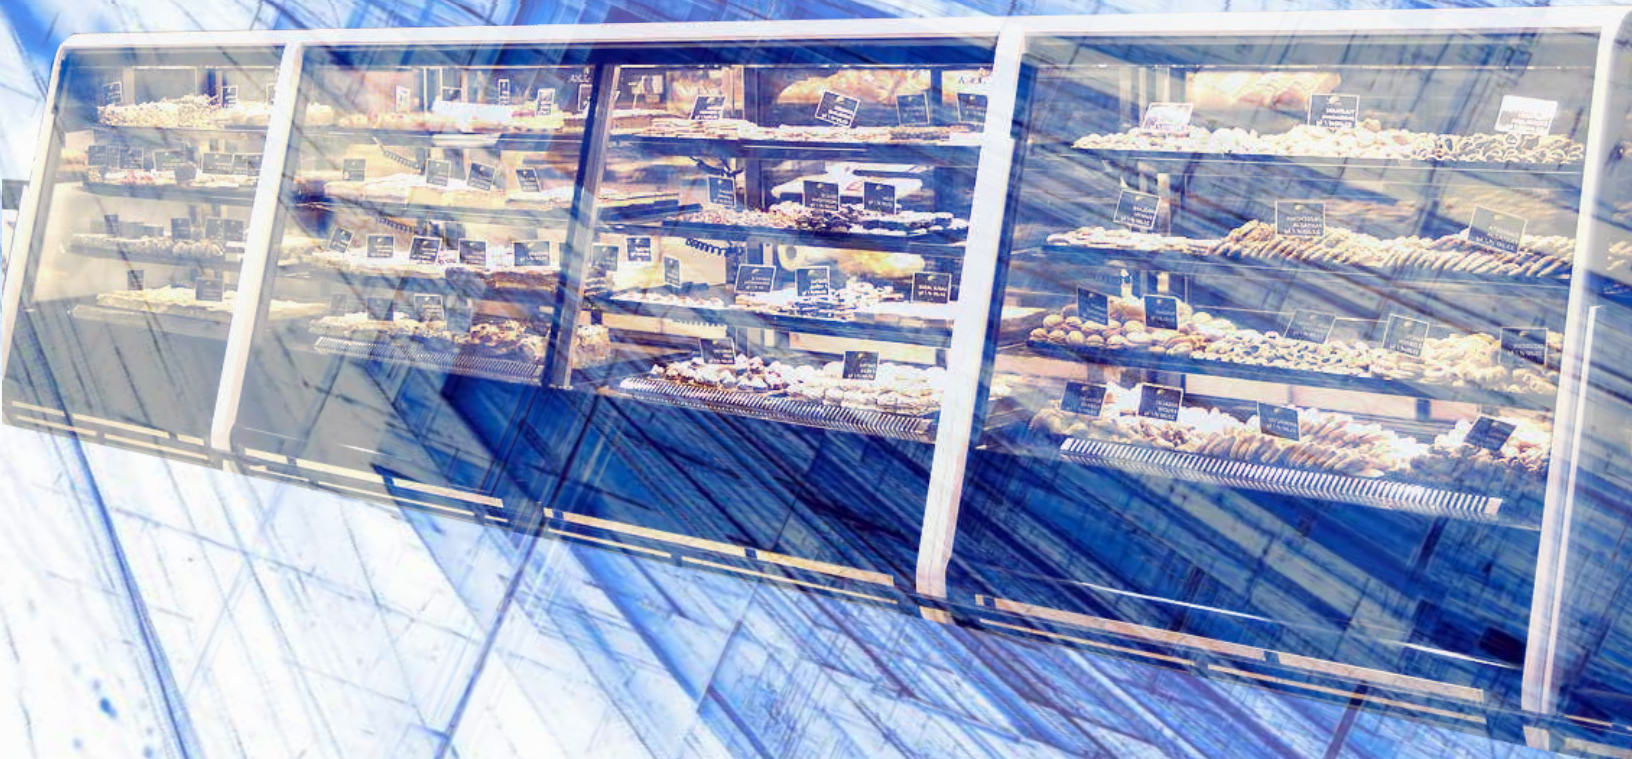

154 Norfinch Dr Units 5 - 6, North York, ON, M3N 1X6

Toll Free: 877-265-0095

www.frosttechrefrigeration.com info@frosttechrefrigeration.com