

# AMERICAN RANGE

Chef Inspired, Professional Cooking Equipment

## *Culinary Series* 30" RANGES

GAS TYPE: ☐ NATURAL ☐ LP

### STANDARD FEATURES

- Stainless steel rugged exterior.
- 6" deep front stainless steel bullnose landing ledge/work space.
- 6" High polished chrome adjustable steel legs.
- Heavy gauge welded frame construction.
- **Power-Plus** 32,000 BTU/hr. open burners, industry's highest.
- Polished glossy red knobs.
- One year limited warranty, parts and labor.

### STANDARD OVEN

- Sturdy, welded front frame provides stability to the range.
- Pull-off stainless steel door for easy cleaning.
- Thermostat controls temperature from 150°F to 500°F.
- One chrome plated oven rack (Additional racks optional).
- Porcelain enamel finish inside oven bottom, sides, back, and door liner.
- Steel burner rated at **Power-Plus** 35,000 BTU/hr.
- 100% safety gas shut off.
- Matchless push button ignition to light a standing pilot.



**Model Shown AR30-4B**  
Comes with optional casters  
and innovection oven.

**Power-Plus**  
32,000 BTU/hr. Burners




The **Culinary Series** Range by American Range was designed for continuous rugged use and performance. All the latest technology is incorporated to give you the best value for your money.

You need power? We give it to you with **Power-Plus** 32,000 BTU/hr. power burners, something you normally see with institutional series ranges. All stainless steel exterior is a standard feature for longevity and easy cleaning. Quality, dependability and customer satisfaction make American Range the ultimate choice.

Quality, dependability and customer satisfaction make American Range the **brand of choice among professional chefs and restaurateurs worldwide.**

# Culinary Series 30" RANGES

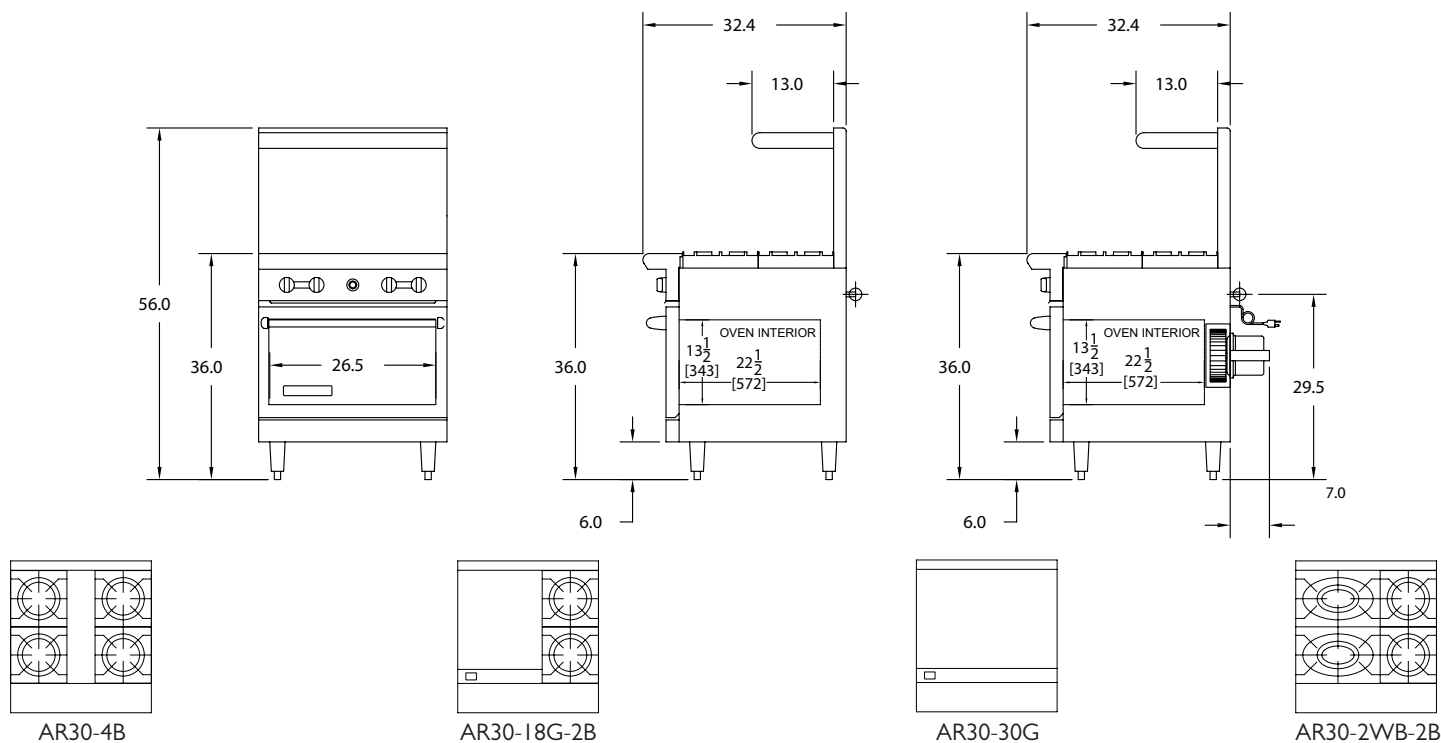

## 30" WIDE RANGE (26-1/2" Wide Oven)

Model	Description	Total BTU	KW	Shipping Weight	Lbs.	Kg.
AR30-4B	4 Burners with Spreader	163,000	48		540	245
AR30-18G-2B	18" Griddle & 2 Burners	129,000	38		553	251
AR30-30G	30" Griddle	85,000	25		581	264
AR30-2WB-2B	4 Burners, 2 with large grates	163,000	48		540	245

### POWER-PLUS BURNERS

- Heavy duty sectioned cast iron top grates.
- Two piece, lift-off top, easy clean burners, rated at **Power-Plus** 32,000 BTU/hr. each.
- One standing pilot for each burner, for instant ignition.
- Removable full width drip pan.

### RADIANT BROILER

- Heavy castings retain heat to minimize recovery time during peak periods.
- Heavy duty reversible top grates with integral runners direct grease to trough.
- Efficient top-ported burners are rated at 15,000 BTU/hr. each with individual pilot and precision brass valves.

### GRIDDLES

- Highly polished thick steel griddle plate.
- 3" (76) wide grease drawer.
- One steel burner every 12" (305), rated at **Power-Plus** 20,000 BTU/hr.
- Stainless steel pilot for each burner for automatic ignition.
- Manual control valve for each burner.
- Stainless steel spatula-width, grease trough with landing ledge.

### AVAILABLE OPTIONS

- 6" (152) stub back.
- Casters (set of 4).
- Additional chrome oven rack.
- Cabinet base.
- Thermostatic Control Griddle.
- Grooved griddle.
- Fish grate (only for radiant broiler).
- Convection Oven.
- Innovection Oven.

### GAS SUPPLY:

3/4" NPT Gas inlet. Manifold pressure is 5.0" W.C. for natural gas or 10.0" W.C. for propane gas. Specify type of gas and altitude if over 2000 feet.

### CLEARANCES:

For use only on non-combustible floors. Legs or casters are required, or 2" (51) overhang is required when curb mounted. Clearance from non-combustible walls is 0". When unit is placed next to combustible walls, clearances must exceed 12" (305) on sides, and 4" (102) from rear. Radiant broilers for non-combustible locations only.

American Range is a quality manufacturer of commercial cooking equipment. Because of continuing product improvements these specifications are subject to change without prior notice.